


CAD FILE:

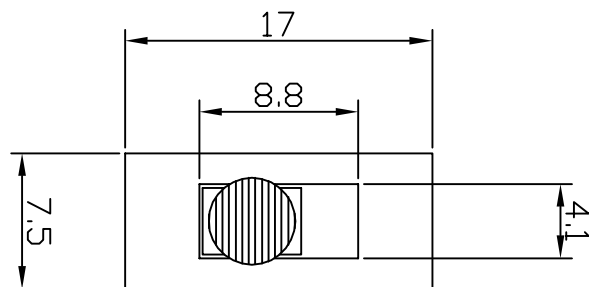

SPECIFICATION


RATING:DC 30V 0.3A

CONTACT RESISTANCE:100mohm MAX (INITIAL)




INSULATION RESISTANCE:100MohmAT 500VDC

WITHSTAND VOL TAGE:AC 500V FOR 1 MIN

OPERATIONFORCE:REFERATTACHSPECIFICATION

SWITCHING LIFE:10000 CYCLES(15-18C/M UNL
OAOING)

CIRCUIT DIAGRAM

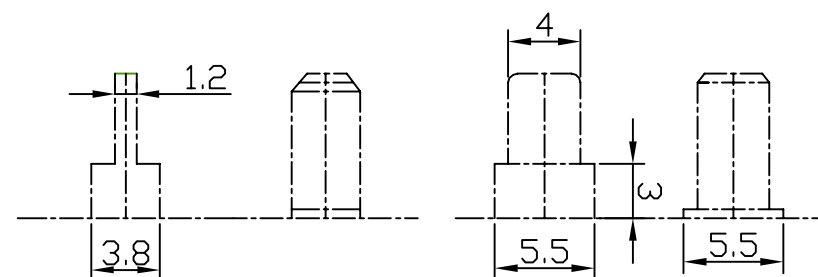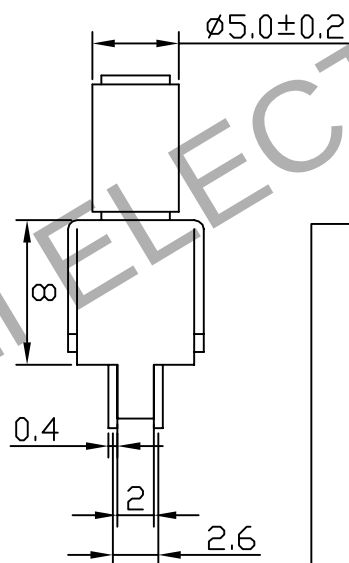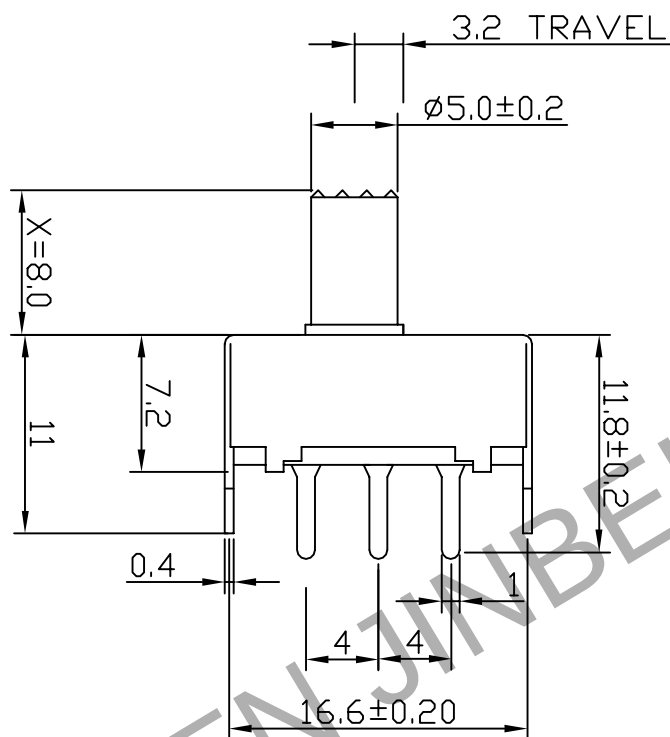

NAT

NT

8					TOLERANCE UNLESS SPECIFIED				
7									
6	SPRING	STAINLESS STEEL STRIP	2	Ag PLATED	WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°				
5	TERMINAL	BRASS STRIP	6	Ag PLATED	ISSUE	DATE	DESCRIPTIONS	APPD.	
4	TERMINAL BASE	PHENOL IC RESIN	1	NATURE	TITLE:SLIDE SWITCH				
3	CLIP	PBS	2	Ag PLATED	UNIT:mm		DRWG. NO.:		
2	SHELL	MILD STEEL	1	Ni PLATED	MODEL NO: SS-22F006AT8.0		SCALE:4:1		DWN
1	KNOB	POM	1	BLACK	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD		CHK'D		
NO.	DESCRIPTION	MATERIAL	QTY	PLATING			APPD.		