

MLC65C-P3/MLC65C-P4/MLC65C-P5
ON-OFF/ 3-step Dimming Function
For Tri-proof Light


MLC12C-P2D
ON-OFF/ 3-step Dimming Function
For 2D LED Ceiling Light



Detection area*

100%	2m	3m
75 %	1m	2m
50 %	0.5m	1.5m
25%	0m	0.5m

*These data were tested by a 165cm height person and his walking speed is 1m/s.

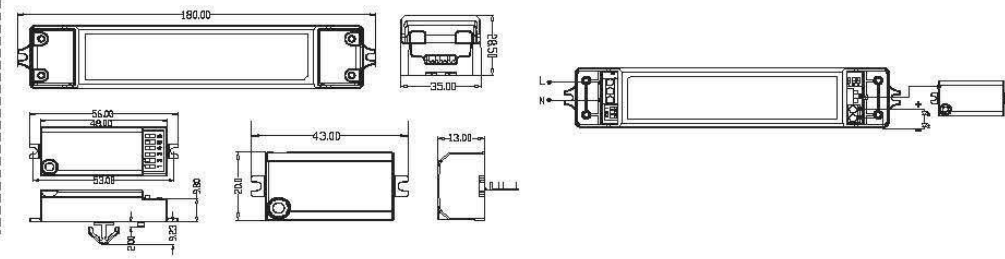

SPECIFICATIONS

	MLC65C-P3	MLC65C-P4	MLC65C-P5
Input Voltage	220~240Vac	220~240Vac	220~240Vac
Output	1500mA, 30-42V	35-55Vdc, 600mA/925mA/1050mA/1200mA	1400mA, 30-42V
HF system	5.8GHz±75MHz, ISM wave band	5.8GHz±75MHz, ISM wave band	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW	<0.5mW	<0.5mW
Power consumption	≤1W(stand-by)	≤1W(stand-by)	≤1W(stand-by)
Detection Area(Radius)	6m Max.	6m Max.	6m Max.
Max. Mounting height	6m	6m	6m
Daylight sensor	5lux/15lux/ 30lux/Disable	10lux/30lux/50lux/100lux/Disable	5lux/15lux/ 30lux/Disable
Hold time	5s/90s/3min/10min	5s/90s/5min/25min	5s/90s/3min/10min
Stand-by Period	0s/30s/10min/+∞	1min/5min/25min/ +∞	0s/30s/10min/+∞
Stand-by DIM Level	10%/25%	0%/10%/25%/50%	10%/25%
Operating temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
IP rating	IP20	IP20	IP20

SPECIFICATIONS

Input Voltage	220~240Vac
Output	30-42Vdc, 270mA
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	≤1W(stand-by)
Detection Area(Radius)	6m Max.
Max. Mounting height	6m
Daylight sensor	5lux/15lux/50lux/disable
Hold time	5s/90s/3min/10min
Stand-by Period	0s/30s/10min/ +∞
Stand-by DIM Level	20%/30%
Operating temperature	-25℃~50℃
IP rating	IP20

Detection Pattern (max / min)

Detection area*

100%	2m	2.5m
75 %	1m	1.5m
50 %	0.5m	1m
10%	0m	0.5m

*These data were tested by a 165cm height person and his walking speed is 1m/s.