



635nm, 650nm Laser Module

<1mW, <5mW, <10mW

Low Cost, Red laser, Spot beam

Model: LDM6XX-A-B-C-D-1-4

* A - power(mW), B – Diameter(mm), C - length(mm), D - lens material(P or G)

Features:

- Red dot laser
- Auto current control (APC) driver.
- Low Cost.
- Full metal jacket protection and PCB sealed by epoxy.
- Robust structure, shock resistance.
- Function option: APC, ACC, TTL, Power adjusted by input signal.
- Available wavelength: 635nm, 650nm, 830nm, 850nm

Specifications:

No	Parameters	Value
1	Peak Wavelength	635nm, 650nm
2	Operation Voltage	2.6-6V
3	Operation Current	<40mA @ 635nm <25mA @ 650nm
4	Output Power	<1mW, <5mW, <10mW
5	Collimating Lens	Plastic or Glass
6	Divergence (Full angle)	<0.5mrad, <1mrad or customized
7	Spot Size at 10m	5mm, 10mm, or customized
8	Operation Temperature *	-10 °C ~ +40 °C
9	Storage Temperature	-40 °C ~ +85 °C
10	Dimension	Diameter: 9mm, 10mm or customized
11	Housing	Brass or Anodized Aluminum
12	Mean time to failure(MTTF) 25 °C	10000hrs


* 60 °C operation temperature product is available.



635nm, 650nm Laser Module

<1mW, <5mW, <10mW

Low Cost, Red laser, Spot beam

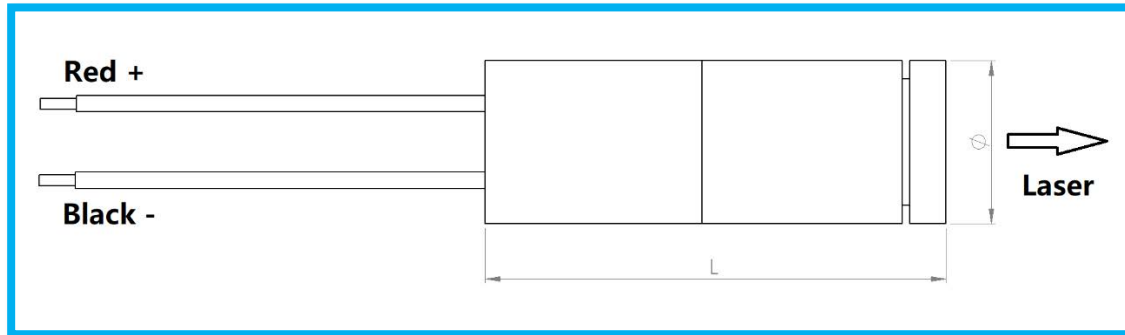

Standard Products:

Part Number	Description
LDM635-A-9-24-P-1-4	635nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 24$ mm, Aspherical Plastic lens
LDM635-A-9-26-G-1-4	635nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 26$ mm, Aspherical Glass lens
LDM635-A-9-28-G-1-4	635nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 28$ mm, Spherical Glass lens
LDM650-A-9-24-P-1-4	650nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 24$ mm, Aspherical Plastic lens
LDM650-A-9-26-G-1-4	650nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 26$ mm, Aspherical Glass lens
LDM650-A-9-28-G-1-4	650nm, spot laser, A<1, 5, 10mW, $\Phi 9 \times 28$ mm, Spherical Glass lens

Cautions

- Do not operate the device above the maximum rating condition, even momentarily. It may cause unexpected permanent damage to the device
- Semiconductor laser device is very sensitive to electrostatic discharge. High voltage spike current may change the characteristics of the device, or malfunction at any time during its service period. Therefore, proper measures for preventing electrostatic discharge are strongly recommended.



Z-OPTICS LIMITED

12# Qiao Xia Nan Road, Bei Bai Xiang, Yue Qing,
Zhejiang Province, 325603 P. R. China

Tel: +86-577-8181-0885,

Web site: www.z-optics.com

E-mail: sales@z-optics.com



635nm, 650nm Line Laser Module

<1mW, <5mW, <10mW

Low Cost, Red laser, Line beam

Model: LDM6XX-A-B-C-D-2-4

* A - power(mW), B – Diameter(mm), C - length(mm), D - lens material(P or G)

Features:

- Red line laser
- Auto current control (APC) driver.
- Low Cost.
- Full metal jacket protection and PCB sealed by epoxy.
- Robust structure, shock resistance.
- Function option: APC, ACC, TTL, Power adjusted by input signal.
- Available wavelength: 635nm, 650nm, 830nm, 850nm

Specifications:

No	Parameters	Value
1	Peak Wavelength	635nm, 650nm
2	Operation Voltage	2.6-6V
3	Operation Current	<40mA @ 635nm <25mA @ 650nm
4	Output Power	<1mW, <5mW, <10mW
5	Collimating Lens	Plastic or Glass
6	Divergence (Full angle)	Customized
7	Line thickness at 10m	<7mm
8	Operation Temperature *	-10 °C ~ +40 °C
9	Storage Temperature	-40 °C ~ +85 °C
10	Dimension	Diameter: >10mm
11	Housing	Brass or Anodized Aluminum
12	Mean time to failure(MTTF) 25 °C	10000hrs


* 60 °C operation temperature product is available.



635nm, 650nm Line Laser Module

<1mW, <5mW, <10mW

Low Cost, Red laser, Line beam

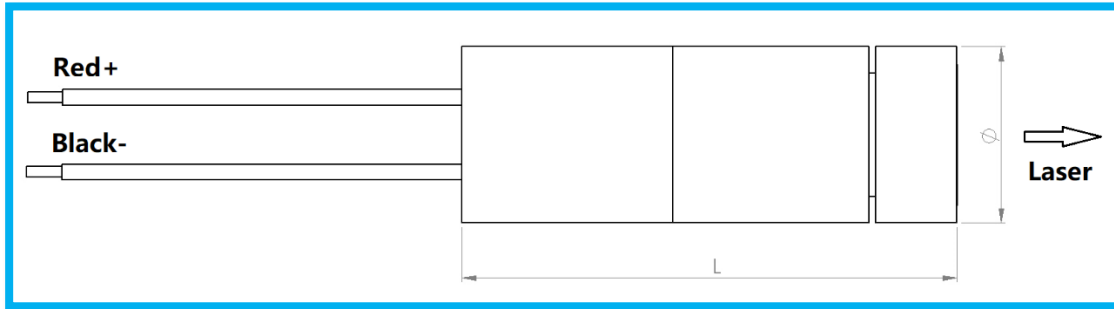

Standard Products:

Part Number	Description
LDM635-A-10-26-P-2-4	635nm, spot laser, A<1, 5, 10mW, Φ 10x26mm, Aspherical Plastic lens
LDM635-A-10-28-G-1-4	635nm, spot laser, A<1, 5, 10mW, Φ 10x28mm, Aspherical Glass lens
LDM635-A-10-30-G-1-4	635nm, spot laser, A<1, 5, 10mW, Φ 10x30mm, Spherical Glass lens
LDM650-A-10-26-P-1-4	650nm, spot laser, A<1, 5, 10mW, Φ 10x26mm, Aspherical Plastic lens
LDM650-A-10-28-G-1-4	650nm, spot laser, A<1, 5, 10mW, Φ 10x28mm, Aspherical Glass lens
LDM650-A-10-30-G-1-4	650nm, spot laser, A<1, 5, 10mW, Φ 10x30mm, Spherical Glass lens

Cautions

- Do not operate the device above the maximum rating condition, even momentarily. It may cause unexpected permanent damage to the device
- Semiconductor laser device is very sensitive to electrostatic discharge. High voltage spike current may change the characteristics of the device, or malfunction at any time during its service period. Therefore, proper measures for preventing electrostatic discharge are strongly recommended.



Z-OPTICS LIMITED

12# Qiao Xia Nan Road, Bei Bai Xiang, Yue Qing,
Zhejiang Province, 325603 P. R. China

Tel: +86-577-8181-0885,

Web site: www.z-optics.com

E-mail: sales@z-optics.com