


SUPER SLIM LED PLUG-IN DRIVER WITH CONNECTOR SOCKET OR WITH OUTPUT CABLE

3.6W / 6W(A/B)



Super Slim
18mm





GENERAL FEATURES

- PRI: 220-240V 50/60Hz
- SELV equivalent
- RI suppression according to the new EMC standard
- Slim design, minimize the distance between furnitur and wall
- Integrated LED connector socket, make the different cable length possible

12W / 15W(A/B)



Super Slim
18mm

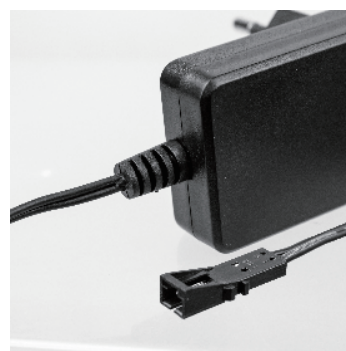

A Type



B Type

DIY Structure
Easy to connect

MODEL NO.	INPUT VOLTAGE	INPUT FREQUENCY	OUTPUT VOLTAGE	OUTPUT CURRENT(MA)	POWER FACTOR	MAX.LOAD	STANDBY COMSUMPTION	AMBIENT TEMPERATURE	DIMENSION (MM) LXWXH
SNT-3.6WP	220-240V AC	50/60Hz	12V	100-1250mA	0.75	3.6W	<0.1W	-20°C...+40°C	65x42x56mm
SNT-6WP	220-240V AC	50/60Hz	12V	100-625mA	0.75	6W	<0.1W	-20°C...+40°C	65x42x56mm
SNT-12WP	220-240V AC	50/60Hz	12V	100-1660mA	0.72	12W	<0.5W	-20°C...+40°C	83x42x56mm
SNT-15WP	220-240V AC	50/60Hz	12V	100-830mA	0.76	15W	<0.5W	-20°C...+40°C	83x42x56mm

ErP



RoHS

EN 61347-1
EN 61000-3-2

EN 61347-2-13
EN 61000-3-3

EN 55015
EN 61547