
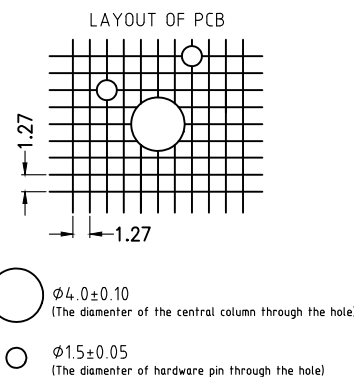



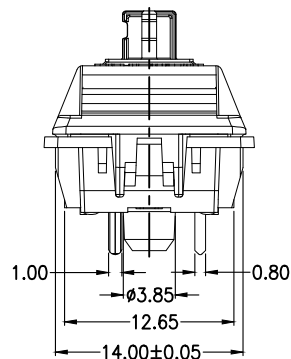


RoHS


REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	YC.CHEN 25/11/05		

TECHNICAL PARAMETER


- 1.RATING: 10mA DC 2V
- 2.CONTACT RESISTANCE: $\leq 200m\Omega$
- 3.INSULATION RESISTANCE: $\geq 100M\Omega$
- 4.DIELECTRIC STRENGTH: 100V 50HZ 1Min
- 5.OPERATING FORCE: $55\pm 15gf$
- 6.MECHANICAL LIFE: 100,000,000 ORDER
- 7.TRIP: $4.0\pm 0.5mm$
- 8.OPERATING TEMPERATURE: $-10^{\circ}C$ to $+70^{\circ}C$



Keyswitch assembly



WITH PINS

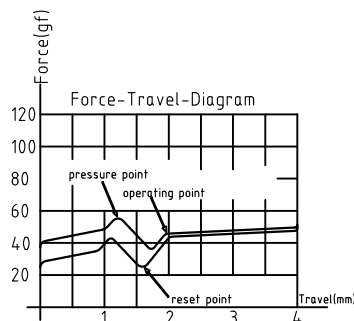

BILL OF MATERIAL :

7	CASE	1	FSPG-150T02-00-07	THERMOPLASTICS	WHITE
6	CONTACT	1	FSPG-150T02-00-06	Au ALLOY	/
5	COVER	1	FSPG-150T02-00-05	THERMOPLASTICS	TRANSPARENT
4	SPRING	1	FSPG-150T02-00-04	STAINLESS STEEL	/
3	KEYSTROKE	1	FSPG-150T02-00-03	THERMOPLASTICS	BROWN
2	STATIC	1	FSPG-150T02-00-02	COPPER ALLOY	/
1	MOVABLE	1	FSPG-150T02-00-01	COPPER ALLOY	/
ITEM	PART NAME	Q'TY	DRAWING NO	MATERIAL	FINISH

GENERAL TOLERANCE	
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10

ANGLE TOLERANCE	
X°	±3.0°
.X°	±2.0°
.XX°	±1.0°

MAJOR (QC CHECKED) :
▼ = 2 Places
CONTROL POINT
FAI : to
CRITICAL (Cpk & Cp) :
[X] = Places

SHEET 1 OF 1



东莞市福顺电子科技有限公司
DONGGUAN FOSUN ELECTRONICS TECHNOLOGY CO.,LTD

DESIGN	DATE
YC.CHEN	25/11/05
CHECK	DATE
JX.ZHOU	25/11/05
APPROVED	DATE
David YU	25/11/05

TITLE: SERIEC G BROWN PRE 3.0
FSPG-150T02

SERIES:	Keyboard switch	SIZE	A4
DRAWIN NO:	FSPG-150T02-00-00	REV	A