

4

3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2009-12-15

Technical Data

Material:


Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over 50μ " Ni
Insulator Material: Black Polyester UL94V-0
Standard: PA6T +30%G.F

Electrical:


Current rating: 3.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 1000V AC/minute

Mechanical:



Mechanical life cycle: min. 200
Operating temperatures: Gold Plated: -55° C to +105° C
Tin plated: -40° C to +105° C
Soldering temperature: +260° C max(PA6T)

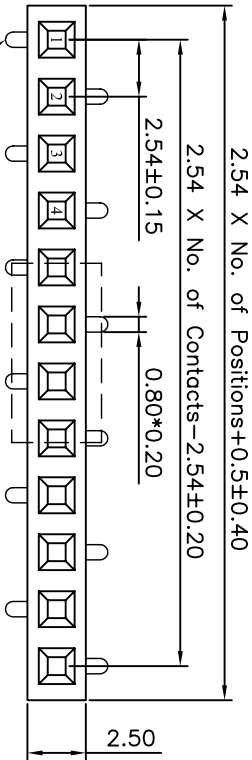


A Type

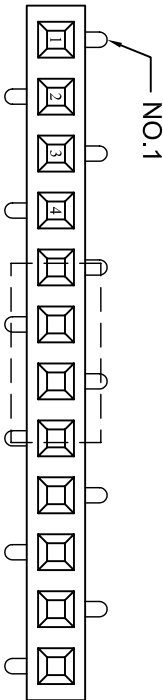

B Type

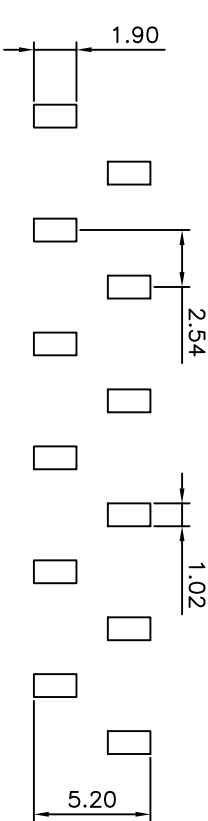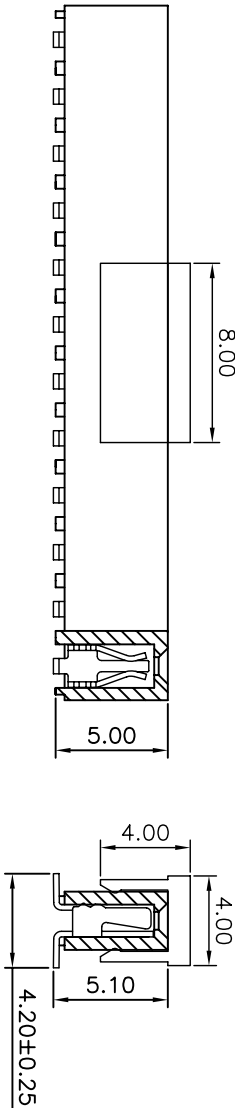

A Type P.C.B LAYOUT

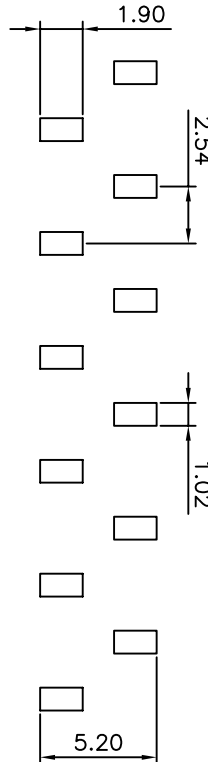

B Type P.C.B LAYOUT

F128	11	XXX	XX	X	C	B	N	A	00
Product Descriptions F128 H=5.0	Product Type 11 Single row	No. of Positions XXX Poles	Pin Plating G0 Gold Flash SN Tin Plated	Angle options A SMT/A Type B SMT/B Type	Insulator Material A PBT B PA66 C PA6T D LCP	Color B Black L White G Green Y Yellow R Red N Natural	Series NO. A OE=4.20mm		

ANYCONN® 东莞市精捷电子有限公司

DONGGUAN ANYCONN ELECTRONIC CO.,LTD

TOLERANCE		PROJECTION		TITLE:	
ANGLE	± 5°			Pitch 2.54 HS 0mm Single Row SMT Female Header	
X.XXX	± 0.10	DATE :	2009-12-15	DRAWN :	Fugianshan
X.XX	± 0.20	CHECKED :		PART NO.:	F12811XXXXXXCBNA00
X.X	± 0.30	DRAWING NO.:	ANC-F12811XXXXXXCBNA00	REV:	A0
X.	± 0.50	APPROVED :		UNIT:	mm
				SCALE:	3:1
				SIZE:	A4

A

B

C

D

A

B

C

D

4

3

2

1