




TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278



FC-FC Patch cord

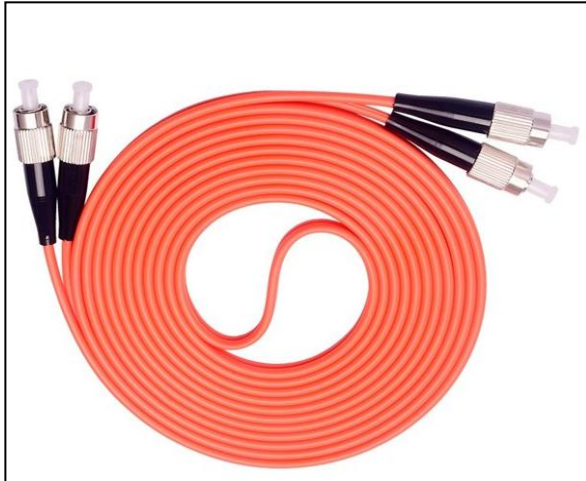

Duplex



Simplex

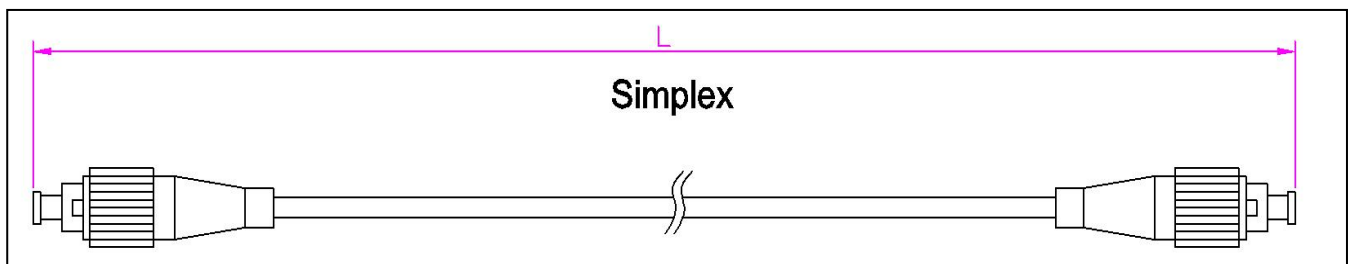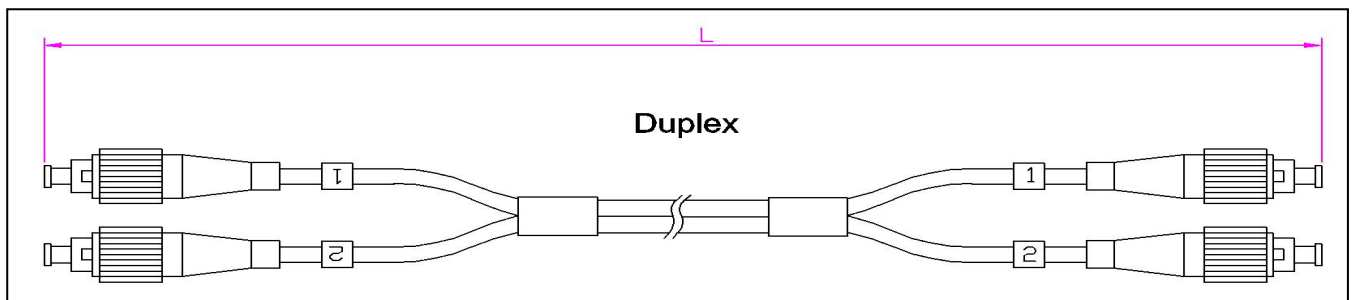

Applications:

- CATV
- Telecommunication networks
- Active device termination
- Local area networks(LANS)
- Data processing networks
- Test equipment
- Wide area networks(WANS)



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278

Features:

- Low insertion loss and High reflection loss
- Good exchange ability
- Good durability
- High temperature stability
- Standard: Telcordia GR-326-CORE

Specifications:

End face type	UPC and APC
Fiber type	SM (G652、G655、G657) ; MM (OM1-OM5)
Cable Diameter	2.0、3.0 or customized (Simplex/duplex)
Insertion loss	$\leq 0.3\text{dB}$
Return loss	UPC SM $\geq 50\text{dB}$ 、APC SM $\geq 60\text{dB}$ 、UPC MM $\geq 35\text{dB}$
Repeatability	≤ 0.1
Durability	$\leq 0.2\text{dB}$
Interchangeability	$\leq 0.2\text{dB}$
Tensile strength	$>70\text{N}$
Operating Temperature	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Storage Temperature	$-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$
Outer Sheath Material	PVC、LSZH、TPU
Bending radius (Static/Dynamic)	10D/20D
Length	Customized