
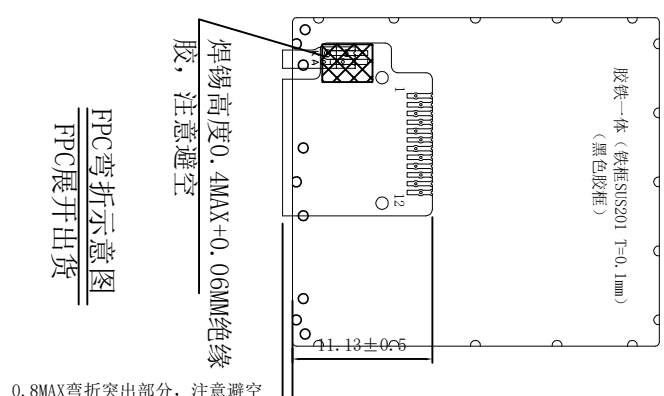
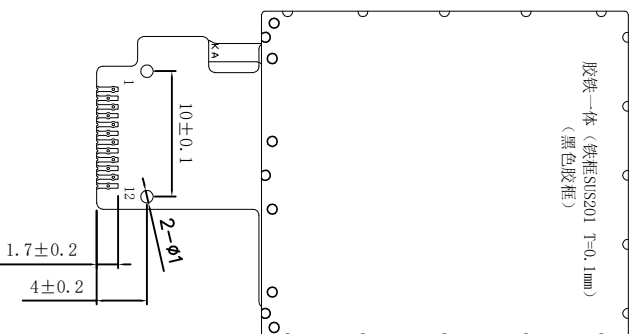


revision	date	note
1	2022/03/03	The first version

LCD薄化至
TFT=0.2MM, CF=0.2MM

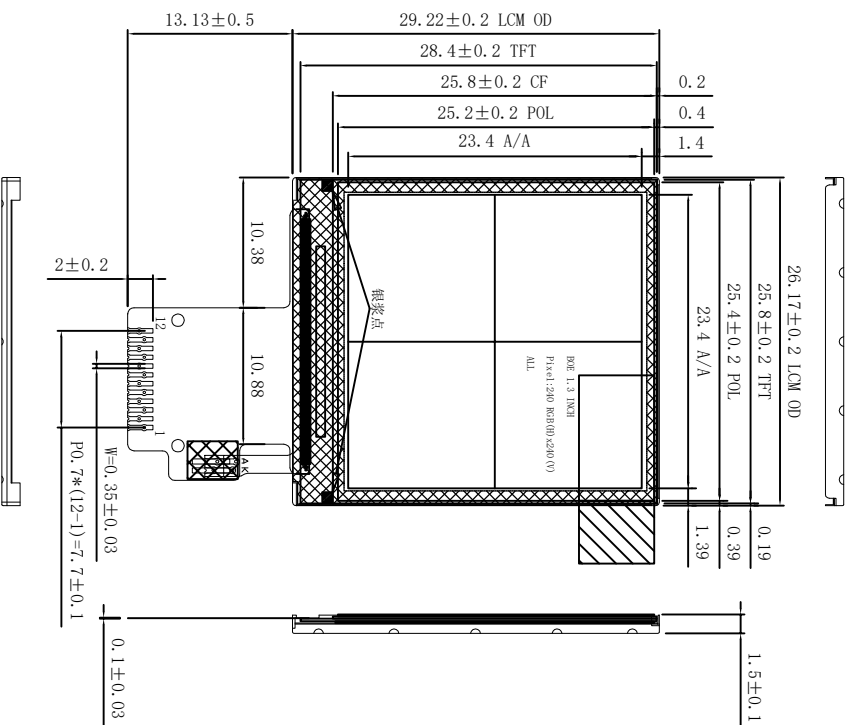


PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND

由 Autodesk 教育版产品制作

pecification

1. Display: 1.30 INCH
2. IC: ST7789V3
3. visual angle: ALL
4. Dot Matrix: 240 RGB(H)X240(V)
5. Active Area: 23.4(H)X23.4(V)
6. Interface: SPI4
7. TRANSMISSION: 4.0(MIN), 4.5%(TYP)
8. BACKLIGHT: 2 CHIP-WHITE LED
9. Operating Temperature: -20°C~70°C
10. Storage Temperature: -30°C~80°C



IF=40MA , VF=2.8V-3.3V

PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND

General Tolerance		制图	审核	批准	PROJECT CODE	
Length (mm)	Tolerance(mm)	C. W			FTH130I000TS01	
0 ~ 8	±0.1				PART NAME	REVISION
8 ~ 25	±0.2				LCM Module	1
25 ~ 50	±0.3	20220510			PARTS DES.	Sheet