


REV	DC/EC NUMBER	DESCRIPTION	DATE


FRONT VIEW

SIDE VIEW

BACK VIEW

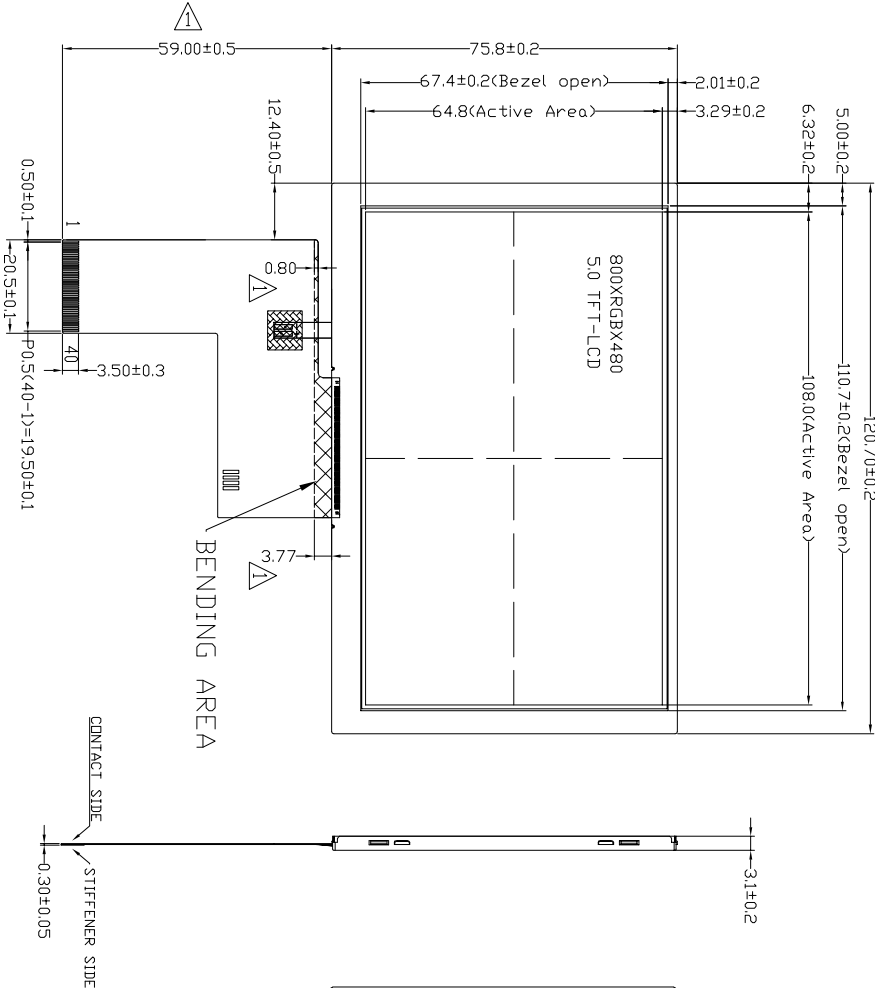

LED CIRCUIT:



If=40mA, Vf=16.8V~21V

- NOTES:
1. DISPLAY TYPE: 65/262K Colors LCD, Transmissive, Normal White
 2. OPERATING TEMP.: -20°C~70°C
 3. STORAGE TEMP.: -30°C~80°C
 4. LCD DRIVER: ILI6122+ILI5960 or Equivalent
 5. BACKLIGHT: 12CHIP-WHITE LED,Parallel connection If=40mA
 6. Brightness:500cd/m² TYP.
 7. UNMARKED TOLERANCE: ±0.2
 8. RDHS Complain

CONTROL DIMENTION		REFERENCE DIMENTION		MODEL NAME		PART NAME		3rd ANGLE	
APPROVED:		JOBS		XINSUN DISPLAY INTEGRATION		XF050WV12A-TTHL V00		mm	
CHECKED:		ERIC		DRAWING NUMBER		SCALE		1:1	
DESIGNED:		ISSCA		MATERIAL NUMBER		PAGE		1/1	