
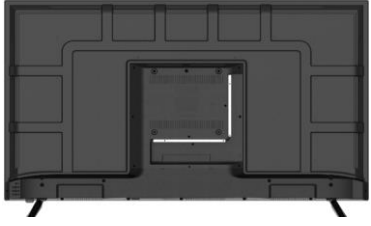




# GAO SU DA TECHNOLOGY CO.,LTD

Addr: 5th Floor ,Building A , No.15 Venture Industrial Zone ,Songgang Street, Bao an District ,ShenZhen ,China  
M: 86- 13570680992, Web: www.globalsources.com/gsdteco ; Email : rainbow@justallwin.com

<b>PICTURE</b>		
<b>Size</b>	GSD-LG506600 (2KDLED)	GSD-LG506600 (2KDLED)
<b>Panel</b>	BOE、INNOLUX、LG	BOE、INNOLUX、LG
<b>Chassis Solution (主板方案)</b>	CULTRAVIEW: CV3663BH-Q50	CVTE: TP.SK516S.PC821
<b>FACTORY MODEL (工厂型号)</b>	GSD-5022	GSD-5022
<b>Resolution (分辨率)</b>	1920*1080	1920*1080
<b>Brightness (整机亮度)</b>	250±10%	250±10%
<b>Aspect Ratio (屏比例)</b>	16:9	16:9
<b>ATV SYSTEM (ATV 系统)</b>		
<b>TUNER RECEIVING RANGE (TV 接收频率范围)</b>	48.25MHz ~ 863.25MHz	48.25MHz ~ 863.25MHz
<b>INPUT IMPEDANCE (输入阻抗)</b>	75Ω	75Ω
<b>VIDEO SYSTEM (图像制式)</b>	PAL, SECAM,NTSC	PAL, SECAM,NTSC
<b>SOUND SYSTEM (伴音制式)</b>	BG, DK, I, L/L',MN, NICAM/A2	BG, DK, I, L/L',MN, NICAM/A2
<b>Max Storage Channels最大存台数</b>	99CH	99CH
<b>DTV SYSTEM (DTV 系统)</b>		
<b>Channel bandwidth (频道带宽)</b>	T/T2/C(44MHz ~ 862MHz) S2(950MHz ~ 2150MHz)	VHF (50MHz ~ 230MHz) UHF (474MHz ~ 862MHz)
<b>INPUT IMPEDANCE (输入阻抗)</b>	75Ω	75Ω
<b>Modulation (调制方式)</b>	DVB-T:COFDM QPSK, 16QAM, 64QAM DVB-C:16QAM, 32QAM, 64QAM, 128QAM, 256QAM DVB-S2: QPSK, 8PSK	DVB-T: QPSK,16QAM,64QAM DVB-T2: QPSK,16QAM,64QAM,256QAM DVB-C: 16QAM, 32QAM, 64QAM, 128QAM, 256QAM DVB-S: QPSK QPSK 16APSK 32APSK
<b>VIDEO SYSTEM (图像制式)</b>	MPEG-2 MP@ML, MPEG-2 MP@HL H.265: Supports Main/Main-10 profile,level 4.1,high tier Supports 8-bit/10-bit color depth	MPEG-2,MPEG-4,AVC/H.264,H.265
<b>SOUND SYSTEM (伴音制式)</b>	MPEG-1 Layer 1/2, MPEG-2 Layer 2	MPEG-1,MPEG-2 (layer 1/2),GAAC, Dobby AC3*,Dolby Digital Plus*
<b>Max Storage Channels最大存台数</b>	700CH(DVB-T+DVB-C) 3500CH(DVB-S/S2)	700CH(DVB-T+DVB-C) 无限制 No Limit(DVB-S)
<b>CONNECTORS (连接端口)</b>		
<b>CABLE/ANTENNA INPUT (RF) (天线)</b>	X2	X2
<b>HDMI INPUT (HDMI 输入)</b>	X2(480i, 480p, 576i,576p, 720p, 1080i, 1080p,4Kx2k@30Hz)	X3(480i, 480p, 576i,576p, 720p, 1080i, 1080p,4Kx2k@30Hz)
<b>15-PIN D-SUB INPUT (VGA) (电脑接口输入)</b>	NO	NO
<b>COMPONENT VIDEO INPUT (高清分量/YPBPR)</b>	X1(Mini)YPbPr	X1(Mini)YPbPr
<b>AV INPUT (AV输入)</b>	X1 (PAL/NTSC/SECAM)	X1 (PAL/NTSC/SECAM)
<b>MINI AV OUT (AV输出)</b>	NO	NO
<b>SCART INPUT(SCART输入)</b>	NO	NO
<b>CI (CI卡输入)</b>	X1	X1
<b>PC AUDIO INPUT (PC音频输入)</b>	NO	NO
<b>EARPHONE (耳机输出)</b>	X1	NO
<b>COAXIAL (同轴)</b>	X1	X1
<b>USB INPUT (USB输入)</b>	X2	X2
<b>TF CARD</b>	NO	NO
<b>RJ45 IN</b>	NO	NO
<b>WiFi</b>	NO	NO
<b>PICTURE (图像)</b>		
<b>COMB FILTER (梳状滤波器)</b>	3D	3D
<b>DE-INTERLACE (隔行扫描)</b>	3D	3D
<b>NOISE REDUCTION (降噪)</b>	YES	YES
<b>PICTURE CONTROL(BRIGHTNESS) (图像控制)</b>	Yes	Yes
<b>USER SELECTABLE PICTURE CONTROL(图像模式)</b>	Yes	Yes
<b>SOUND (声音)</b>		
<b>AV STEREO (AV立体声)</b>	Yes	Yes
<b>TONE CONTROL(BASS/TREBLE) (高低音控制)</b>	Yes	Yes
<b>USER SELECTABLE SOUND CONTROL(声音模式)</b>	Yes	Yes
<b>SPEAKER CONSUMPTION(伴音功率)</b>	2*10W speakers	2*10W speakers

<b>SMART TV</b>		
OS	NO	Android11(AOSP)
CPU	NO	MT9256AAATAB
DDR SIZE	NO	1G
eMMC Flash	NO	8G
<b>OTHER FEATHERS (其他)</b>		
OSD LANGUAGES (OSD语言)	English, French, German, Italian, Spanish, Portuguese (optional)	English,Vietnamese,Thai,Arabic,Russian,Malaysia, Turkish,French(optional)
SLEEP TIMER (睡眠定时)	Yes	Yes
AUTO POWER OFF (自动关机)	YES	YES
V-CHIP (N制) (级别锁)	NO	NO
TELETEXT / (图文)	Yes	Yes
NICAM/(丽音/)	Yes	Yes
AC3	Yes	Yes
USB SUPPORT FILE FORMAT (USB支持视频格式)	mpg/avi/ts/mov/mkv.dat/mp4/vob/rm/rmvb	mpg/avi/ts/mov/mkv.dat/mp4/vob/rm/rmvb
USB SUPPORT FILE FORMAT (USB支持音频格式)	ADPCM,LPCM /MP3 /MPEG1 Layer1,2 /AC3 AAC,HE-AAC /WMA7,WMA8,WMA9 STD CDDA(*.wav) /RealAudio8 LBR DD51 /DDPlus /DTS(Need for apply KEY)	ADPCM,LPCM /MP3 /MPEG1 Layer1,2 /AC3 AAC,HE-AAC /WMA7,WMA8,WMA9 STD CDDA(*.wav) /RealAudio8 LBR DD51 /DDPlus /DTS(Need for apply KEY)
USB SUPPORT FILE FORMAT (USB支持图片格式)	JPEG 8192x8192 Progressive JPEG 1024x768 BMP 3000x3000 PNG 3000x3000	JPEG 8192x8192 Progressive JPEG 1024x768 BMP 3000x3000 PNG 3000x3000
<b>POWER (电源)</b>		
POWER SUPPLY (电源输入范围)	AC 100V~240V 50/60 Hz	AC 100V~240V 50/60 Hz
POWER CONSUMPTION (整机电源功率)	≤ 108w	≤ 108w
STAND BY POWER CONSUMPTION(待机功率)	≤ 0.5w	≤ 0.5w
STAND (底座)	Plastic	Plastic
DIMENSION (纸箱尺寸)	1180*145*732mm	1180*145*732mm
NET WEIGHT (净重)	9.55KG	9.55KG
NET WEIGHT (毛重)	12.50KG	12.50KG
40HQ (装柜数量)	627 PCS	627 PCS

