




Specifications

Model	XH-FSCT-T20
Standards	GB 20840 (IEC 61869), GB4208
Window size	20mm
IP rating	IP67
Rated current	0-600 Arms
Max current	600 Arms
Turns	100-3000T
Accuracy class	0.5, 1.0
Equipment maximum voltage	0.66/0.72KV
Rated output	1A,mA,mV,V
Wire lead	3*0.75mm ² sheathed wire
Insulation strength	3KV VAC/min
Insulation impedance	DC500V/100MΩ
Rated frequency	50-400HZ
Working temperature	-40°C~70°C
Storage temperature	-40°C~90°C


Applications

- . Power quality monitoring
- . Power instrument and meter
- . Distributed measurement systems
- . Measurement of current of power supply equipment below 10KV
- . Microcomputer protection


Dimension

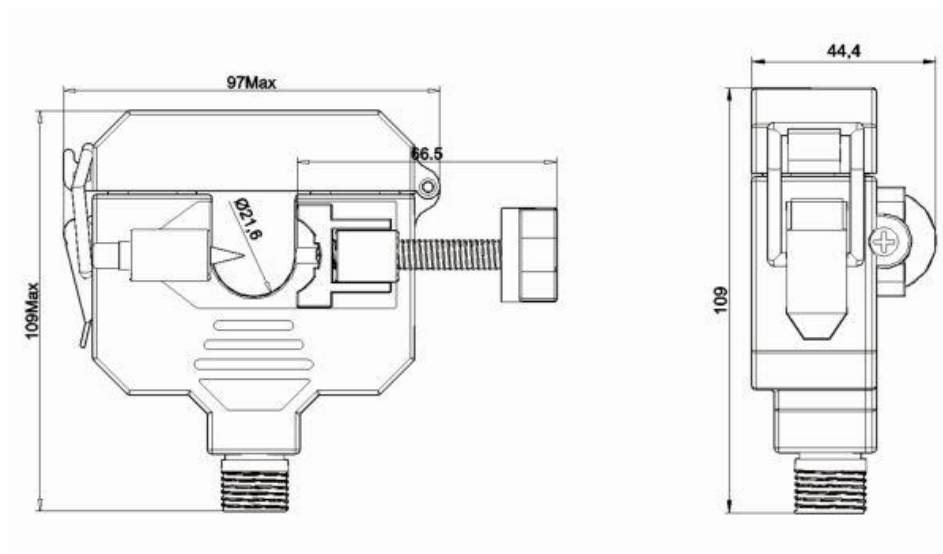

Curve Performance

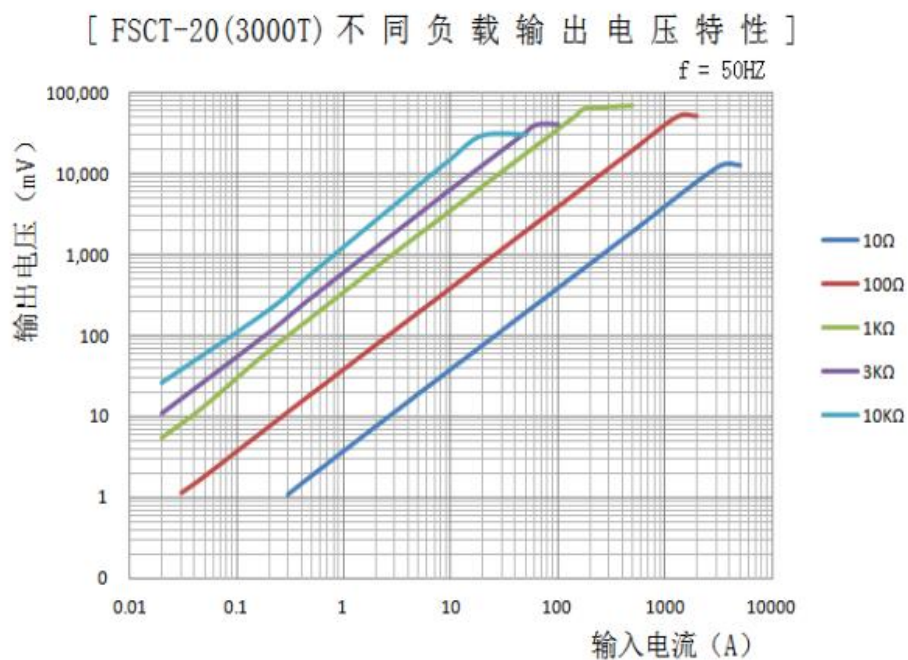

[200A/1A 不同负载性能曲线]

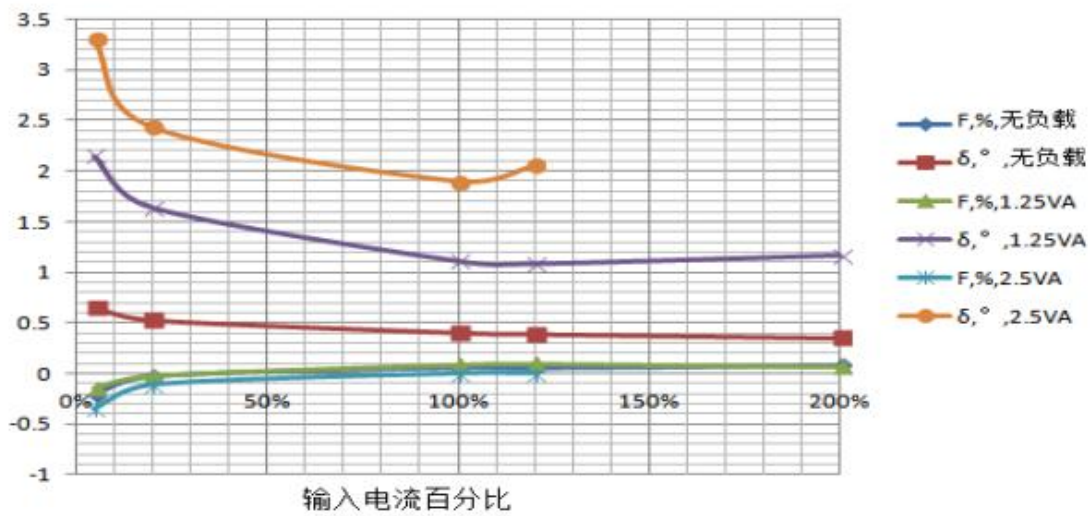

[400A/1A 不同负载性能曲线]

