

HSF RoHS c[®]  us 

SPECIFICATIONS

Rated(额定参数): 300V,20A

Dielectric strength(抗电强度): AC2000V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Screw Torque(扭矩): 0.4Nm (3.5Lb.in)

Wire Range(线径):16~22AWG

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)

Screw (螺丝): M2.5, Steel, Ni plating(钢,镀镍)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information



JL635 - 635 XX X X 1

Pitch
635=6.35PH



No.of pins
2P~20P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

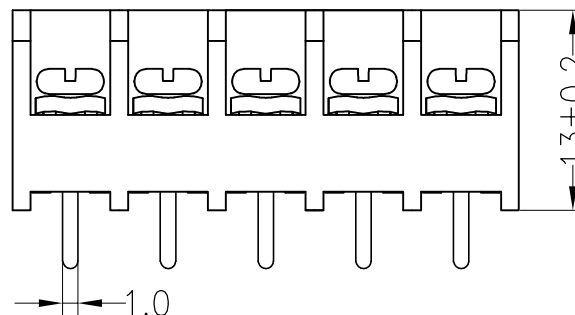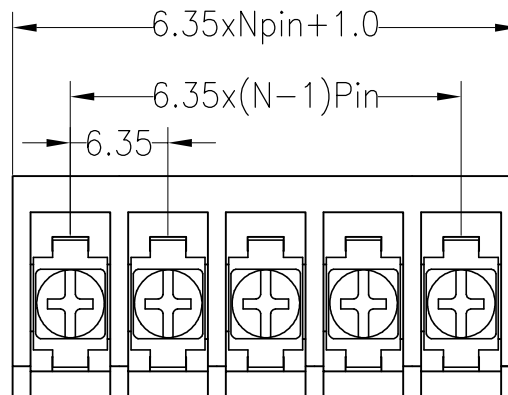

PCB LAYOUT

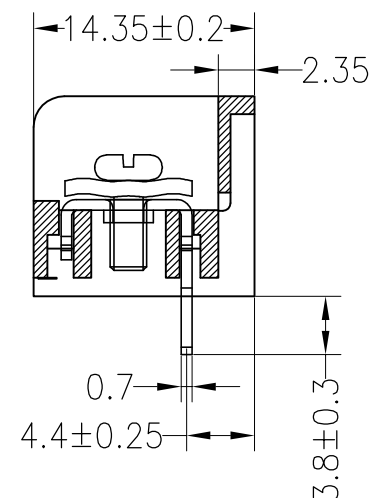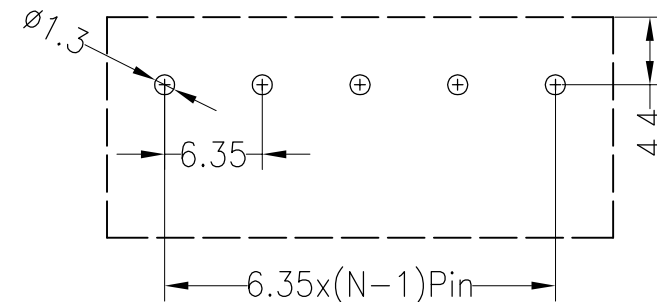

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

yi yusheng

19.03.29

CHECK

APPROVE

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

JL635-635XXXX1

TITLE:

6.35mm Terminal Blocks Female