



Eanovo Technology (Shenzhen) Co., Ltd

A Building, ShangXue Technology Industrial Park, Bantian ,LongGang , Shenzhen, Guangdong, China.

Contact person: lena lee

Mob/WhatsApp: 86-15899766616

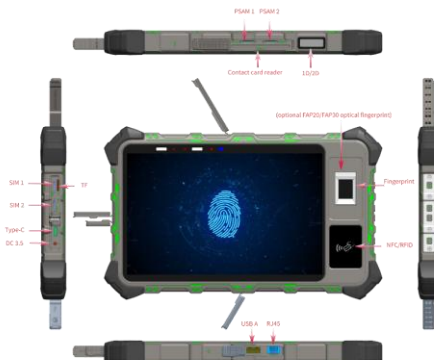
Tel:86-755-23766331 Fax:86-755-23766331

Email:lena@eanovo.com.cn

Skype:lena0621

http://www.eanovo.com.cn

http://www.globalsources.com/eanovo.co

PHOTOS		8" Rugged 4G Tablet PC SPEC		Model NO.: EA-R801
      		SYSTEM SPEC		
		Display	Screen Size: 8 inch Screen Resolution: 800*1280 IPS (FHD 1920*1200 Optional)	
		CPU	MTK6762 64bit Octa-Core 12nm processor 2.0Ghz highest frequency	
		GPU	PowerVR GE8320 GPU	
		RAM	4G, Max support 6G	
		ROM	64GB (32G, 128G optional)	
		Storage expansion	Support up to 512GB SD/TF card	
		OS	Android 13.0 With GMS Certificate	
		Camera	Front 8.0MP + Rear 13.0MP with flash light, one Led light .	
		Speaker and Mic	Support 0.8W dual speaker, dual microphone noise reduction	
Sensor	Gravity sensor, direction sensor, accelerometer			
GPS	Support Beidou, Galileo, GPS, GLONASS			
Battery	Lithium battery 3.85V, 10000mAh(Non-removable)			
Adapter	Input: AC100-240V, 50-60HZ; Output: DC 5V 2A			
Color	Black / White			
NETWORK SPEC				
WIFI	802.11 a/b/g/n/ac (Dual Band Wifi: 2.4G+5G)			
Bluetooth	Bluetooth 5.0			
2G/3G/4G	GSM-----GMS 850/900/1800/1900MHZ			
	WCDMA----Band 1/2/5/8			
	TDD-LTE---Band 38/40/41			
	FDD-LTE---Band 1/3/5/7/20			
LAN	RJ45			
FUNCTION SPEC				
Waterproof	IP67			
Fingerprint Module	FAP30 Optical fingerprint			
	Platen size(WxL) : 21.0 x 27.0mm			
	Sensing Area(WxL) : 20.32 x 25.40mm			
	Image Size : 400x500 pixels			
	Image Resolution : 500 dpi			
	Gray Level : 8 bits, 256 level			
NFC	13.56M ISO/IEC14443 TYPEA/B, ISO/IEC 15693			
2D Head Scanning	Support rear 2D Scanning (Optional)			
FRID	Support 125K/134.2K low frequency module and 840-960Mhz Ultra high module (Optional)			
Face	720P binocular camera for liveness detection(Optional)			
Iris recognition	Support TCL301 Iris recognition module (Optional)			
Contact card reader +Dual PSAM Card	ISO/IEC 7816 card			
INTERFACE SPEC				
USB interface	1 x USB-A Slot			
	1 x Type-C Slot(Full Function)			
Memory Card Slot	1 x TF Card Slot			
SIM Card	2 x Sim Card Slot			
RJ45	1 x RJ45 Slot			
Contact Card Reader	1 x Contact Card Reade Slot			
PSAM Card	2 x PSAM Card Slot			
MIC	1x Type C support Microphone output(the device has only one Type C)			
Reset	1 x Reset Hole Slot			
DC connector	1x3.5mm DC Slot			
Speaker	1* stereo speaker			
Buttons:	1x Up/Down volume button, 1*Power Button,1*Quick button.			
WORKING ENVIRONMENT				
Working temperature	-10℃~+50℃			
Storage temperature	-20℃~+60℃			
Working humidity	10% ~93%RH			
Storage humidity	20% ~93%RH			
Atmospheric pressure	86Kpa~110Kpa			
CERTIFICATIONS				
CERTIFICATIONS	FCC, CE, ROHS standard			
	FIPs 201/PIV 071006, FBI Mobile ID FAP 30. ISO19794-4			
PACKING SPEC				
Dimension	252 x 152 x 21.9 mm			
Packing size	350 x 190 x 41 mm			
Product Weight	Net 0.65kg, Gross 1.1kg			
Carton Dimension	440 x 368 x 400mm / 20PCS			
Carton G.W	22.7kg			
Accessories	Packing box, Charger,DC charging line,Type-c cable			