



REV.	MODIFICATION	ECN No.	NAME	DATE
A/0				

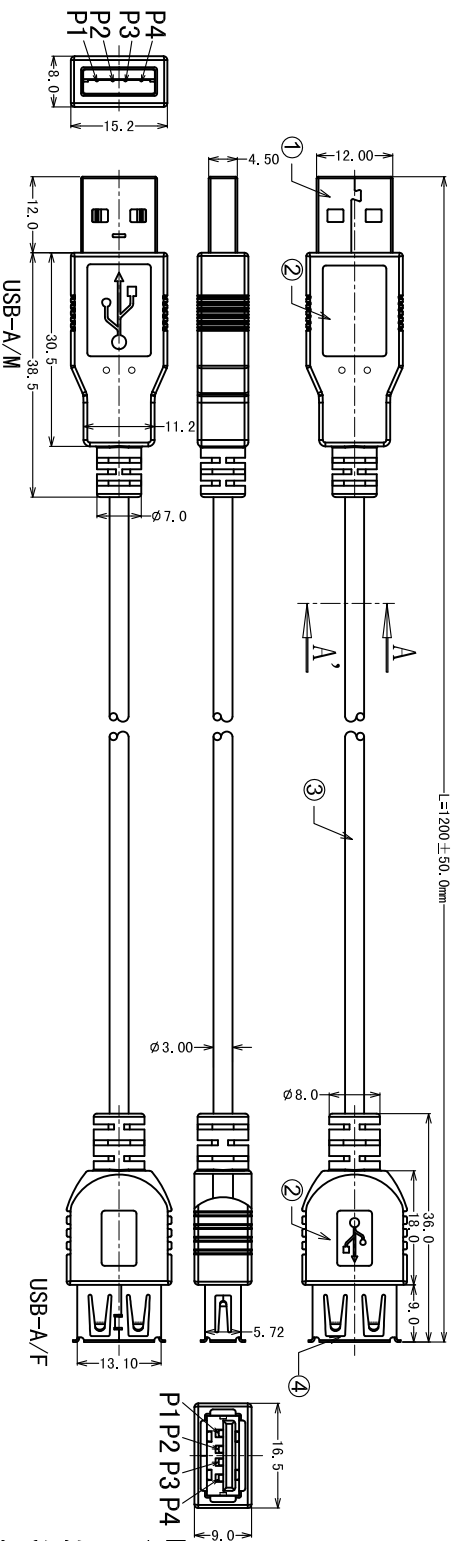

BOM:

4	USB A/F	1	INSULATOR:THERMOPLASTIC UL 94V-0 White CONTACT:Copper Alloy GOLD PLATE Shell:SPCC Nickel Plating	PCS	
3	Cord wire	1200	[(∅0.12*10G Bare copper)*4C red、white、green、black PE Insulation] OD=3.0mm Black Color-coded PVC jacket	mm	
2	Material outside		PVC, UL94 V-0(Black)	g/PCS	
1	USB A/M	1	INSULATOR:THERMOPLASTIC UL 94V-0 White CONTACT:Copper Alloy GOLD PLATE Shell:SPCC Nickel Plating	PCS	
Item	PART NAME	QT'Y	Specifications	Unit	NOTE

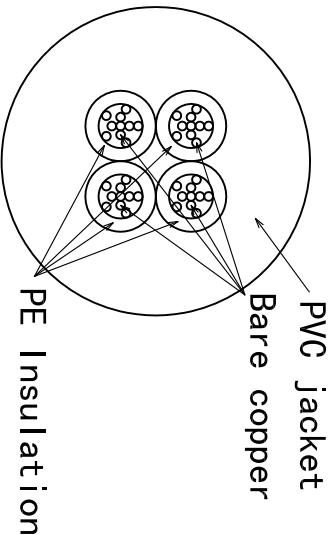

SECTION“A-A”

接线表PIN ASSIGNMENT

USB-A/M	USB-A/F
P1 红色 red	P1
P2 白色 white	P2
P3 绿色 green	P3
P4 黑色 black	P4

JIANHAN				东莞市江涵电子有限公司			
DONG GUAN JIANG HAN ELECTRONICS CO., LTD				REV. : A/0			
TEL:0769-87815809 FAX:0769-82065390				UNIT : mm		SCALE: FIT	
ADD: 广东省东莞市塘厦镇石潭埔青云岭工业区骏鹏路6号				SHEET: 1 OF 1			
产品名称: PRODUCT NAME		USB AM TO USB AF CABLE L=1.2M		GENERAL TOLERANCES			
材 质 Material		料 号 Part No.		核 准 Approved by			
		6282093119		审 核 Checked by			
表 面 Surface		模 号 Mold No.		制 图 Drawn by		郑德品	
THIRD ANGLE							