


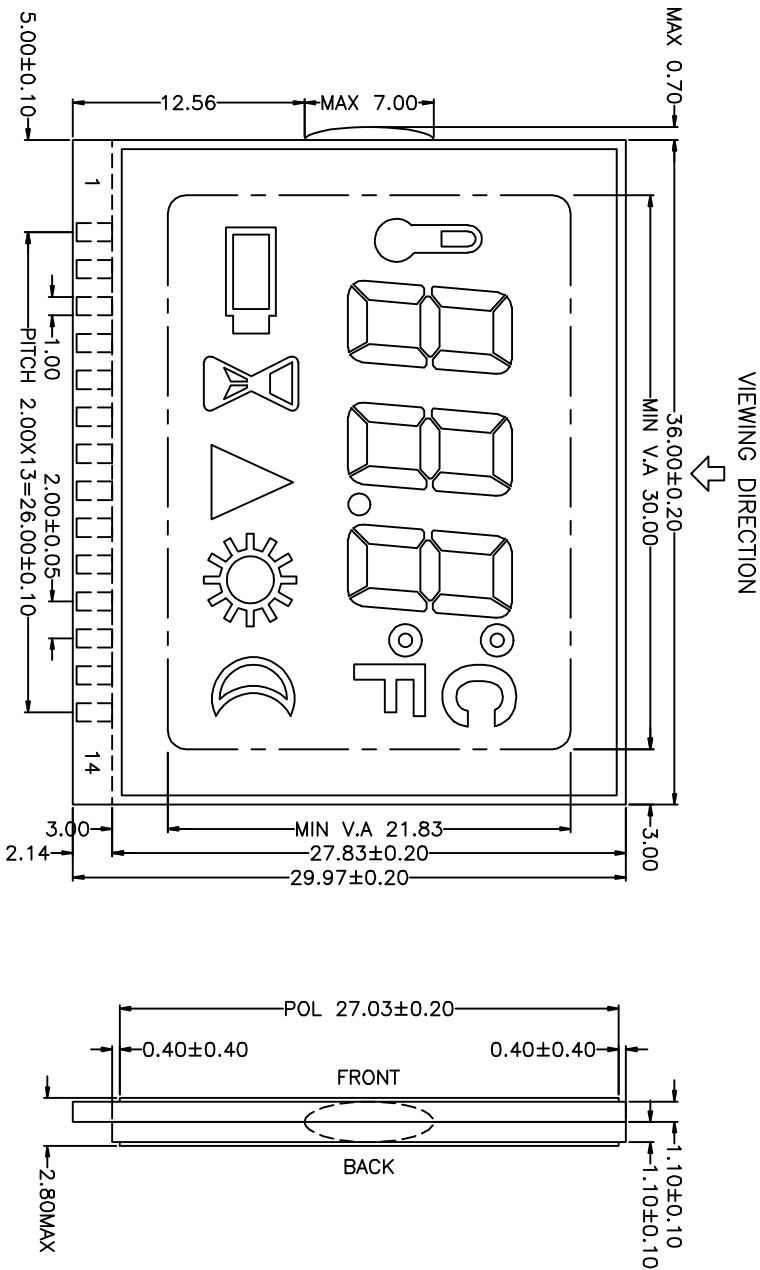

1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. VIEWING ANGLE: 12 0' CLOCK.
3. VIEWING MODE: POSITIVE, REFLECTIVE
4. DISPLAY TYPE : TN
5. CONNECTION: ZEBRA
6. FLUID SPECIFICATION:
- DRIVING VOLTAGE: **4.6 V**
- MULTIPLY LEVEL: 1/4DUTY, 1/3BIAS
- OPERATING TEMP. : 0°C -- +50°C
- STORAGE TEMP. : -10°C -- +60°C
7. COMPLIANT ROHS REQUEST

客户确认:		内 容	日 期	SPIND SCREEN TECHNIQUE(H.K.) LIMITED				
序号	修 改			绘图编号: M120021A	客户编号:	单位: mm	版号: 01	
				绘图: TAN	审核: TAN	日期: 2012.03.02	页数: 1/4	