
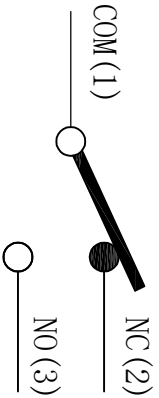
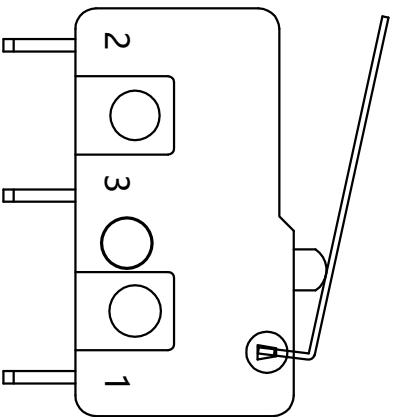


Rating	5 A 125/250V/AC	Mechanical Life	500,00 cycles
Contact Resistance	500mΩ Max	Electrical Life	UL10,000 cycles TUV50,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	40 ±20gf max

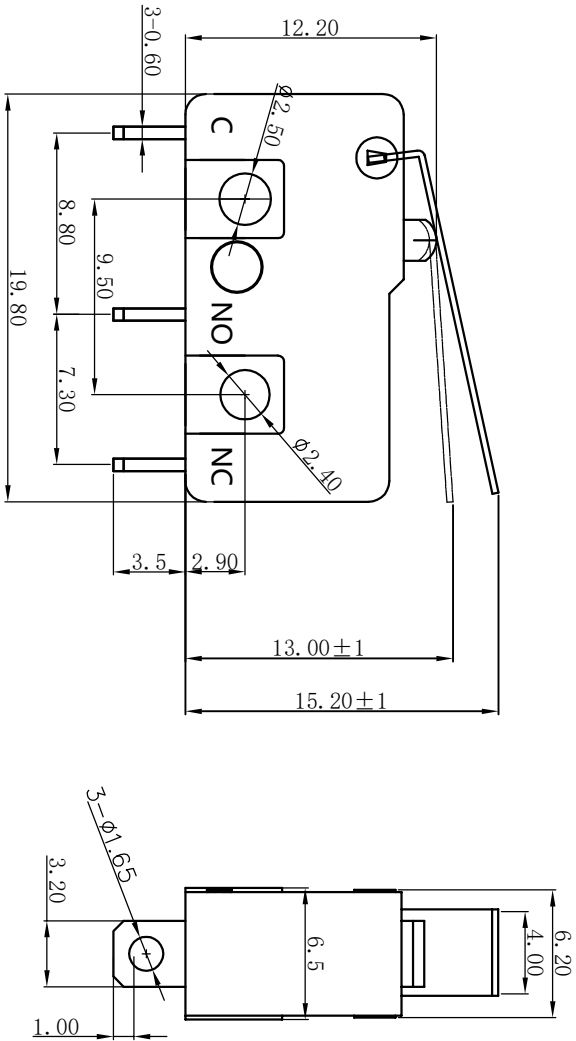

电路图

序号	零件名称	数量	材质	备注
10	压柄	1	SUS301	
9	触点	3	复合银点	
8	C弹片	1	C17200	
7	弹片	1	C5210/银点	
6	NO端子	1	C2680	
5	NC端子	1	C2680	
4	COM端子	1	C2680	
3	按钮	1	PBT	UL94V-0
2	下盖	1	PBT	UL94V-0
1	上盖	1	PBT	UL94V-0

制图	审核	比例	名称
DRAWING	DESIGN	SCALE	TITLE
设计	审核	4:1	

版本	日期	变更内容	修改	核准	一般公差	角度	纸张	角法	工程圖
ECN 编号	DATE	DEFINITION	DRAW	APPROVE	TOLERANCE	ANGLES	P/N NO.	P R O J.	ENG DRAW
REV									
B					±0.20	mm			
					±0.15	UNIT			
					±0.10	mm			
					±0.05	mm			

KW2-Y-L16-Y