

RING FILTER INDUCTOR SERIES

Product parameters


- Frequency range 50KHz-500KHz
- Compact design, light weight, high rated current & high inductance are optional for different forms of installation
- Fewer coils and better frequency response

Standards


- Compliant with RoHS REACH
- Plastic materials meet UL94V-0 requirements



Specifications

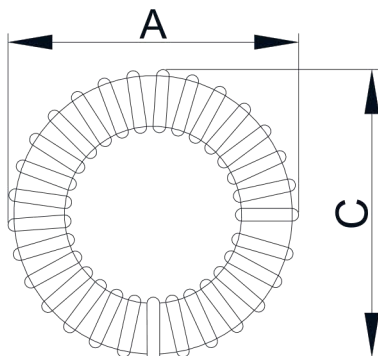


(FRONT VIEW)

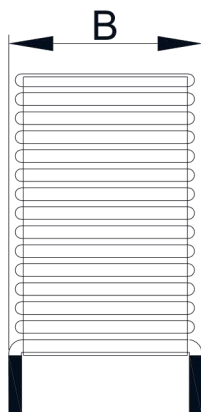

(SIDE VIEW)

Dimensions(mm)	
(L)	Customizable
(Amps)	Customizable
A(mm)	9-120
B(mm)	5-50
C(mm)	9-120

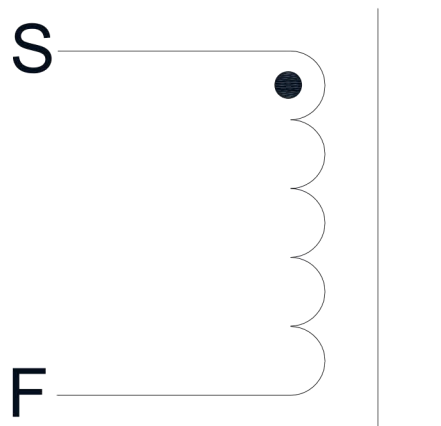

*Specifications and parameters can be customized according to customer design requirements.