

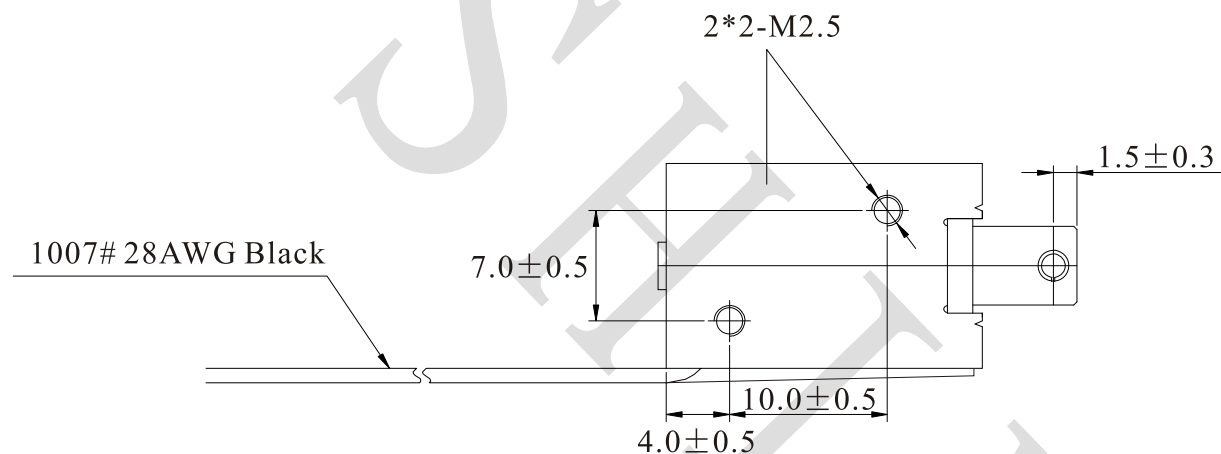


Rev.	Description	Date
A0	New release	2022.12.14

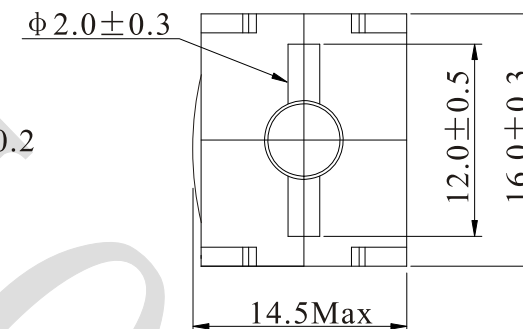

Rated voltage: 9Vdc $\pm$ 10%
 DCR: 2.5 Ω $\pm$ 10%
 Rated current: 3.6A Ref
 Hi-Pot: 500Vac, 0.5mA, 1min
 Insulation resistance: 500Vdc, 50M Ω Min
 Insulation class: B
 Life: More than 500,000 times
 Ambient temperature: -5°C to +45°C
 Relative humidity: 20%~80%

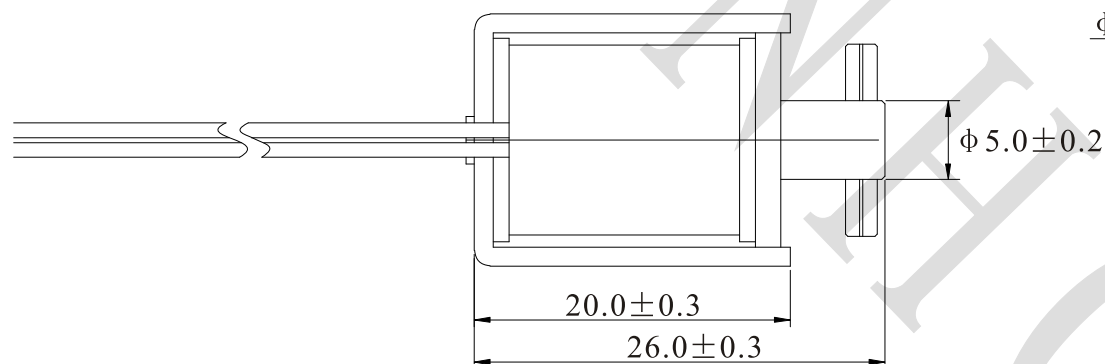

NAME:	Solenoid valve		
CUSTOMER P/N:	1700A1030	DATE:	2022-12-14
SHINHOM P/N:	SCM2613L09	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
 SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong
 to SHINHOM & is not allowed to be
 duplicated without authorization