


SK-643383AG RF2.4GHz Auto-link Optical kit

SPECIFICATIONS

Part 1.0: General Features

- Mimi size slim wireless keyboard
- Totally Wireless freedom
- 2.4GHz FSK Autolink technology
- 34 two way R F channels
- Operation distance of 6~10 meters for mouse and keyboard
- 800~1200~1600 DPI optical precision switchable
- 3 level power saving mode
- Auto power save model
- Nano receiver for this combo

Part 2.0: Physical characteristics

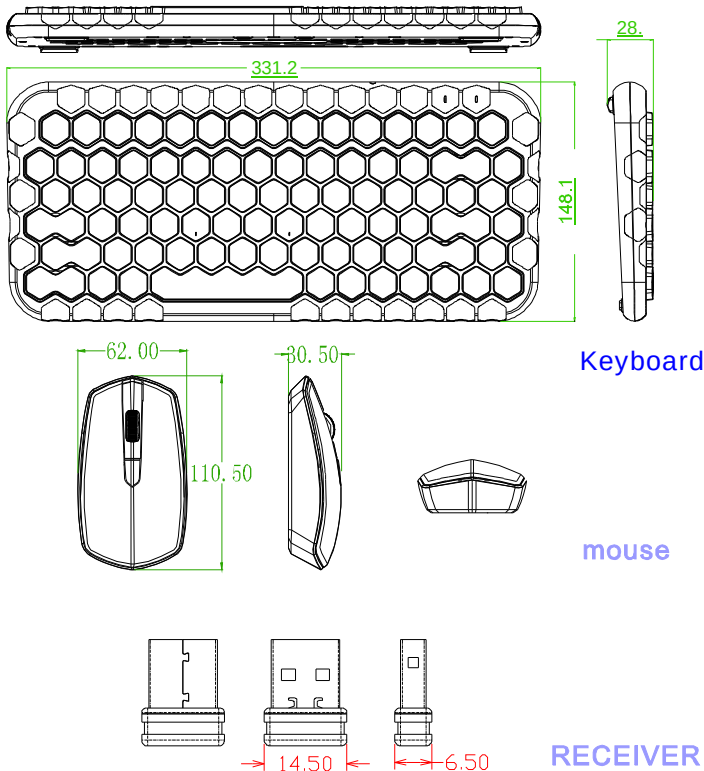

Mechanical Performance

Operating force of mouse buttons	70± 15 gf
Operating force of keyboard keycaps	60 ± 15gf
Operating force of wheel scrolling	20± 10 gf

Buttons


Keyboard : 83 standard keys,
Mouse : 4 buttons with scroll wheel

Weight:

Keyboard: 495 ± 10 g (battery included)
Mouse: 78 ± 5g
Receiver: 2 ± 1 g

Multimedia Hotkeys functions:

FN+ECS=Media Player	FN+F9=Email
FN+F1=Previous Track	FN+F10=My Calculator
FN+F2=Play/Pause	FN+F11=My favourite
FN+F3=Next Track	FN+F12=My computer
FN+F4=Mute	FN+Insert=Scroll Lock
FN+F5=Volume Down	FN+Delete=Pause/B
FN+F6=Volume Up	FN+Shift-R=PrtScr
FN+F7=Web Home	FN+Ctrl-R=APP
FN+F8=Search	

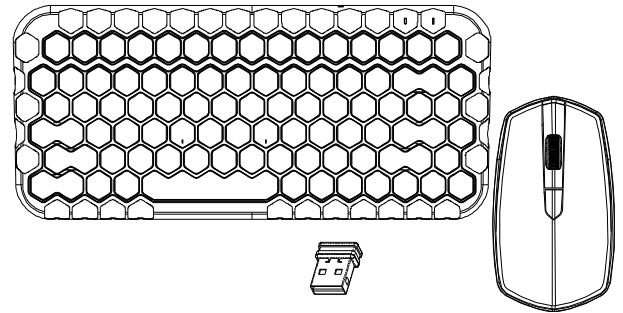

SK-643383AG

Part 3.0: Electrical Specification

Interface : USB 1.1

Sensor report rate on mouse: 3000 times per second

Operation angle: 360 degrees

Operation distance: 6~10 meter for keyboard and mouse

Receiver power requirement: 5V DC from USB port

R F frequency: 2.4 Ghz (2.408~2.474 Ghz)

R F modulation : F S K Auto-Link

Hopping type : FHSS (frequency hopping spread spectrum)

R F channel : 34 channels

R F bandwidth : 2.0mHz

Speed of transmit: 1M bps

R F output power : 0dBm

Receiver of sensitive: -85dBm

Resolutions: 800~1200~1600DPI

Sensor Tracking Speed: 30+lines/second

Battery

Battery type: two AAA alkaline for keyboard
one AA alkaline for mouse

Battery consumption:

keyboard: 3.0V

Mouse:

Operating Mode: ≤ 12 mA (working)

Sleep Mode1: ≤ 1.0mA (after 5 second non-active)

Sleep Mode2: ≤ 0.58mA (after 59 second non-active)

Sleep Mode3: ≤ 0.1mA (after 8 minutes around non-active and LED turn off)

Keyboard: Operating Mode: ≤ 8 mA

Sleep Mode 1: ≤ 2 mA (no typing)

Part 4.0: Reliability

Keyboard Button Switch Activation: 8,000,000 cycle

Operating temperature: -5 ~ 40 degrees celsius

Operating humidity: 20% - 90%

Part 5.0 System Requirement

Windows 2000, Windows xp, Windows ME.

Windows VISTA, Windows 7/8/10

REV: 1.00