

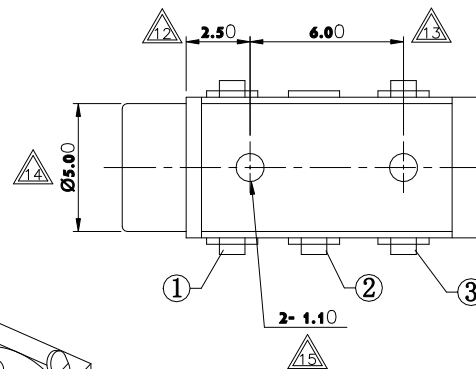


F
E
D
C
B
A


12345678

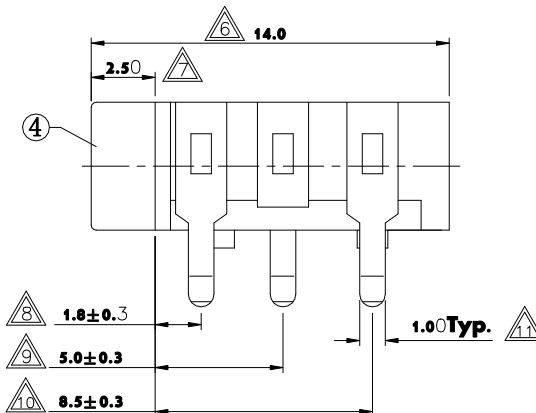


Level-1 Controlled Substances are banned

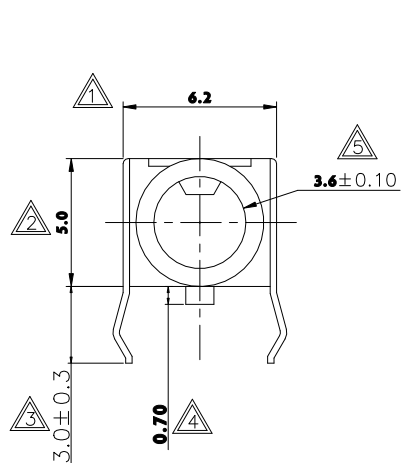



P. C. B LAYOUT
TOP VIEW

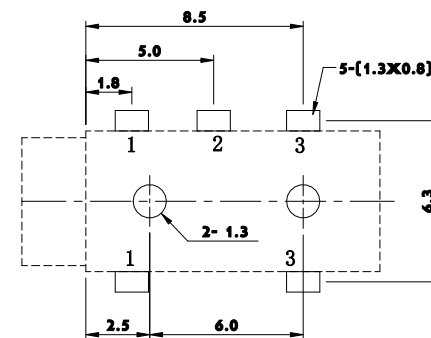

SCHEMATIC



SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: $\leq 0.03\Omega$;
3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.
7.Marked $\triangle$ are important dimensions.

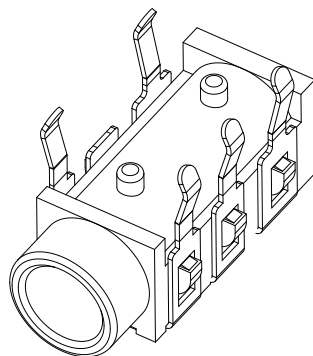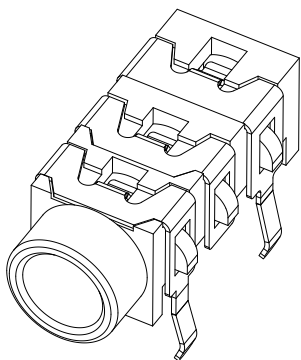

4	HOUSING	1	PBT	—	—
3	CONTACT FOOT	1	SUS301	—	Sn-Plating
2	CONTACT FOOT	1	SUS301	—	Sn-Plating
1	CONTACT FOOT	1	SUS301	—	Sn-Plating

NO.		DESCRIPTION		QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED						盛 聰 电 子 有 限 公 司 SHENG CONG ELECTRONIC CO.,LTD	
General		Angle		CUSTOMER COPY		TITLE:	PHONE JACK
X ± 0.50		X °± 3°					
XX ± 0.30		XX °± 2°					
XXX ± 0.20		XXX °± 1°					
XXXX ± 0.10				PART NO.	PJ-D3013		
PROJ: 		SCALE: 3:1			UNIT:mm	SIZE: A4	SHEET: 1 OF 1



盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

						DESIGN	Steven	12'/06/13	
						CHECK	Jason	12'/06/13	
						APPRO	Max.hu	12'/06/13	
ECN(DCN) NOREV	DATE	NEW DESCRIPTION			CHANGE	APPRO	Max.hu	12'/06/13	

Original: Design: Steven Check: Jason Appro: Max Date: 12'/06/13