

SPECIFICATIONS

Rated(额定参数): 300V, 10A

Dielectric strength(抗电强度): AC2000V/1 Minute

Insulation Resistance(绝缘电阻):1000M Ω Min


Contact Resistance(接触电阻):20mΩ Max

Screw Torque(扭矩): 0.4Nm (3.5lb.in)

Wire Range(线径):14~26AWG

Strip length(剥线长度): 7-8mm

Temp. range(操作温度): $-40^{\circ}\text{C} \sim +1$

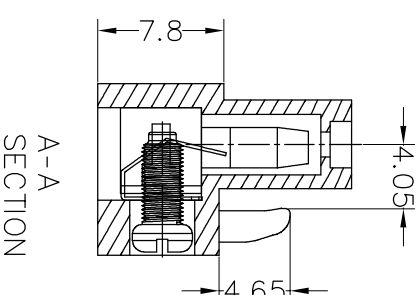

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Phosphor Bronze, Tin plating(磷銅鍍銀)

Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)

Screw (螺丝): M2.5, Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6	OVER 10	OVER 30	OVER 60	OVER 100	OVER 150
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±1.00

Ordering Information

JL 508 - 508 XX X X 1



			OPERATION		DRAW	yiyusheng	19.05.05	SCALE	FIT	jilin ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
			X X	±0.30				UNIT	mm		
			X.XX	±0.20				SIZE	A4		
			X.XXX	±0.10				SHEET	1/1		
A0	2019.05.05	NEW DRAWING	Angle	±3°	APPROVE					PART NO.	5.08mm Pitch Female Pluggable Terminal Blocks
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE				PROJ.		TITLE:	
			DIM	TOL							