





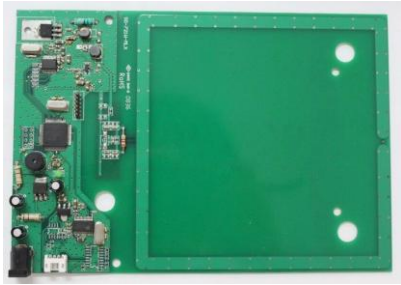

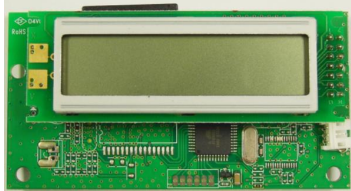


Datasheet

Product P/N	RMD-LE23-R23	Product	125 kHz LCD Number display Module
Show Mode: Display HEX, Wiegand26, Wiegand32			
1. Reader diagram			
2. Reader dimension L85 * W50 * H20 (mm) Internal Antenna			
3. Specification			
Operating Frequency	125 kHz		
Interface	RS-232		
Baud Rate	9600 bps		
Power Requirement	DC 4.75~5.5V		
Electric Current	40 mA (DC5V)		
Read Function	Read only		
Card Types	EM 125kHz		
Reading Distance	Up to 100 (mm)		
Indicators	R LED / G LED, Beep and LCD display		
Operation Temperature	0°C ~ + 50°C		
Storage Temperature	-10°C ~ + 60°C		
Humidity	10% ~ 90%		
RoHS	PASS		
CE & FCC			
Weight			
Packing			

- Specification is subject to change without notice.
- We also design special reader module according to customer's request.

No.	P/N No.	Product Picture	Description	Dimensions	Notes
1	RMD-PC23-S60		13.56 MHz ICode2 / RS485	L114 x W33 x H14 (mm)	Internal Antenna
2	RMD-PC23-R60		13.56 MHz ICode2 / RS232		
3	RMD-PC23-U60		13.56 MHz ICode2 / USB		
4	RMD-PF23-S60		13.56 MHz Mifare / RS485		
5	RMD-PF23-R60		13.56 MHz Mifare / RS232		
6	RMD-PF23-U60		13.56 MHz Mifare / USB		
7	RMD-PC23-U61		13.56 MHz ICode2 / USB	L100 x W67 x H18 (mm)	Internal Antenna
8	RMD-PC23-R61		13.56 MHz ICode2 / RS232		
9	RMD-PF23-U61		13.56 MHz Mifare / USB		
10	RMD-PF23-R61		13.56 MHz Mifare / RS232		
11	RMD-PC23-U63		13.56 MHz Code2 / USB	L50 x W50 x H12 (mm)	Customized antenna design is available
12	RMD-PC23-R63		13.56 MHz ICode2 / RS232		
13	RMD-PF23-U63		13.56 MHz Mifare / USB		
14	RMD-PF23-R63		13.56 MHz Mifare / RS232		
15	RMD-RC23-U63		13.56 MHz Mifare & ICode2 USB	L58 x W42 x H12 (mm)	Customized antenna design is available
16	RMD-RC23-R63		13.56 MHz Mifare & ICode2 RS232		

No.	P/N No.	Product Picture	Description	Dimensions	Notes
17	RMD-PF23-U64		13.56 MHz Mifare / USB	L40 x W22 x H13 (mm)	Antenna Optional
18	RMD-PC23-U64		13.56 MHz ICODE2 / USB		
19	RMD-PC23-R71		13.56 MHz Mid-Range Module ICODE2 / RS232	L188 x W130 x H17 (mm)	Internal Antenna
20	RMD-PC23-U71		13.56 MHz Mid-Range Module ICODE2 / USB		
21	RMD-LD23-R23		Dual band 125 KHz (EM) 13.56 MHz (ISO 14443) Display HEX RS232	L85 x W50 x H20 (mm)	DC5V~12V Read only Internal Antenna
22	RMD-XQ23-R19		Dual band 125 KHz (EM) 13.56 MHz (ISO 15693) Display HEX RS232		
23	RMD-LE23-R23		RS232 125 KHz (EM/TK) Display HEX , Wiegand26 , Wiegand32	L85 x W50 x H19 (mm)	DC9V Read only Internal Antenna