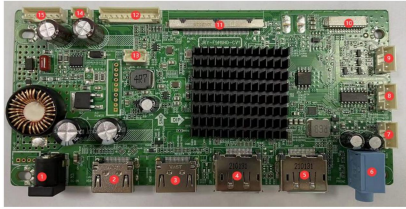


Size		27" FHD 200hz CURVED
Model Name		G270C1
ID	Picture	
LCD Panel	Display size	27" Aspect 16:9 LED-Backlight
	Active Area	597.888(H)×336.312(V)
	LCD TYPE	VA ,Normally Black
	Brightness(Typical)	250cd/m2 (Typical)
	Frame	3-Side Frameless
	Curvature	R1500
	Contrast(Typical)	3000:1 (Typical)
	Pixel Arrangement	R.G.B. Vertical Stripe.
	Pixel Pitch	0.2331 (H) × 0.2331(V)
	Resolution (H x V)	1920*1080
	Aspect Ratio	Aspect 16:9
	Response Time(Typical)	10ms (GTG)
	View Angles LR,UD(CR>10)	H 178/ V 178
PC Input Range	Panel Surface	Anti-Glare, 3H, Haze 25%
	Display Colors	16.7M(8bit) True 8bit
	Vertical Freq.	180Hz ,overclock to 200HZ
	Max. display frequency (Resolution H*V/Fv)	1920*1080 @200HZ
	MAINBOARD	JRYBA05B-BB12KAWA
	solution	MT9800BTFUAG
	I/O JCAK PICTURE	
HUB extend	HUB extend	NO
	Input 5	NO
	Input 5	NO
Interface	Input 1	HDMI2.0x2 (FHD 200hz)
	Input 2	DP1.4 x 2(FHD 200hz)
	OUT	ear phone
	Input 4	DC IN 12V
Output Terminal	Earphone	1
	Speaker(Typic)	8Ω, 3WX2
Power	Consumption(Typical)	On: < 36W (MONITOR ONLY) Standby<=0.5W, Off<=0.5W
	Power Range	DC12-3A
	REMOTE	NO
	Power Mode Indicator Light	Power on : Blue (LED) Power saving : Red(LED)
LED	Dynamic colored light	Optional
Operating Condition	Temperature	0℃ ~ 40℃
	Humidity	20% ~ 85%, non-condensing
Physical	Dimension (W*D*H)	NA
	Packing Dimension (W*D*H)	NA
	Net Weight	NA
	Gross Weight	NA
	Tilt	-5 ~ 10°
	High Adjustable Arm	YES
	Swivel	YES
	Pivot	YES
	Kensington Lock	YES
Controls	VESA Mounting	Yes (100*100mm)
	Front Control	Menu, Bri (-), Vol(+) Auto/Enter, Power
	On Screen Display	Standard OSD format
	Color	WARM,COOL,User Mode
Accessory	Preset Mode	NA
	Power Cable	YES
	Adapter	DC12-3A
	VGA Cable	NA
	Audio Cable	NA
	DVI Cable	NA
	HDMI-DVI Cable	NA
	HDMI-HDMI Cable	YES(1.5M)
	DP Cable	YES(1.5M)
	Type-C Cable	NA
	User Manual(Paper)	NA
	Quick Start Guide(Paper)	NA