






ABIDE BY WEEE & ROHS

■ Specification :



1. Insulation Resistance: 100M Ω Min. (DC250V)
2. Withstand Voltage: AC500V (50-60Hz) for 1 minute
3. Operation Force: 65 $\pm$ 15gf
4. Releasing Force: 25gf Min.
5. Pretravel: 0.30 $\pm$ 0.2 mm
6. Movement Differential: 0.12mm Max.
7. Mechanical Life: 80,000,000 Cycles Min.

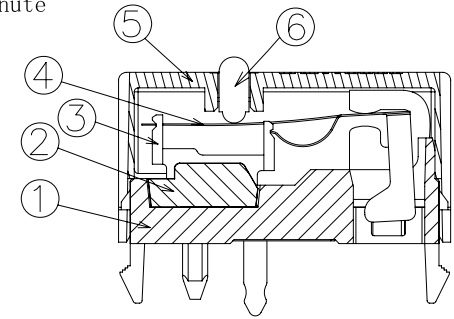



SWITCH FUNCTION

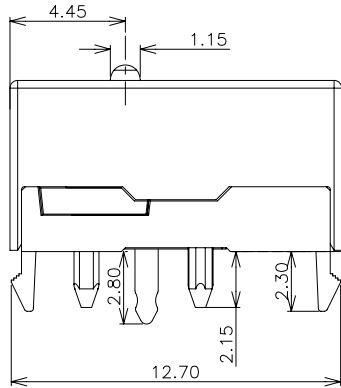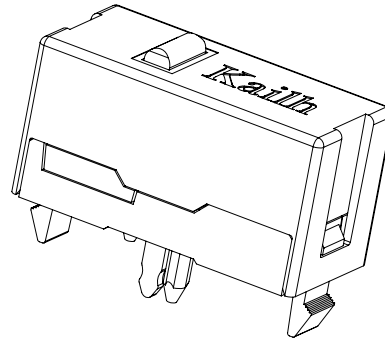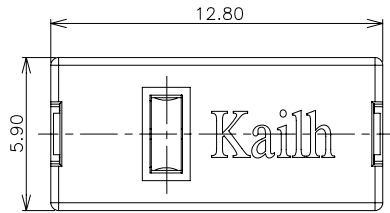

Mounting Surface

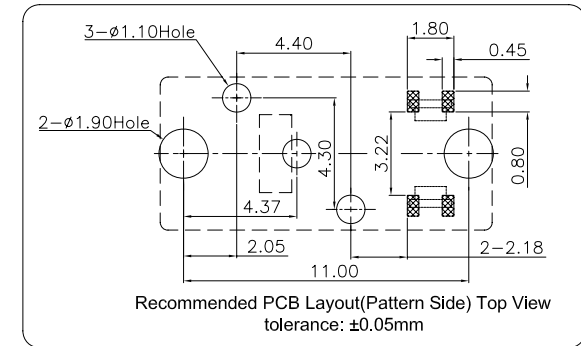

Recommended PCB Layout(Pattern Side) Top View
tolerance: $\pm$ 0.05mm

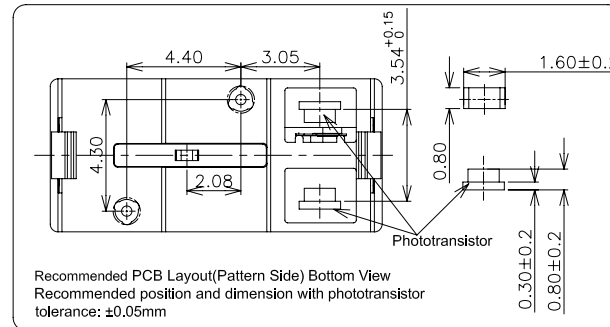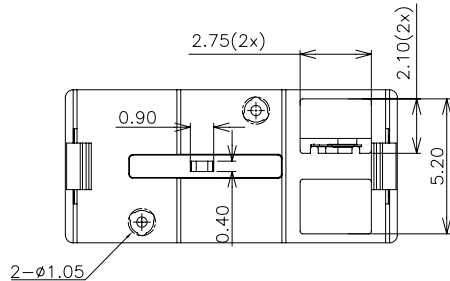

Recommended PCB Layout(Pattern Side) Bottom View
Recommended position and dimension with phototransistor
tolerance: $\pm$ 0.05mm

⑥	Keystoke	—	1	POM	Green	—
⑤	Cover	—	1	PBT	Black	—
④	Shrapnel	—	1	Copper Alloy	Natural	—
③	Terminal	—	1	Brass	Tinplating	—
②	Base	—	1	PBT	Black	—
①	Baseboard	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO., LTD			
DRAWN	Xiao Yijiang	2022.01.10	TITLE:	Micro Switch		
CHECKED			PART NO:	CMI1266G01D06		
APPROVALS			UNIT: mm	SCALE: 1:1	PROJ: 	
TOLERANCES ARE	30<L 10<L≤30 5<L≤10 L≤5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°	DRAWING NO.	SHEET: 10F1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A1	2022.01.10	NEW	Xiao Yijiang		