


Ordering Information

HC-PGP	Type	Length A	DIA	SR	Plating		Packing
					Plunger	Barrel	
P=PIN	SMT= A Dip= B Solder =C Double Header=D Bending= E Other= F Lathe= G	XXX	XXX	XXX	针轴膜厚 G1=3U" G2=5U" G3=10 U" G4=15 U" G5=20 U" G6=25 U" G7=30 U"	针管膜厚 G1=3U" G2=5U" G3=10 U G4=15 U G5=20 U G6=25 U G7=30 U	1= Bag T=Tube R=Reel A=Box

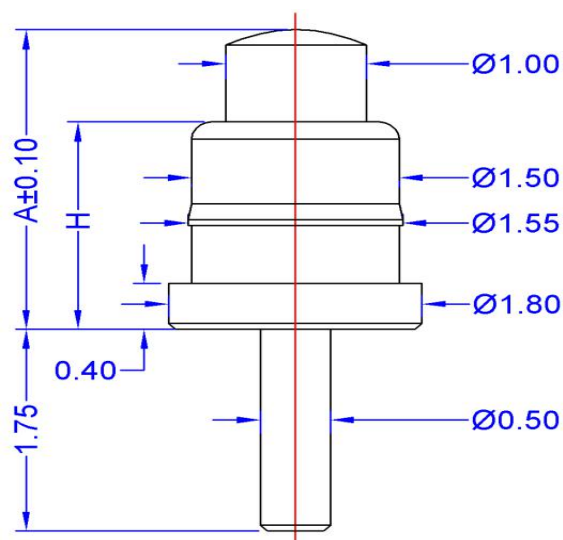

材质(Material)

针轴 (Plunger) : Brass 3604

针管 (Barrel) : Brass 3604

弹簧 (Spring) : SUS 304

环境性能(Environment Performance)

工作温度范围(Operating Temp): -40°C~ +105°C

焊锡耐热性(Resistance to Solder heat) :260°C±5° 20s±2s

盐雾测试(Salt spray) :48H

额定电压 (Votage) : 3-36V



Series	P/N	Length A(mm)	H (mm)	Stroke (mm)	Full Stroke (mm)	Force (αF)	Resistance (mΩ)	Current (A)	Votage (V)
17	HC-PGP-B-070-1.8-2-XX-XX-X	7.0	5.5	1.0	1.4	70±20	30	3	3-36
18	HC-PGP-B-075-1.8-3-XX-XX-X	7.5	5.5	1.0	1.4	70±20	30	3	3-36
19	HC-PGP-B-080-1.8-4-XX-XX-X	8.0	5.5	1.0	1.4	70±20	30	3	3-36
20	HC-PGP-B-090-1.8-1-XX-XX-X	9.0	7.5	1.0	1.4	70±20	30	3	3-36
21	HC-PGP-B-095-1.8-2-XX-XX-X	9.5	7.5	1.0	1.4	70±20	30	3	3-36
22	HC-PGP-B-100-1.8-3-XX-XX-X	10.0	7.5	1.0	1.4	70±20	30	3	3-36
23	HC-PGP-B-105-1.8-4-XX-XX-X	10.5	7.5	1.0	1.4	70±20	30	3	3-36
24	HC-PGP-B-110-1.8-5-XX-XX-X	11.0	7.5	1.0	1.4	70±20	30	3	3-36
25	HC-PGP-B-120-1.8-1-XX-XX-X	12.0	10.5	1.0	1.4	70±20	30	3	3-36
26	HC-PGP-B-130-1.8-2-XX-XX-X	13.0	10.5	1.0	1.4	70±20	30	3	3-36
27	HC-PGP-B-140-1.8-3-XX-XX-X	14.0	10.5	1.0	1.4	70±20	30	3	3-36
28	HC-PGP-B-150-1.8-3-XX-XX-X	15.0	12.5	1.0	1.4	70±20	30	3	3-36