


M16 A code male right angle to female straight molded cable, unshielded/M16, A型公头弯头对母头直头成型式连接线, 不带屏蔽

Scale drawing/尺寸图




Product photo/产品图



Part number/产品料号

Pins/针数	Code/型	Part number("X" is length millimetre mm)/产品料号("X"表示长度, 单位毫米mm)	
		PVC jacket/PVC外被	PUR jacket/PUR外被
2pins/2针	A code/A型	16L00190	16L00191
3pins/3针	A code/A型	16L00210	16L00211
4pins/4针	A code/A型	16L00230	16L00231
5pins/5针	A code/A型	16L00250	16L00251
6pins/6针	A code/A型	16L00290	16L00291
7pins/7针	A code/A型	16L00310	16L00311
8pins/8针	A code/A型	16L00330	16L00331
12pins/12针	A code/A型	16L00350	16L00351
16pins/16针	A code/A型		
19pins/19针	A code/A型	16L00390	16L00391
24pins/24针	A code/A型	16L00410	16L00411
5pins/5针	B code/B型	1600693	2E+06
7pins/7针	B code/B型	1600713	2E+06
14pins/14针	B code/B型	16L00370	16L00371

Pin assignment front view/针位分布前视图

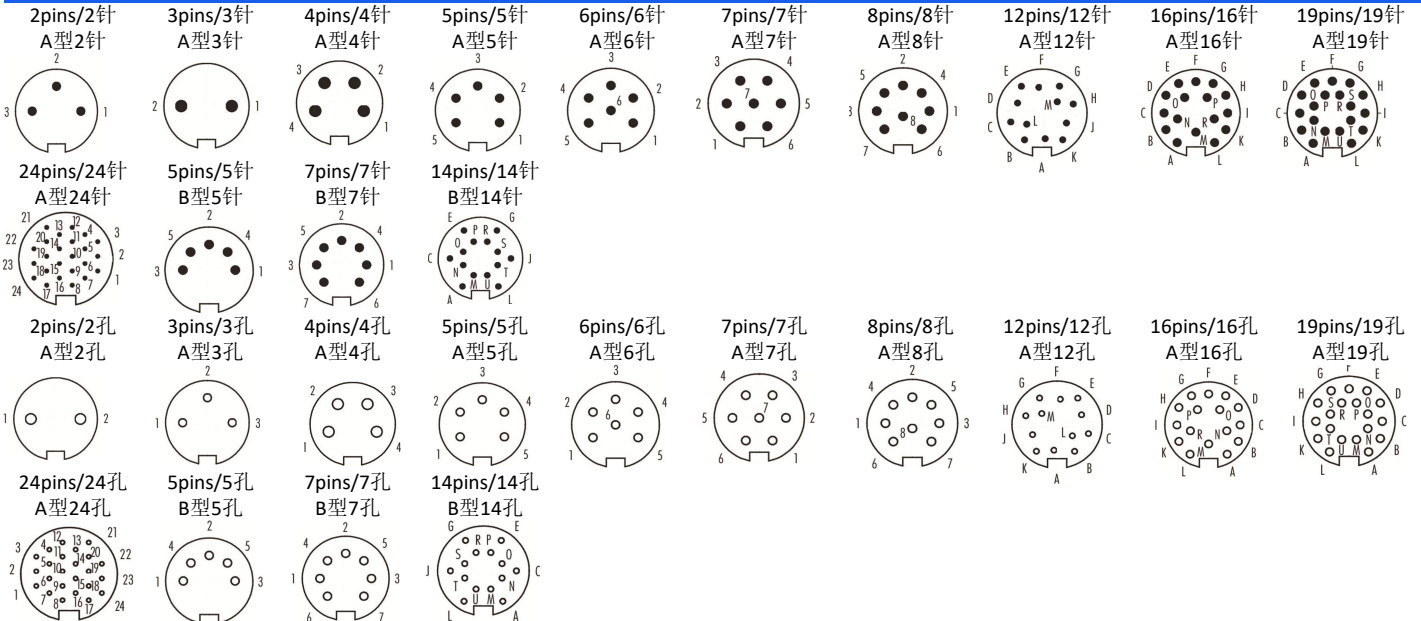

General data/常规数据

Pin Numbers/针数	2pins	3pins	4pins	5pins	6pins	7pins	8pins	12pins	16pins	19pins	24pins
Rated voltage/额定电压	150V			250V	150V	125V	32V	60V			
Rated current(40°C)/额定电流	7.0A		6.0A			5.0A		3.0A	4.0A	3.0A	1.0A
Standards/标准	DIN EN 61076-2-106										
Termination/焊接方式	Solder/焊接										
Connector locking system	Screw/螺锁										
Degree of protection/防护等级	IP67										
Mechanical operation/插拔次数	>100 mating cycles/大于100次										
Ambient temperature (operation)/操作温度	-25°C~+85°C										
Insulation resistance/绝缘电阻	≥10 ¹⁰ Ω										
Connector body/胶芯	TPU										
Pin/端子	Brass with gold plated/黄铜镀金										
Screw/螺丝	Brass with nickel plated/黄铜镀镍										
Customs tariff number/海关编码	8538900000										
Environmental compliance/环境符合标准	RoHS, Reach										