




1 2 3 4 5 6 7 8

REV	DESCRIPTION	DRAWIN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE	YC.CHEN 23/04/21		

A





NOTES :

- 1.0. PATING :DC 12V 50mA
- 1.1. VOLTAGE :30 VDC (R.M.S.)
- 1.2. CURRENT :0.2AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
- 1.3. TEMPERATURE : -20°C TO +70°C
- 2.0. INSULATION RESISTANCE :100 MEGOHMS INITIAL
- 2.1. CONTACT RESISTANCE :SEE PRODUCT SPECIFICATION
- 2.2. DIELECTIC WITHSTANDING VOLTAGE :500 VAC AT SEE LEVEL
- 2.3. LIFE :100000 CYCLES
- 3.0. MATERIAL SEE BILL OF MATERIAL :



B

C

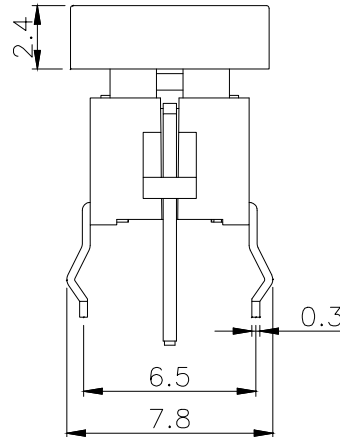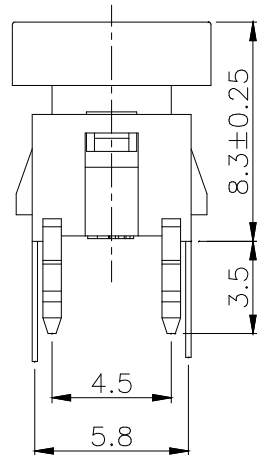

CIRCUIT

P.C.B LAYOUT



LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Green Pure	Red Yellow	Yellow Red	Blue Red	Green Yellow

BILL OF MATERIAL :

6	LED	1	FS-TS-2007-06-00	TS-2007 LED	详见附表	/
5	SPRING	1	FS-TS-2007-05-00	TS-2007 SPRING	SUS 301	PLATING SILVER
4	BUTTON	1	FS-TS-2007-04-00	TS-2007 BUTTON	PA66	/
3	COVER	1	FS-TS-2007-03-00	TS-2007 COVER	PBT	/
2	CONTACT	1	FS-TS-2007-02-00	TS-2007 CONTACT	BRASS	PLATING SILVER
1	HOUSING	1	FS-TS-2007-01-00	TS-2007 HOUSING	PA66	BLACK
ITEM	PART NAME	Q'TY/EA	DRAWING NO	PART NUMBER CODE	MATERIAL	COLOUR

GENERAL TOLERANCE		ANGLE TOLERANCE		 东莞市福顺电子科技有限公司 DONGGUAN FOSEN ELECTRONICS TECHNOLOGY CO.,LTD			
X.	±0.38	X.°	±3.0°				
.X	±0.25	.X°	±2.0°				
.XX	±0.15	.XX°	±1.0°				
.XXX	±0.10						
MAJOR (QC CHECKED) : ▼ = 2 Places		SCALE 1 : 1		DESIGN YC.CHEN	DATE 23/04/21	TITLE 6.0X6.0mm NUDGE SWITCH SERIES	
CONTROL POINT FAI : to		UNIT mm		CHECK JX.ZHOU	DATE 23/04/21	TS-2007	
CRITICAL (Cpk & Cp) : [X] = Places				APPROVED DAVID.YU	DATE 23/04/21	SERIES NUDGE SWITCH SERIES	SIZE A4
SHEET 1 OF 1				DRAWIN NO FS-TS-2007-00-00	REV A		

A

B

C

D

E

F

1 2 3 4 5 6 7 8