
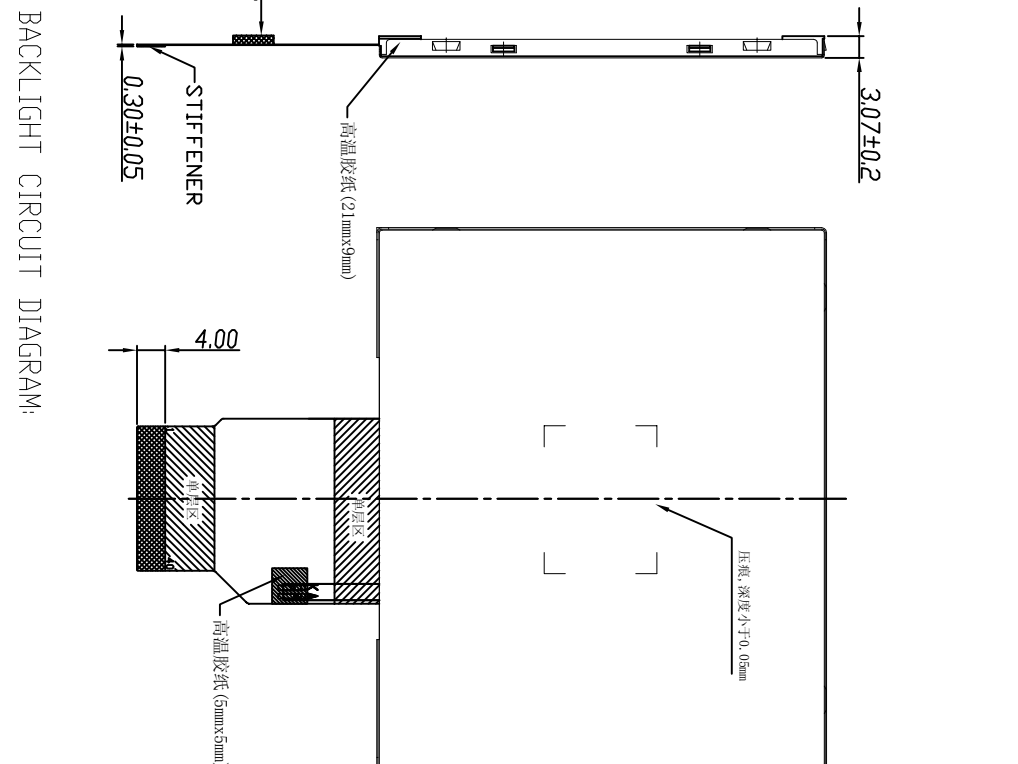


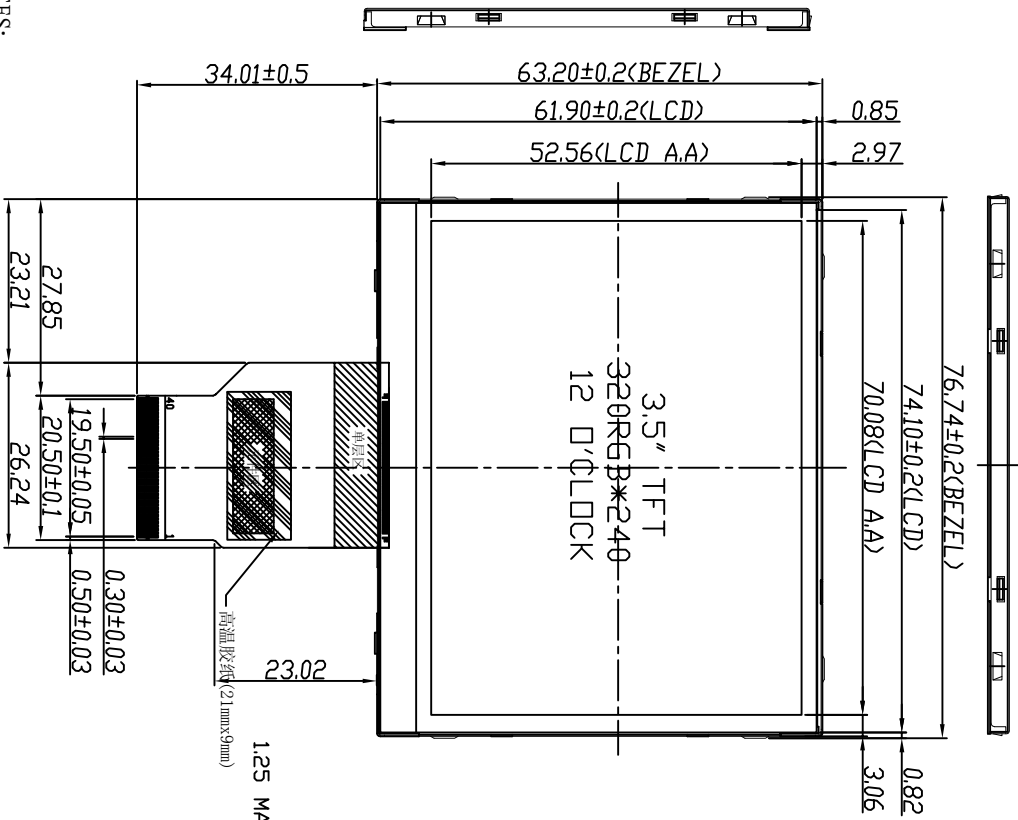


PIN	SYMBOL
1	NC
2	RESET
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	LEDA
23	NC
24	LEDK
25	GND
26	VCC
27	CSB
28	SDA
29	SCL
30	HSYCN
31	VSYNC
32	DCLK
33	D7
34	D6
35	D5
36	D4
37	D3
38	D2
39	D1
40	D0

NOTES:

1. DISPLAY TYPE: 3.5" a-Si Transmissive TFT, 262K color.
2. VIEWING DIRECTION: 12:00 O'CLOCK.
3. LCD DRIVER: HX8238-D
4. DRIVING METHOD: -
5. LOGIC VOLTGE: VDD=3.0~3.6V.
6. BACK-LIGHT: 6 White LEDs Serial, 20mA.
7. OPERATING TEMPERATURE: -20° C ~ +70° C.
8. STORAGE TEMPERATURE: -30° C ~ +80° C.
9. "*" IS CRITICAL DIMENSION.
10. "O" IS REFERENCE DIMENSION.
11. PRODUCT CONFORM TO ROHS COMPLIANCE REQUIREMENT.

BACKLIGHT CIRCUIT DIAGRAM:



ISSUE	AMENDMENT	NAME	DATE	CHECKED	APPROVED	APPROVED BY	DATE	SIGN	DATE	DATE
1	FIRST	LONG	20150109							
TITLE: MODULE_SPECIFICATION										
ITEM NO.: Y35003M01N REV.: V0										
DWG NO.: Y35003M01N SHEET: 1/1										

三圆科技有限公司
SAN YUAN TECHNOLOGY CO., LTD