

Camera Link Cable


Features

- Rated Temperature: 60°C or 80°C
- Rated Voltage: 30V
- Conductor: 28AWG tin-coated stranded wires
- Insulation: PE
- Sheath: aluminum foil and braid
- Jacket: specially adapted PVC
- Structure: (1P+AL)*11C+4D+PTFE Transparent Tape +AL+B
- Bending Fatigue: 5 million times
- User case scenarios: real-time data transmission and fast synchronization for industrial cameras, machine tools and other equipment

Specifications

- Length: 5m/7m/10m/15m
- High flexibility, high resistance to bending and dragging fatigue

Structural Diagram

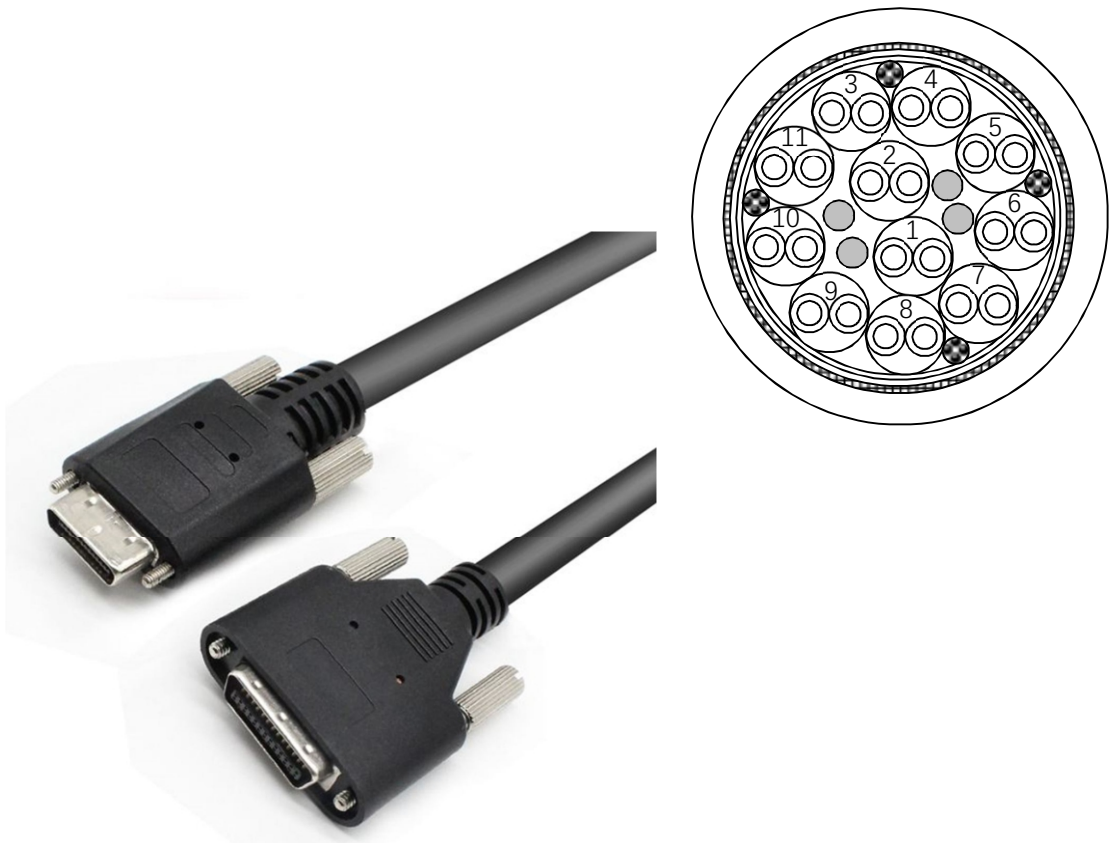

YENHONG ELEC. LTD

100 - 838 FORT STREET, VICTORIA BC V8W 1H8, CANADA
TEL: +1 250 885 6875 FAX: +1 250 797 5503
WWW.YENHONG.CA