

SPECIFICATION

A: MATERIAL:

- 1.HOUSING: PBT WITH GLASS FIBER UL 94V-0
- 2.TERMINAL: COPPER ALLOY,TIN PLATED

B: CHARACTERISTICS:






- 1.RATING: 15A 250V~ UL,CUL
10A 250V~ ENEC & CCC
- 2.INSULATION RESISTANCE : 100MΩ MIN, AT 500V DC
- 3.ELECTRIC STRENGTH : AC 2,000V FOR ONE MINUTE

C: APPROVALS:


CUL , ENEC & CCC

D: ORDERING INFORMATION :


ORDER#	DIM. A	DIM. B	DETAIL VIEW	TERMINAL TYPE
0707-1-FW1	50.0	5.5	B	9.20 ø1.70 6.30
0707-1-CW1	50.0	5.5	A	
0707-1-CQ	50.0	5.5	A	7.00 ø2.80X3.3L 4.80
0707-1-CQ1	49.0	4.0	A	
0707-1-FQ	50.0	5.5	B	
0707-1-CN	50.0	5.5	A	5.50 ø2.00X3.2L 4.00
0707-1-FN	50.0	5.5	B	
0707-1-CS	50.0	5.5	A	3.50 ø1.5X2.5L 2.50
0707-1-FS	50.0	5.5	B	

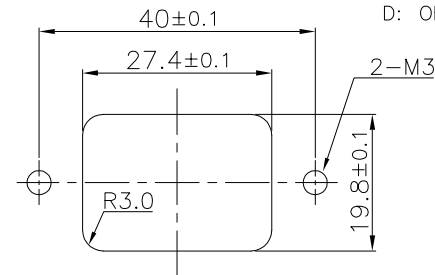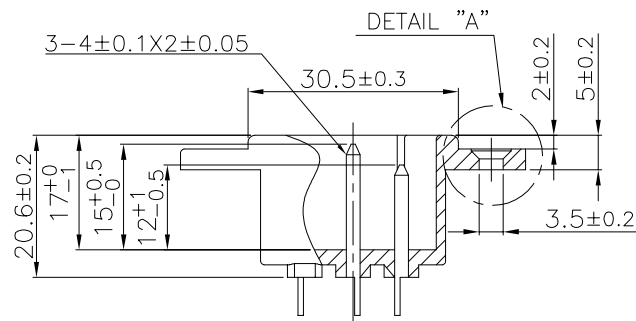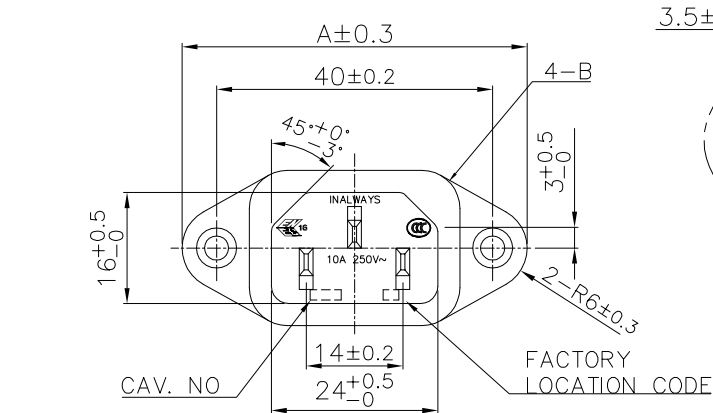

FOR FRONT MOUNTING USE
PANEL CUT-OUT

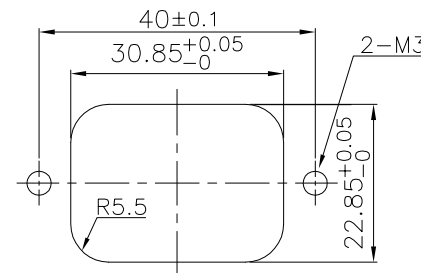

FOR REAR MOUNTING USE
PANEL CUT-OUT

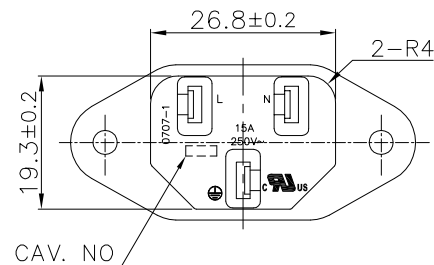

REV	DATE	DOCUMENT	DESCRIPTION
Z	2021.06.08	DGR21005	更改安规刻字
Y	2012.08.02	DGR12018	REVISE UL MARK



TOLERANCE UNLESS OTHERWISE MARKED
DIMENSION: .000 : ±0.1
.00 : ±0.2
.0 : ±0.3
ANGULAR: ±3°

UNIT	SCALE	SHEET
mm	1 : 1	1 of 1

PART NO.: SEE PARTS LIST		NAME: AC INLET 3P SOCKET	
MATERIAL:		SPEC.: IEC 60320-1,C14	
APPROVED	CHECKED	DESIGNER	NOTE:
研发部 2021.08.11 兰锐	研发部 2021.08.11 兰锐		JOB NO.: S707-0011