


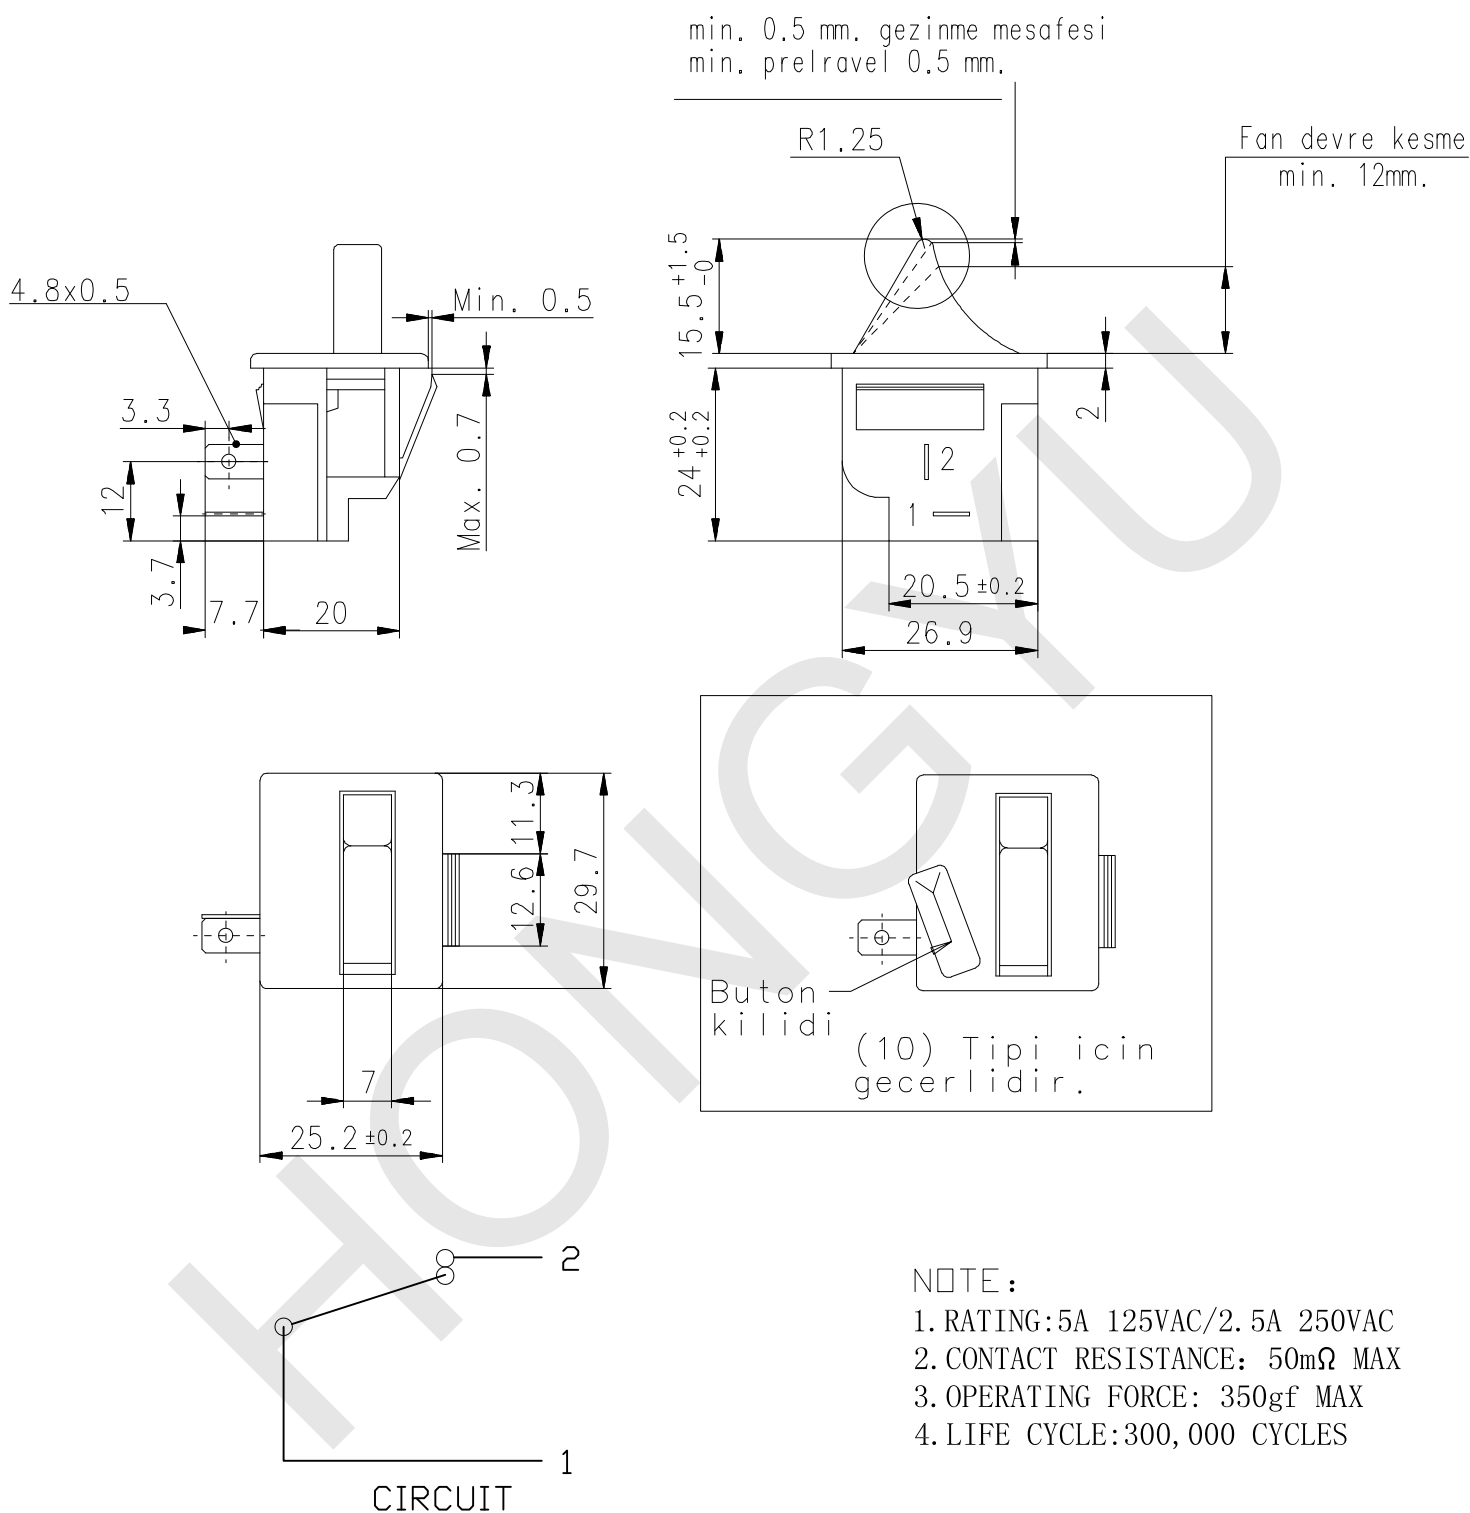

NOTE :

1. RATING: 5A 125VAC/2. 5A 250VAC
2. CONTACT RESISTANCE: 50mΩ MAX
3. OPERATING FORCE: 350gf MAX
4. LIFE CYCLE: 300, 000 CYCLES

		MODEL	HDS3025-16T-SPST				惠州市宏宇高科电子有限公司 Huizhou City HongYu High-Tech Electronics Co., Ltd.		
		DWG NO	TZ-HDS3025-B-001						
5				TOL. UNLESS OTHERWISE SPEC	SCALE		DRAW	CHKD	APPD
4				BASIC DIMENSIONS	TOL.	/			
3				<10	±0.3	UNIT			
2				10~100	±0.5	mm			
1				>100	±0.8	VERSION			
	DATE	REVISION	DESIGN	ANGLE	±5°	AO	丘 2018.08.21 志敏	黄 2018.08.21 力文	卓 2018.08.21 红雨