客 户：	20042
客户确认签名：	

REV.	DESCRIPTION	DATE
A4	按客户要求出图	2023-10-23

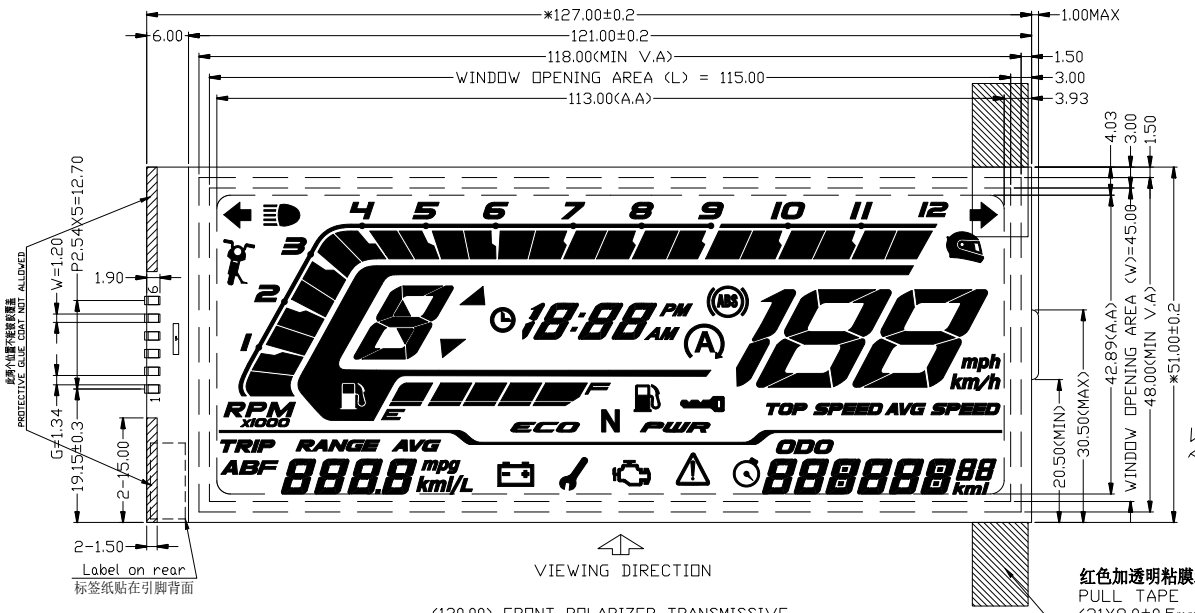

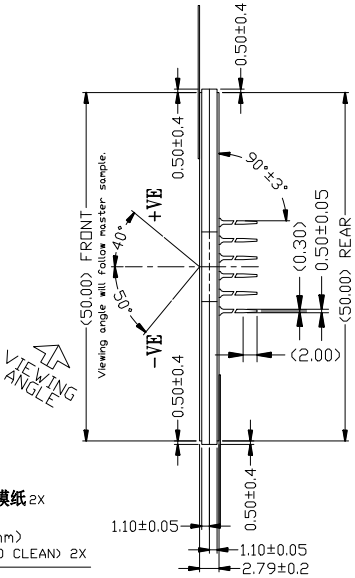

Interface:I2C
Slave address:0,1,1,1,1,1,0

PIN CONNECTION	
1	
2	
3	
4	
5	
6	

红色加透明粘膜纸 2X
PULL TAPE
(21X8.0±0.5mm)
(COLOR:RED AND CLEAN) 2X

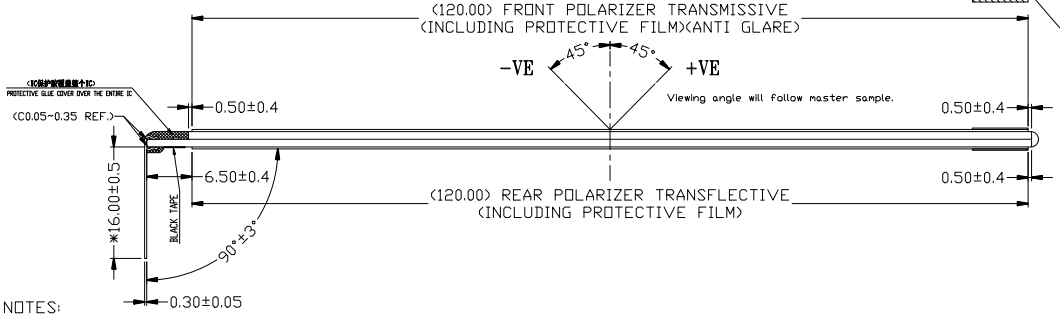

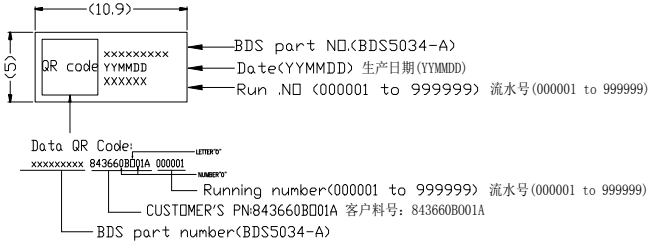

NOTES:

1. OPERATING TEMP: -30°C~85°C
2. STORAGE TEMP: -40°C~95°C
3. VIEWING DIRECTION: 6:00
4. DISPLAY TYPE: TBN/NEGATIVE/TRANSFLECTIVE
5. DRIVING WAVEFORM: A wave≥120Hz
6. LCD DRIVER IC:
7. UNSPECIFIED TOLERANCES: ±0.2mm.
8. ( ) MEANS: DIMENSION FOR REFERENCE,
   * MEANS CRITICAL DIMENSION
9. THE PROTECTIVE FILMS ON BOTH SIDES OF LCD MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER
(客户在装机时，自己必须撕掉保护膜)
10. ESD CONDITION(PRODUCT)
    TEST VOLTAGE:±25KV(AIR DISCHARGE)
    TEST VOLTAGE:±25KV(CONTACT DISCHARGE)
    Notes: BDS will follow master sample. can only ensure:Air discharge ±15KV,And contact discharge ±8KV.
    Truly will consider these issues at the design stage and cooperate with customer to achieve this.
11. contrast ratio 500:1 will follow master sample

显示面积:84

Beverly Display Solutions

GENERAL TOL. 0.20	UNITS MM	外观图(APPEARANCE DESIGN)		
APPROVALS	DATE	PRODUCT NO.:		SCALE: NOT TO SCALE
DWN: CL	2023/10/23	SJXD5034-A-00-VTNI	PROJECTION	
CHK: YQM	2023/10/23			PAGE: 1 OF 7
APP: GHQ	2023/10/23			

www.sccdisplay.com

www.sccdisplay.com

www.sccdisplay.com

www.sccdisplay.com

www.sccdisplay.com

www.sccdisplay.com