

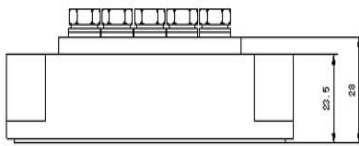


Three Phase Rectifier Bridge

$$I_{dAV} = 150 A$$

$$V_{RRM} = 1000-2400V$$

V_{RRM} (V)	V_{RSM} (V)	TYPE
1000	1100	MDS150-10
1200	1300	MDS150-12
1600	1700	MDS150-16
1800	1900	MDS150-18
2200	2300	MDS150-22
2400	2500	MDS150-24



Maximum Ratings

Symbol	Item	Conditions	Ratings	Unit
I_D	Output current (D.C.)	Three phase. full wave. $T_c=94^{\circ}C$	150	A
I_{FSM}	Surge Forward Current	1 cycle, 50/60Hz, peak value, non-repetitive	1100/1200	A
I_t^2	I_t^2	Value for one cycle of surge current	6000	A^2S
T_j	Junction Temperature		-40 to +150	$^{\circ}C$
T_{stg}	Storage Temperature		-40 to +125	$^{\circ}C$
V_{iso}	Isolation Breakdown Voltage (R.M.S.)	Main Terminal to case 1minute	2500	V
M_d	Mounting	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)



YANGZHOU POSITIONING TECH. CO., LTD

	torque	Terminal(M5)	Recommended Value1.5-2.5 (15-25)	2.7 (28)	
--	--------	--------------	----------------------------------	----------	--

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{RRM}	Repetitive Peak Reverse Current, max.	T _j =150 °C at V _{RRM}	6.0	mA
V _{FM}	Forward Voltage Drop, max.	I _{FM} =150A, T _j =25 °C Inst. measurement	1.35	V
R _{th(j-c)}	Thermal Impedance, max.	Junction to case	0.14	°C/W



Tel: +86-514-87782298, 87782296 FAX: +86-514-87782297, 87367519
E-mail : positioning@china.com; yzforever@vip.tom.com; yzpst@pst888.com
WEB SITE: <http://www.pst888.com> www.yzpst.cc

