

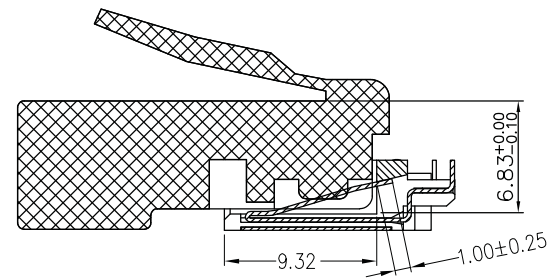
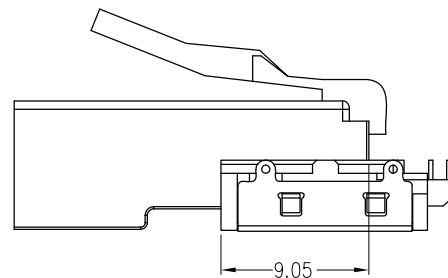


RoHS Compliant

REV.	ECN.NO.	MODIFY.CONTENT
A		NEW
B	EN190803002	修改端子弹高, 2.47改为1.97

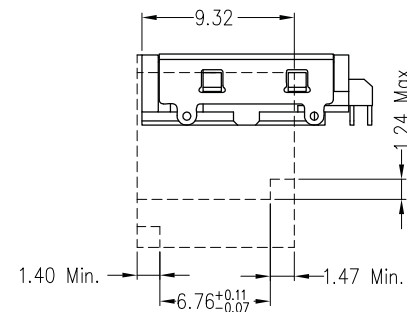


AT MATED RJ45 PLUG(REFERENCE)

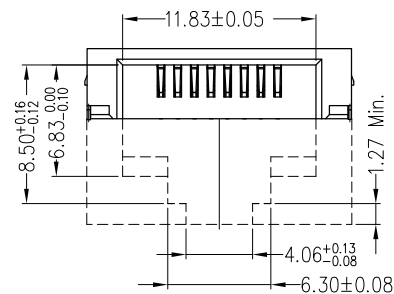

RECOMENDED REC DIMENSIONS
PLUG MUST BE FOLLOW FCC
PART 68.5 SPEC

PIN DEFINE

1	PR1+
2	PR1-
3	PR2+
4	PR3+(UNUSED)
5	PR3-(UNUSED)
6	PR2-
7	PR4+(UNUSED)
8	PR4-(UNUSED)

GENERAL	TOLERANCE	DWG.NO.	HK01-863-00	PART.NO.	HK01-06A863-01	DRAWN	michael 2019.08.03	UNIT	mm	SCALE	1:1
X.±0.50	x. °± 5°	REV.	B	TITLE	RJ45 PH1.02 H4.3 HALF TYPE	CHECKED	J.M 2019.08.03	 华凯电子科技有限公司 HUAKAI ELECTRONIC TECHNOLOGY CO., LTD			
.X±0.38	.x °± 2°	SIZE		SHEET	2 OF 2	APPROVED	H.Zhu 2019.08.03				
.XX±0.25	.xx°± 1°	A4									


包装作业规范

7	8	9
REV.	ECN.NO.	MODIFY.CONTENT
A		NEW


包装作业图示及说明 (PACKING OPERATION DIAGRAM & INSTRUCTION)

1. QUANTITY: 550 PCS

2. COVER TAPE PEELING FORCE:




3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

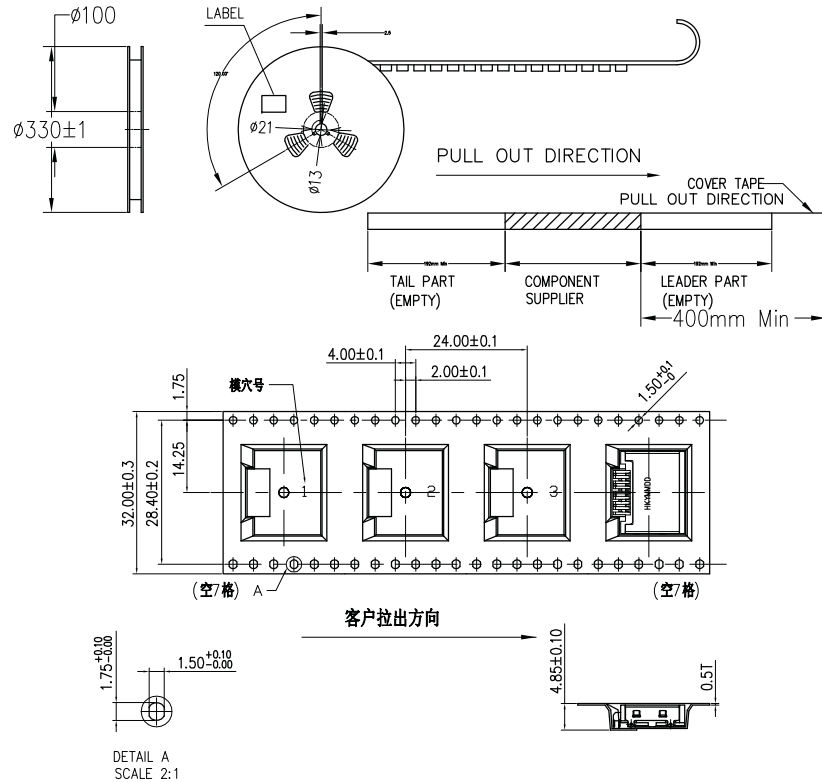

PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
HK01-06A863-01	4400 (PCS)	550 (PCS)	8

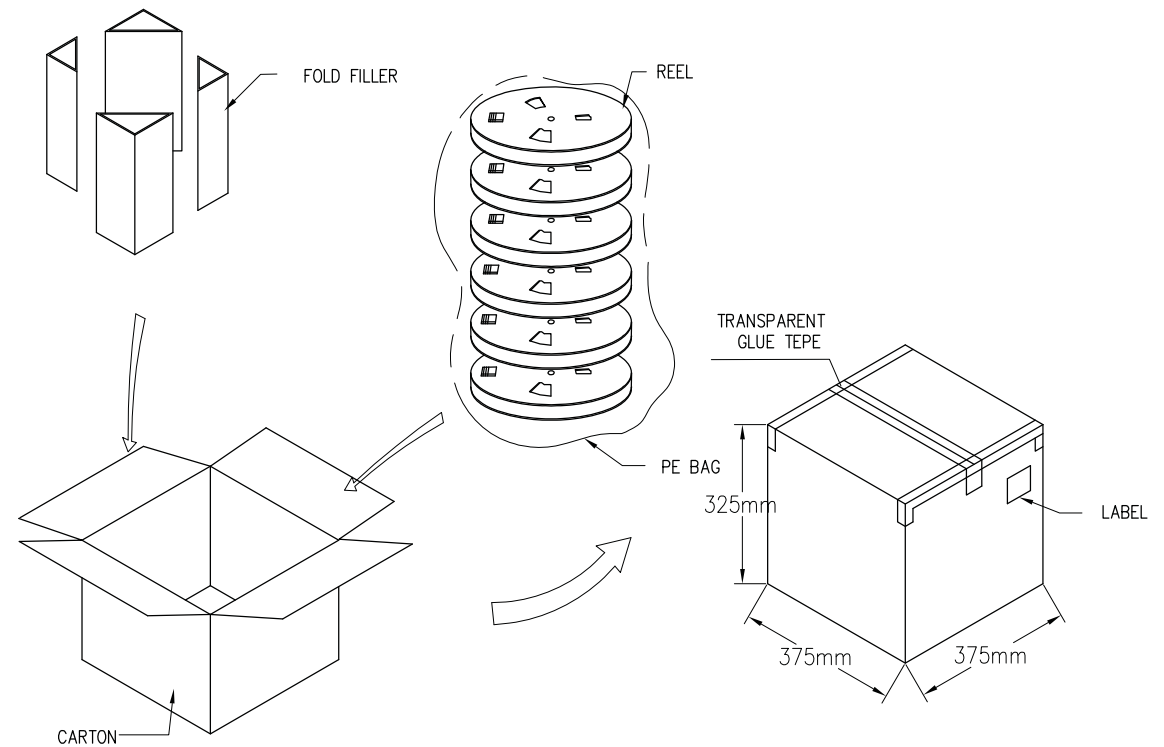

GENERAL	TOLERANCE	DWG.NO.	HK01-863-00	PART.NO.	HK01-06A863-01	DRAWN	michael 2019.01.01	UNIT	mm	SCALE	1:1
X±0.50	x. ±5°	REV.	A	TITLE	RJ45 PH1.02 H4.3 HALF TYPE 包装规范	CHECKED	J.M 2019.01.01	 华凯电子科技有限公司 HUAKAI ELECTRONIC TECHNOLOGY CO., LTD			
.X±0.38	.x ±2°	SIZE	A4	SHEET	1 OF 1	APPROVED	H.J 2019.01.03				
.XX±0.15	.xx ±1°	A4									