


PS-5 SERIES

LOW PROFILE MAIN POWER SWITCHES 16A 250VAC
 DPST,SPST, cleat or snap in 13X19mm, illuminated

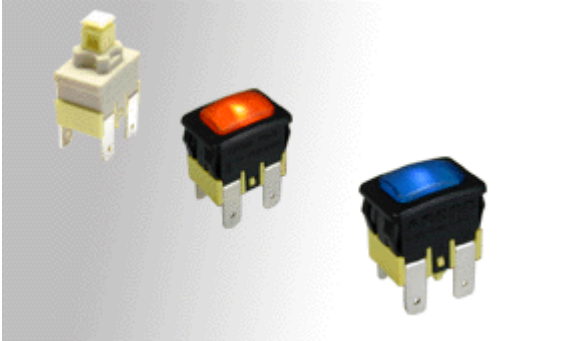

#Finger Ring light effect, appealing outlook, up to 16

- | 16A 125/250VAC (UL, CSA)
- | 3/4 HP 125/250VAC (UL/CUL)
- | 16(4)A 250VAC~ T125/55 (VDE, ENEC)
- | 16(8)A 250V~T125/55 (VDE, ENEC)
- | Initial contact resistance : 20m max.
- | Insulation resistance : 100M min, at 500VDC
- | Dielectric strength : 1,000 VAC for 1 minute
- | Temperature range : -20to +125degrees in celsius
- | Switch for class II appliances
- | Base : Nylon 66/PBT, UL rated 94V-2 min
- | Actuator : Nylon 66/PC, UL rated 94V-2 min
- | Spring : Piano wire
- | Contacts : Silver alloy
- | Terminal : Silver plated copper

How to order

Cleat Mounting

Snap-in Panel Cutout
X=Panel Thickness

X	Dim.Y	Dim.Z
0.75 to 1.25mm	19.2 + 0 / -0.1	12.9 + 0.15 / - 0
1.25 to 2 mm	19.4 + 0 / -0.1	12.9 + 0.15 / - 0
2 to 3 mm	19.8 + 0 / -0.1	12.9 + 0.15 / - 0

PS5-212-L0

Technical drawing showing dimensions (mm):
 Top view: 19.00 (width), 12.80 (height), 7.40 (inner width)
 Front view: 17.00 (width), 12.00 (height), 4.20 (terminal height), 10.70 (terminal spacing), 1.20 (terminal width), 3.80 (terminal base width), 0.70 (terminal base width), 0.149 (terminal base width), 2.75 (terminal base width)
 Side view: 23.6 (width), 5.00 (height), 4.72 (terminal height), 12.00 (terminal spacing)

