


SPECIFICATIONS:

- 1、Rated Voltage: 0.66KV;
- 2、Insulation Voltage: 2KV;
- 3、Rated Frequency: 50HZ or 60HZ;
- 4、Operating Temperature: -15℃ to +40℃;
- 5、Flame resistance: UL94-V0;
- 6、Certificates: CE、UL、ETL。

FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current

DIMENSIONS(mm):

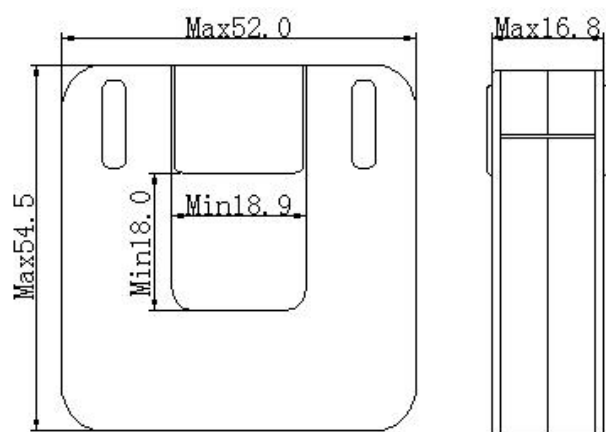

PARAMETERS:

Model	Input (A)	Max current (A)	Output
XH-SCT-0750	0-200	200	mA/0.333VAC/0-3 VAC

五、 CURVE PERFORMANCE:

