


Terminal Blocks, PP & Brass Type

- Polypropylene, UL 94V-2 flame-retardant shell rated at T85 (IEC), 105°C/221°F (UL).
- Metal parts feature steel screws and nickel-plated brass contacts.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Modular 12-circuit design can be cut into desired number of poles.
- Pre-cutting is available upon request.
- Certified to IEC/EN 60998 and Recognized to UL 1059.

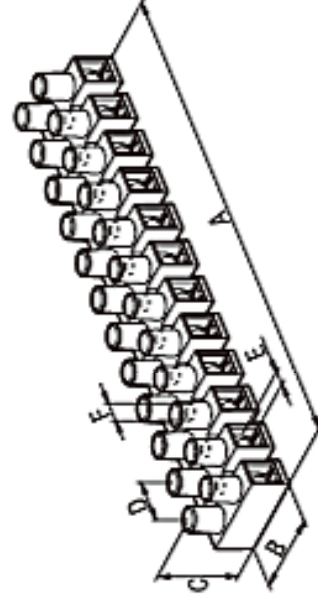

Cat. No.	Dimensions (mm/inches)						Screw
	Unit	A	B	C	D	øE	
PA8P	mm	96,20	16,30	14,50	8,20	2,80	2,90
	in.	3,787	0,642	0,571	0,323	0,110	0,114
PA10P	mm	116,2	20,10	16,70	10,00	3,40	3,90
	in.	4,575	0,791	0,657	0,394	0,134	0,154
PA12P	mm	139,6	23,40	18,60	12,00	4,20	3,80
	in.	5,496	0,921	0,732	0,472	0,165	0,150
PA14P	mm	158,0	25,50	20,00	13,50	5,00	4,30
	in.	6,220	1,004	0,984	0,532	0,236	0,169
PA16P	mm	169,8	28,00	23,00	14,50	6,00	4,20
	in.	6,693	1,106	0,906	0,571	0,236	0,165
PA18P	mm	194,4	36,90	28,70	16,50	7,00	4,20
	in.	7,654	1,453	1,130	0,650	0,295	0,165

Cat. No.	Wire Protectors	Color	No. of Poles	Electrical Ratings & Wire Range	Approvals	Packing
PA8P	Without	White	12	17,5A, 450V, T85°C		Bag of 50 Carton of 500
	Without	Black		0,75-1,5 mm², Rigid/Flexible 20A, 300V, 105°C (221°F) 22-12 AWG, Sol/Str Cu		
PA10P	Without	White	12	24A, 450V, T85°C		Bag of 50 Carton of 500
	Without	Black		1-2,5 mm², Rigid/Flexible 30A, 300V, 105°C (221°F) 22-10 AWG, Sol Cu 14-10 AWG, Str Cu		
PA12P	Without	White	12	41A, 500V, T85°C		Bag of 50 Carton of 500
	Without	Black		2,5-6 mm², Rigid/Flexible		
PA14P	Without	White	12	57A, 500V, T85°C		Bag of 25 Carton of 250
	Without	Black		4-10 mm², Rigid/Flexible		
PA16P	Without	White	12	76A, 500V, T85°C		Bag of 20 Carton of 200
	Without	Black		6-16 mm², Rigid/Flexible		
PA18P	Without	White	12	101A, 500V, T85°C		Bag of 10 Carton of 100
	Without	Black		10-25 mm², Rigid/Flexible		