



SS008B SERIES


DC SLIDE SWITCHES UP TO 0.3A 30VDC
2P2T,PCB Mounting

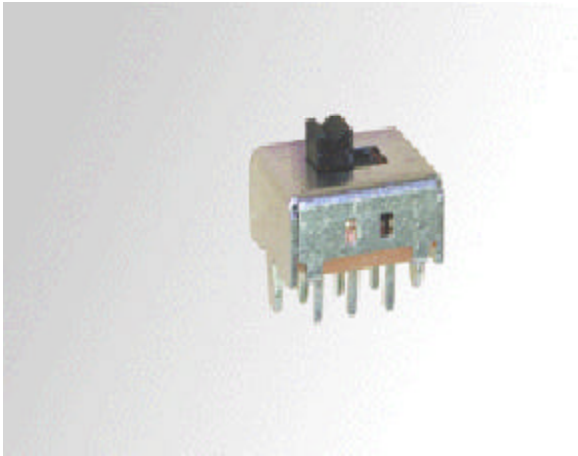


SCHEMATIC



P.C.B HOLE DETAIL

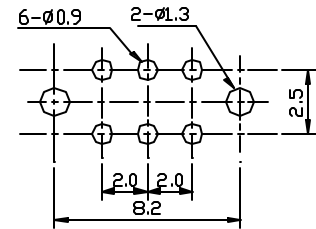

- Rating :0.3A 30VDC
- Contact resistance : 50m Ω max.
- Insulation resistance : 100M Ω min., 250VDC.
- Withstand voltage: 250VAC for 1 minute.
- Life : 10,000 cycles.
- Operation force : 200 $\pm$ 150g.
- Frame: Nickel plated steel
- Actuator: Thermoplastic
- Base: Phenolic Laminate
- Contact: Copper alloy
- Terminal: Copper alloy



SS008B-01P-22(L=2.0mm)
SS008B-02P-22(L=4.0mm)
SS008B-03P-22(L=6.0mm)

