




Features & Picture:

- ◆ Mini rotatable Vehicle Camera with bracket
- ◆ Dual Video output
- ◆ Provide the picture view outside and cabin inside at the same time
- ◆ Double camera: Either of them is Rotatable provide flexible viewing angle
- ◆ Night Vision: 10pcs IR Lights available for selection
- ◆ Random combinations:
 - a. IR camera+ no IR camera
 - b. IR camera+ IR camera
 - C. no IR camera+ no IR camera
- ◆ Flexible resolution TV Line available for selectic
- ◆ Easy installation
- ◆ Dimension: L86.4xW39 xH47.7(mm)

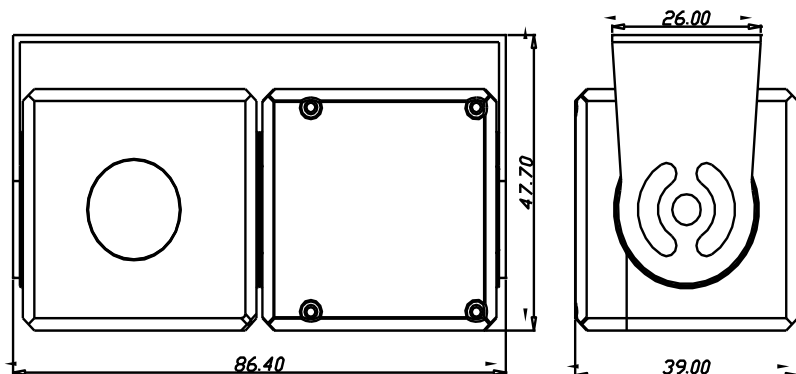

Specifications

Model	550ST-DC	650SN-DC	701SN-DC
Pick up Device	1/3" SONY Color SuperHAD II Low Lux CCD		
Signal Format	PAL or NTSC (color)		
Picture Elements	PAL:752(H)x582(V); NTSC:768(H)x494(V)		PAL:976(H)x582(V); NTSC:976(H)x494(V)
Horizontal Resolution	550TVL	650TVL	700TVL
Sensitivity	0 Lux(Infrared LED On,at F1.2) / 0.05 Lux at F=1.2		
Infrared LED	10 Leds / N/A		
Infrared LED Range	10m / N/A		
Scanning System	PAL:625 TVL; NTSC:525TVL 2:1 Interlace		
Synchronization	Internal sync.		
Infrared Spectrum	N/A		
S/N Ratio	Over 50dB(AGC off)		
Auto Gain Control	Auto		
White Balance	Auto		
Electronic Shutter	Auto		
Back Light Compensation	Auto		
Video Output	1 Vp-p,75ΩComposite ,BNCx2		
Audio Output	N/A		
Mirror	Optional		
Gamma Ratio	0.45		
Auto-iris Lens Control	N/A		
Lens	f2.5mm~12mm		
Lens Mount	M12xP0.5mm Thread		
Exterior Focus Adjustment	N/A		
Pan Adjusting	Available		
Tilt Adjusting	Available		
Power Supply	12V DC ±10%, Ø 2.0mm DC Jack x1		
Power Consumption	150mA		
Dimensions(LxWx H)	L86.4xW39 xH47.7(mm)		
Net Weight	240g		
Weatherproof/Waterproof	Weatherproof (IP65)		
Operating Temperature	-10°C to +50°C		

*Specifications are subject to change without prior notice