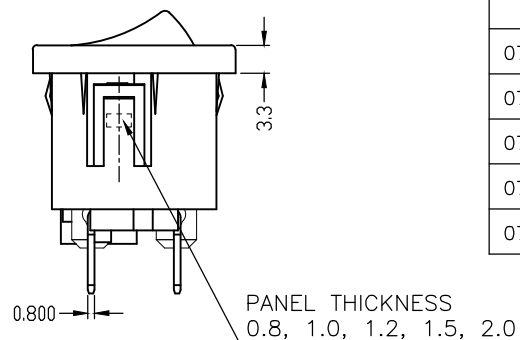
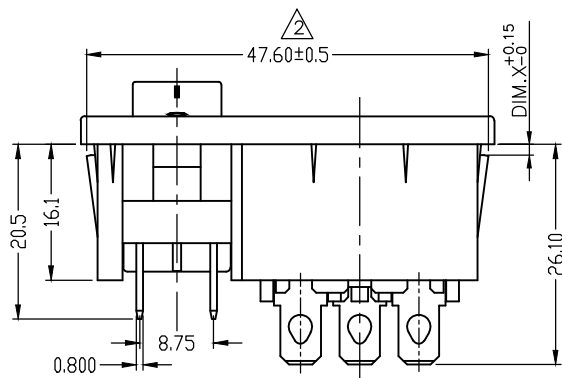

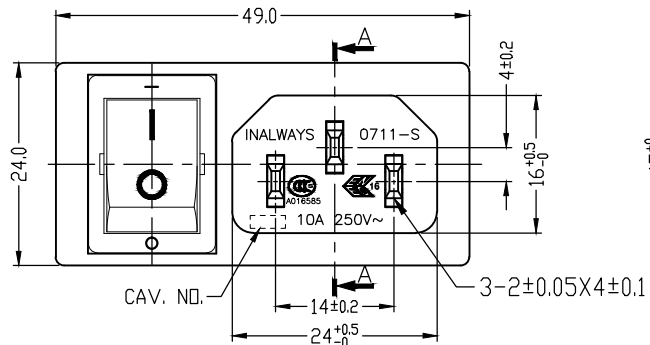


SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, BLACK, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:

1. RATING: 10A 250V~ EUROPE
15A 250V~ NORTH AMERIC.
2. INSULATION RESISTANCE: OVER 100MΩ 500 VDC
3. DIELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTUE

C: APPROVALS:

UL, CUL, ENEC & CCC

D: ORDERING INFROMATION:

P/N	DIM.X	PANEL THICKNESS	SWITCH'S TERMINAL
0711-SPQD08-H	0.90mm	0.8 mm	
0711-SPQD10-H	1.10mm	1.0 mm	
0711-SPQD12-H	1.30mm	1.2 mm	
0711-SPQD15-H	1.60mm	1.5 mm	
0711-SPQD20-H	2.10mm	2.0 mm	

WIN-KARE TECHNOLOGY CO.,LTD				PART NO.: 0711-SPQDXX-H		NAME: AC INLET 3P SOCKET	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000 : ±0.1 .00 : ±0.2 .0 : ±0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1 C14	
ANGULAR: ±3°				APPROVED	CHECKED	DESIGNER	NOTE:
A				UNIT: mm	SCALE: 1 : 1	SHEET: 1 of 1	JOB NO.: S711-0095

5			
4			
3			
2	2018.08.17	RELEASE	RENEW REVISION
1	2017.03.16	RELEASE	NEW REVISION
REV	DATE	DOCUMENT	DESCRIPTION