


UL 2725 Multi-conductor Cable 多芯电缆

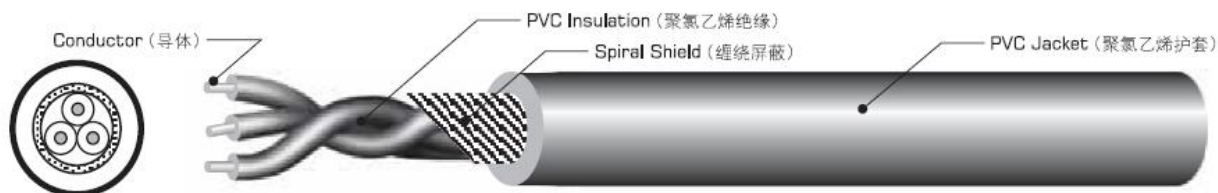

Product Description:

- ★ Rated temperature: 60°C or 80°C
Rated voltage: 30V
- ★ Reference Standard: UL Subject 758, UL1581
- ★ Stranded, tinned or bare copper conductor
- ★ Lead free PVC insulation
- ★ Passes UL VW-1 vertical flame test
- ★ Application: For internal or external wiring of Class 2 systems equipment and electronic equipment

Cores	Stranded Conductor			Insulation		Drain Wire	Overall Shield		Jacket		Maximum Resistance at 20 °C Ω /km
	AWG	No./mm	Dia. mm	Nom. Thick. mm	Nom.Dia. mm	No./mm	Material	Spiral No./mm Braid No./No./mm	Nom. Thick. mm	Nom.Dia. mm	
2	30	7/0.1	0.30	0.25	0.80	-	-	45/0.1	0.50	2.70	354
2	28	19/0.08	0.40	0.15	0.70	-	-	-	0.40	2.20	220
4	30	7/0.1	0.30	0.25	0.80	-	-	59/0.1	0.39	2.90	354
4	26	7/0.16	0.48	0.26	1.00	-	AL	16/5/0.12	0.87	5.00	139
8	30	7/0.1	0.30	0.13	0.56	-	AL	58/0.1	0.70	3.50	354
11	28	7/0.127	0.38	0.22	0.82	7/0.16	AL	16/7/0.12	0.60	5.20	223
11	28	7/0.127	0.38	0.14	0.66	-	-	16/6/0.12	0.38	3.65	223
13	28	7/0.127	0.38	0.14	0.66	7/0.127	AL	16/5/0.12	0.53	4.50	223