


Bushwhacker

D3

16MP and 1080P FHD Video
Wildlife Scouting Camera

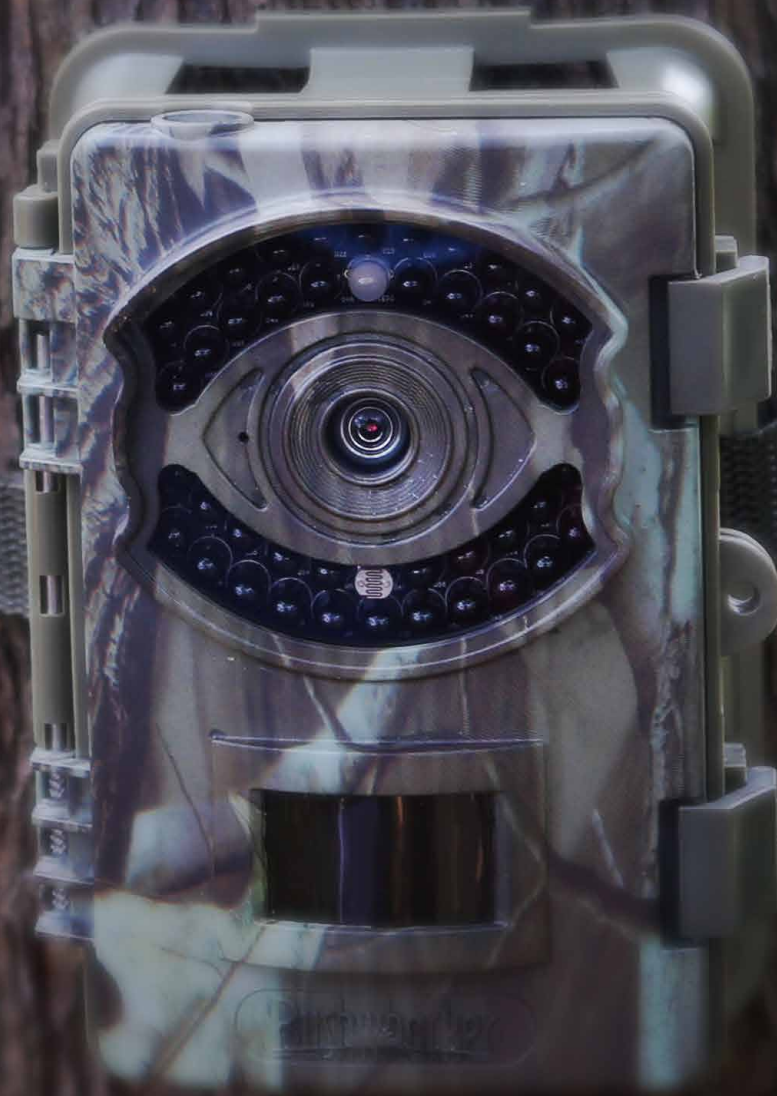

Video



Digital camera



Day&Night



Infrared LED



Timer



1~6 Shooting
numbers



Waterproof



Loop Recording



TV Out



USB Out

D3

16MP and 1080P FHD Video
Wildlife Scouting Camera



**Catch the action
with your BIG EYE**

Features

- Programmable 3/5/8/12/16 Megapixel high-quality resolution
- 1080P@30FPS FHD video with sound
- Black IR, invisible to game
- 90° PIR Angle
- 0.5 seconds trigger time
- 2.4" TFT build-in color viewer, can playback photos and videos
- 42 IR LEDs, Set 20 IR LEDs available in power saving mode
- Support up to 64GB SD card
- PIR Sleep, Interval, Timer
- Temperature and moon phase stamp on the images
- Device number setting enables you to code locations in the photos
- Water resistant
- Auto play in "Slide Show"
- Loop Recording
- Locking important image to avoid being deleted
- Nine-rectangle-grid mode to view images
- Lockable and password protected
- Gear-looking make camera easy to fix firmly
- Color pictures at daytime, monochrome pictures at night




Camera trap for hunting,
animal or incident observation



Indoor/outdoor surveillance for domestic,
office, warehouse, farm or public use



Observing wild animals/plants growth process

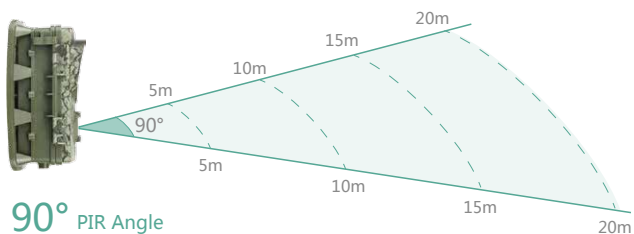

D3 Technical Specifications

Item	Parameters
Picture Size	3MP:1536×2048; 5MP:1944×2592; 8MP:2488×3264; 12MP:3024×4032; 16MP:3480×4640
Video Size	VGA:640×480; WVGA:800×480; 720P:1280×720@30fps; 1080P:1920×1080@30fps
Work Mode	Day/Night
Lens	FOV=90°, F=2.4, Auto IR-Cut
IR Flash	65 Feet/20 Meters
IR Setting	42 LEDs ; 850nm or 940nm
Power Saving	On/Off; 20pcs LEDs available when choosing ON
LCD Screen	2.4" TFT, RGB
Operation Keypad	7 Keys
Beep Sounds	On/Off; Choose Off to turn off the sounds made by pressing the keys.
Memory	SD Card (≤64GB)
PIR Level	Low / Normal / High
PIR Sensing Distance	75 Feet/23 Meters
PIR Sensor Angle	90°
Trigger Time	0.5 Seconds (when using 2GB SD card)
PIR Sleep	3 Seconds~60 Minutes, Programmable
Interval	10 Seconds~24 Hour, Programmable
Shooting Numbers	1~6 Photos (1~3 Photos available when choosing 16MP)
Protect Image	Lock Current, Unlock Current; Lock All, Unlock All
Video Length	5 Seconds~10 Minutes, Programmable
Camera+Video	First take Picture then Video
Playback Zoom	1~8 Times
Slide Show	3 Seconds/5 Seconds/8 Seconds, Programmable
Multi-Image Show	Nine-rectangle-grid mode to view images
Loop Recording	On/Off
Stamps	On/Off, Temperature, Moon Phase, Logo, Time and Date
Timer 1	On/Off, Programmable
Timer 2	On/Off, Programmable
Password	4 Digit Numbers
Device No.	4 Digit and 26 Alphabet set by yourself
Power Supply	4×AA; Expandable to 8×AA
External DC Power Supply	6V/2A
Stand-by Current	0.4mA
Stand-by Time	3~6 Months (4×AA~8×AA)
Auto Power Off	Auto power off in 1~10 minutes while no keypad controlling; Programmable
Power Consumption	200mA (+700mA when IR LED lights up)
Low Battery Alarm	4.8V
Interface	TV out, USB, SD card slot, 6V DC External
Mounting	Strap; Tripod Nail
Waterproof	IP54
Operation Temperature	-22 ~ +158°F/-30 ~ +70°C
Operation Humidity	5% ~ 95%
Certification	FCC&CE&ROHS



Welltar Electronic Technology Co.,Ltd

Why choose WELLTAR

- Original Developer, Original Designer, Original Manufacturer
- Continuous product upgrade & quality improvement
- Reliable after-sale Service
- OEM/ODM for
 - Remote Image Monitoring and Identification System
 - Infrared Detection Cameras



 www.welltar.com
 0086-755-2806 8900
 sales@welltar.com

