

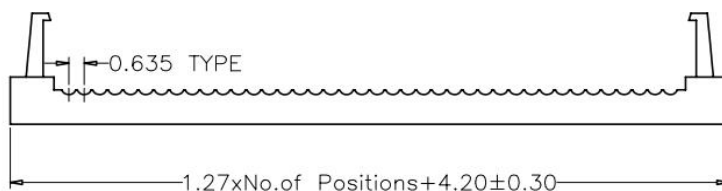

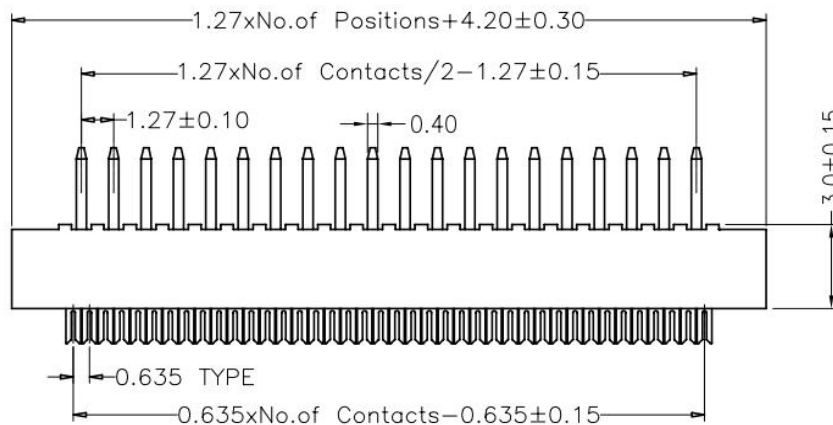


SPECIFICATIONS:

Rated Current	1.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	500V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass or Phosphor Bronze
Contact Plating	Au or SN Over Ni
Insulator Material	PBT -UL94V-0
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds

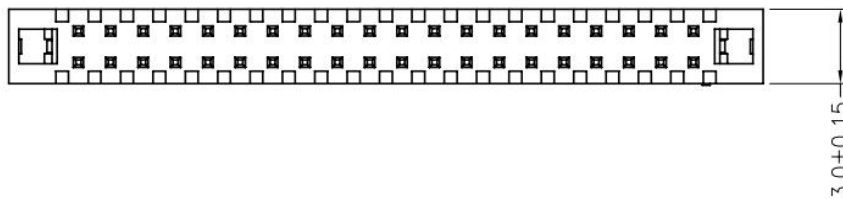

PART NO.	Dimension "A"
5430XXXXXB01	2.00
5430XXXXXB02	3.40

Ordering Information

HC Series	No. of Pin Per Row	Contact Material	Plating Code	Insulator Option	Color Code	Packing Code	End code
HC-DIP30 1.27mm DIP	10P-50P	B=Brass	SN=Tin	A=PBT	B=Black	T=Tube	01
		P=Phosphor Bronze	G0=Gold Flash	C=PA6T	G=Grey	A=Tray	02
			S0=Gold Flash/Tin				