




Customer Approve By

.....		
AO	1' ST DESIGN	YHZ 2021.12.04
A1	修改点阵大小为0.26*0.26mm	YHZ 2021.12.08


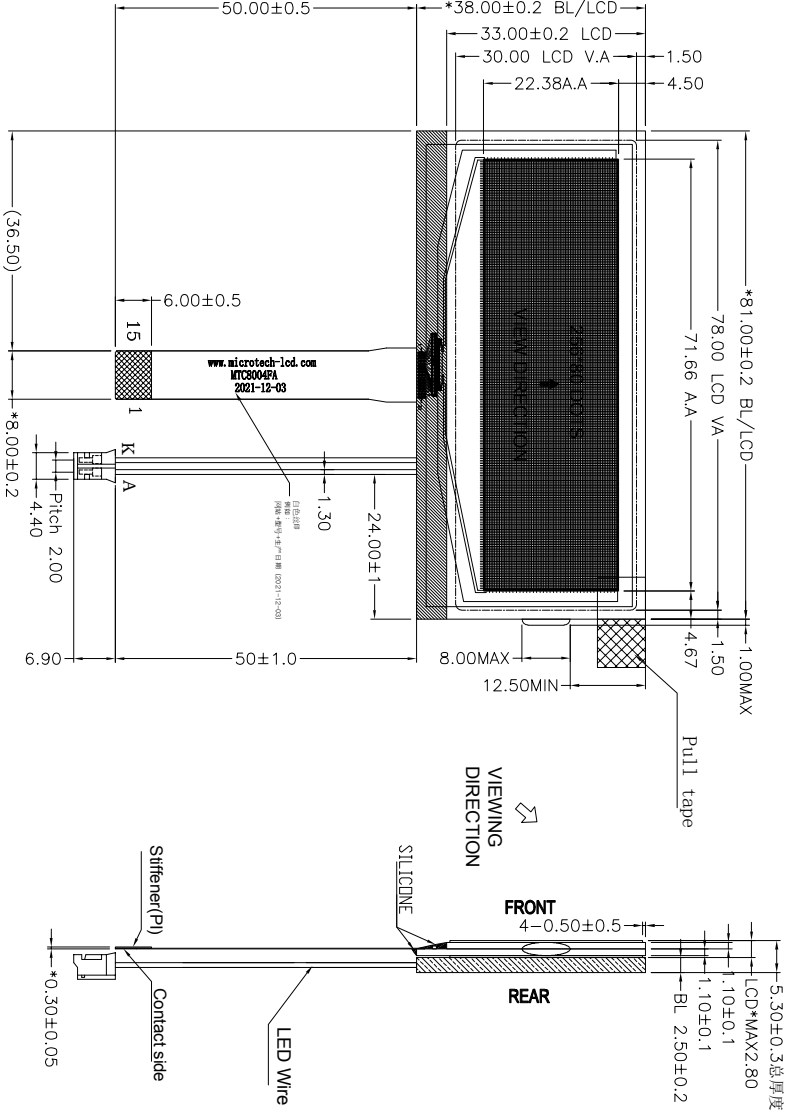


SPI 引脚定义:

NO	PIN
1	VPP
2	EXTB
3	SDA
4	SCL
5	RETB
6	AO
7	CSB
8	VSS
9	VDD
10	CA1N
11	CA1P
12	XV0
13	V0
14	VG
15	VM

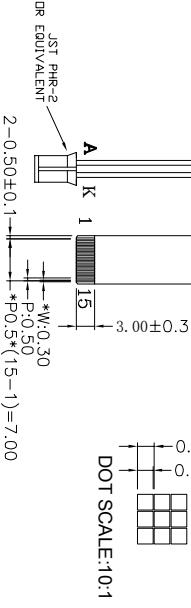


LOGIC ROUTING:

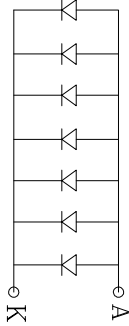

BL CIRCUIT DIAGRAM

- Note:
- 1.Display Mode: FSTN/POSITIVE/TRANSFLECTIVE
 - 2.Driving Condition: 1/80DUTY,1/10BIAS ;VDD=3.3V,VLCD=9.8V
 - 3.Viewing Direction: 6:00 o'clock
 - 4.Operating Temp: -20~+70°C
 - Storage Temp: -30~+80°C
 - 5.LCD Connector: CDG+FPIC
 - 6.IC: ST75256-G
 - 7.Backlight: WHITE LED*7;Vf=3.2V,IIf=140mA
 - 8.Unspecified tolerance is ±0.20mm
 - 9.RDHS Request
 - 10.CONTROL DIMENSION: *
 - 11.REFERENCE DIMENSION: ()
 - 12.Customer P/N:



SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED			
SCALE:1/1	UNIT:mm	DATE	PAGE:1/1
MODEL NO.:GVH25680101-FGFW	APPROVE	CHECK	DESIGNE
PART NO.:			