



电缆识别名: C7-1M

测试总结果: 通过


日期 / 时间: 10/30/2013 08:34:30am
余量: 19.1 dB (NEXT 12-36)
测试限: TIA Cat7 Channel
电缆类型: Cat7 FTP

操作人员: benson
软件版本: 2.1200
测试限版本: 1.2800
NVP: 74.0%

型号: DTX-1800
主机 S/N: 9522103
远端 S/N: 9522104
主机适配器: DTX-CHA001
远端适配器: DTX-CHA001

接线图 (T568B)

通过




3ft





长度 (ft), 极限值 328 [线对 12] 11
传输时延 (ns), 极限值 555 16
时延偏离 (ns), 极限值 50 0
电阻值 (欧姆) [线对 78] 4.4



插入损耗 余量 (dB) [线对 45] 44.2
频率 (MHz) [线对 45] 484.0
极限值 (dB) [线对 45] 48.4

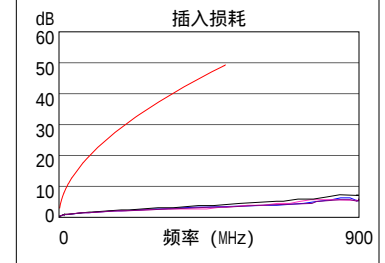



	最差余量		最差值	
	主机	智能远端	主机	智能远端
通过				
最差线对	12-36	12-36	36-45	36-45
NEXT (dB)	18.3	17.7	20.9	20.4
频率 (MHz)	3.3	3.5	493.0	486.0
极限值 (dB)	64.5	64.0	26.3	26.4
最差线对	36	36	45	36
PS NEXT (dB)	18.3	17.1	23.1	21.0
频率 (MHz)	3.3	3.3	493.0	420.0
极限值 (dB)	62.0	62.0	23.4	25.2

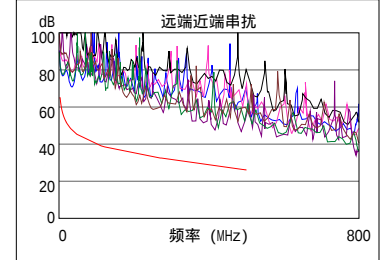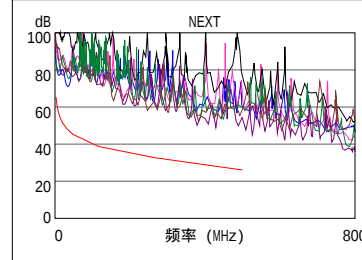

	最差余量		最差值	
	主机	智能远端	主机	智能远端
通过				
最差线对	36-78	36-45	78-36	36-45
ACR-F (dB)	20.8	20.8	21.4	20.8
频率 (MHz)	369.0	484.0	500.0	484.0
极限值 (dB)	11.9	9.6	9.3	9.6
最差线对	36	36	36	36
PS ACR-F (dB)	21.4	20.8	21.4	20.8
频率 (MHz)	483.0	481.0	483.0	481.0
极限值 (dB)	6.6	6.6	6.6	6.6

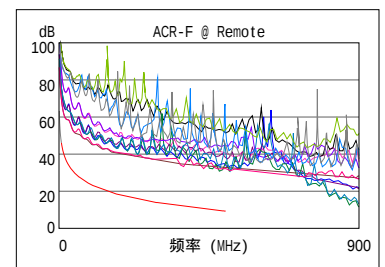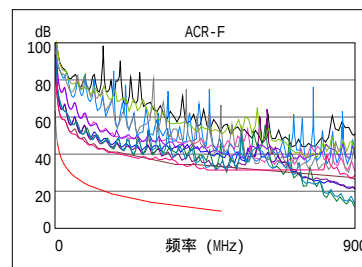

	最差余量		最差值	
	主机	智能远端	主机	智能远端
通过				
最差线对	36	45	36	45
RL (dB)	12.3	8.6	12.3	8.6
频率 (MHz)	474.0	486.0	474.0	486.0
极限值 (dB)	6.0	6.0	6.0	6.0

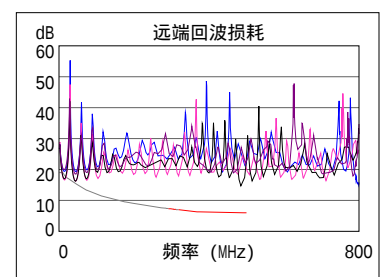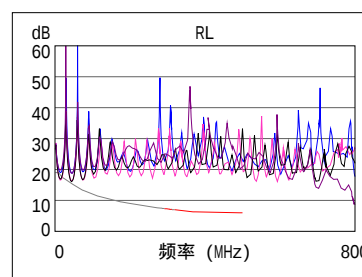

满足的标准:

10BASE-T
100BASE-T
ATM-51
TR-4
100BASE-TX
10GBASE-T
ATM-155
TR-16 Active
100BASE-T4
ATM-25
100VG-AnyLan
TR-16 Passive