

JS-101-1 SERIES

MULTI-FUNCTION SOCKET, UP TO 10A 250VAC

Power inlet with fuse holder or switch

Specification:

Rating: 10A 250VAC

Withstand voltage: AC 2000V 1Min

Insulation Resistance: More than 100M ohms at DC 500V

Operating Temperature: -25 ~ +85 degrees C

Material:

Housing: Nylon#66 UL 94-V0 or V2

Terminal: Psp1-1/2H

Holder spec: for 5*20mm fuse



How to Order:


JR-101-1 () —

Model No.	Panel Thickness		Fuse	Switch Options
F	10	1.0mm	0 W/O Fuse	0 W/O SW
FS	15	1.5mm	1 1 Fuse	1 S.P. SW
FR	20	2.0mm	2 2 Fuse	2 D.P. SW
FRS()	30	3.0mm		3 D.P. SW- red neon
FSA				4 D.P. SW- green neon
FSC				5 S.P. SW- red neon
SB ()				


* this option for FRS, SB only.



JR-101-F

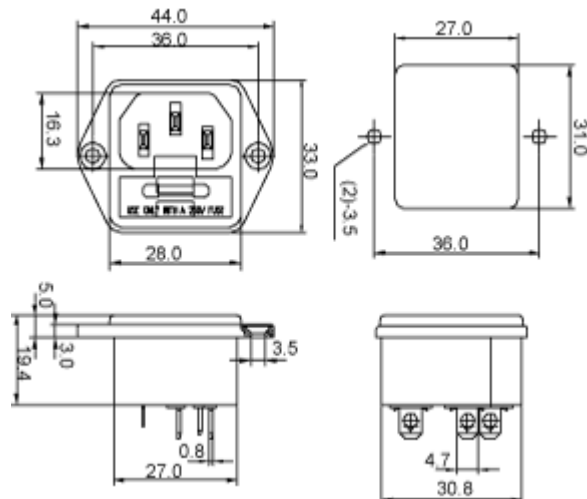


JR-101-1FS

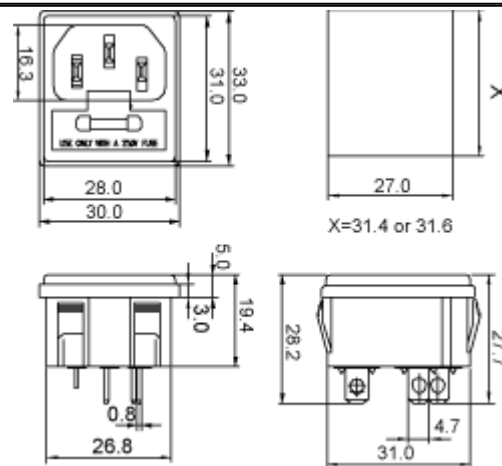





JR-101-1FR-03

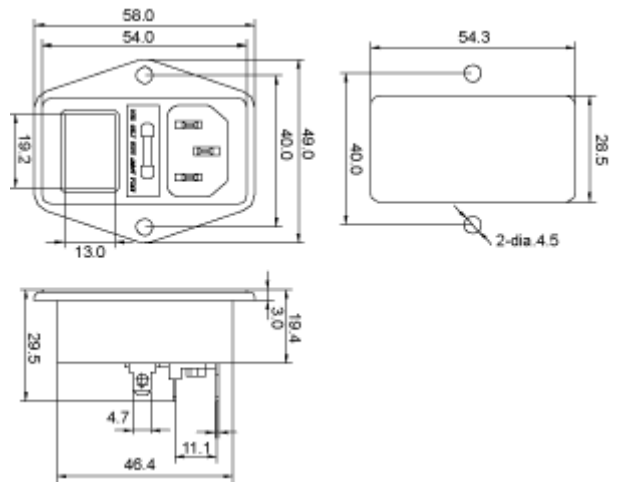

JR-101-1FRS(10)-04

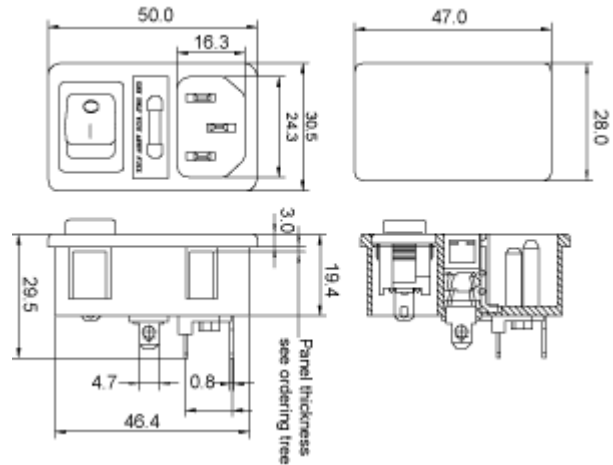

JR-101-1FSA-01

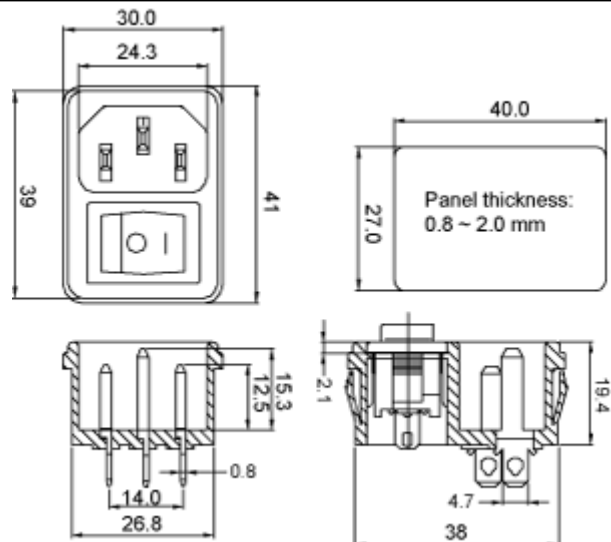

JR-101-1SB(10)-02

