

4

3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2015-07-06

Technical Data

Material:

Contact Material: Brass Au Plating over Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T+30%G.F

Electrical:

Current rating: 2Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega/\text{contact}$ Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$



Withstanding Voltage: 500V AC/minute

Mechanical:

Operating temperatures: -40°C to $+105^{\circ}\text{C}$

NO tes;

"A"20P以下一条,20-36P两条,40-50并3条

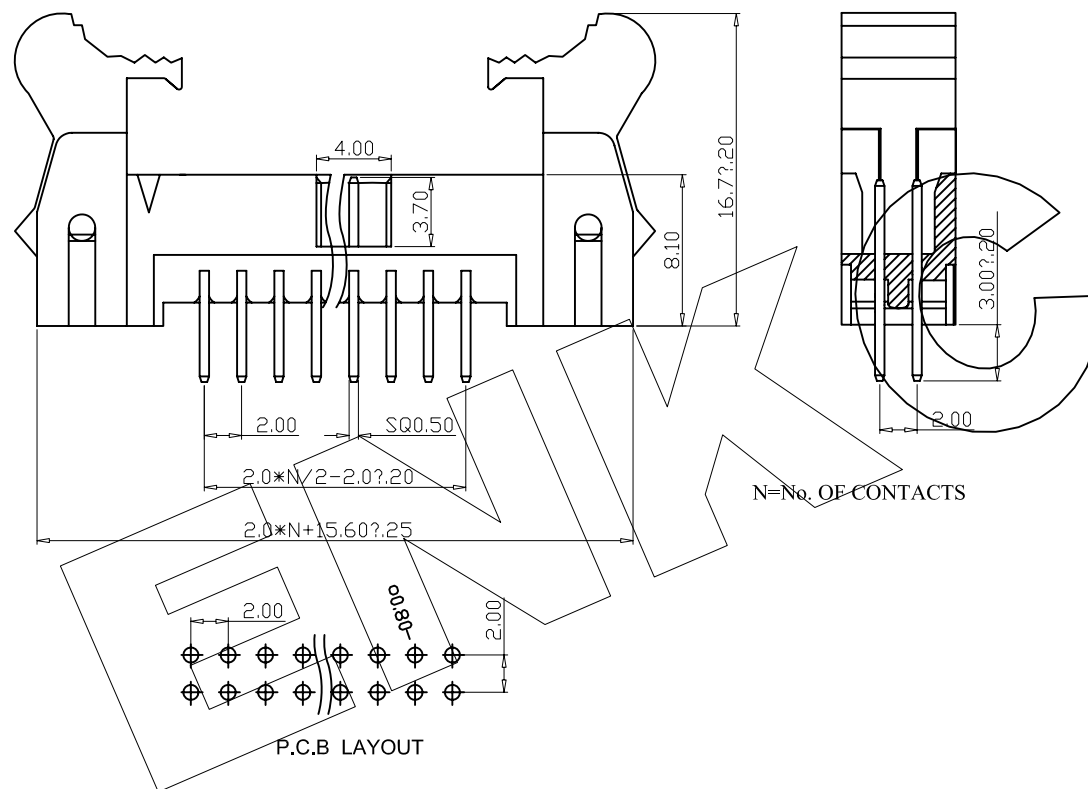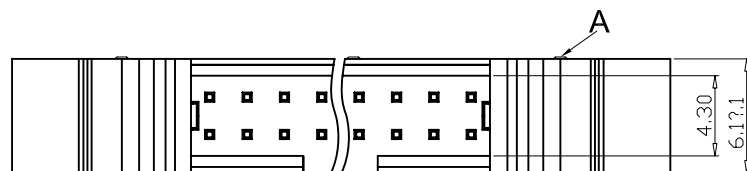

N=No. OF CONTACTS

P.C.B LAYOUT

BHJ

XXX

12

D

XX

X

X

X

D001

Pin位数
No. of Positions
XXX Positions产品型号
12 单塑双排产品折弯类型
D 180°端子电镀
00 无
G0 0.8μAu
G1 1μAu
G2 2μAu
G3 3μAu
G4 5μAu
G5 8μAu
G6 10μAu
G7 15μAu
G8 30μAu材质
A PBT
C PA-6T颜色
B 黑色
W 白色
L 蓝色
G 绿色
Y 黄色
R 红色
N 本色特征流水码
A A Type H8.95
B B Type H5.10针长/特征流水码
D001 L=10.5

ENKCOM 东莞市恩康电子有限公司

DONGGUAN ENKANG ELECTRONICS CO.,LTD

TOLERANCE	PROJECTON		TITLE: 2.0mm Pitch Double Row Straight Ejector Header
ANGLE $\pm 5^{\circ}$	DATE :	2015-07-06	
X.XXX ± 0.10	DRAWN :	Songjun	PART NO: BHJXXX12DXXXXXD001
X.XX ± 0.20	CHECKED :		DRAWING NO:
X.X ± 0.30	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X. ± 0.50			