

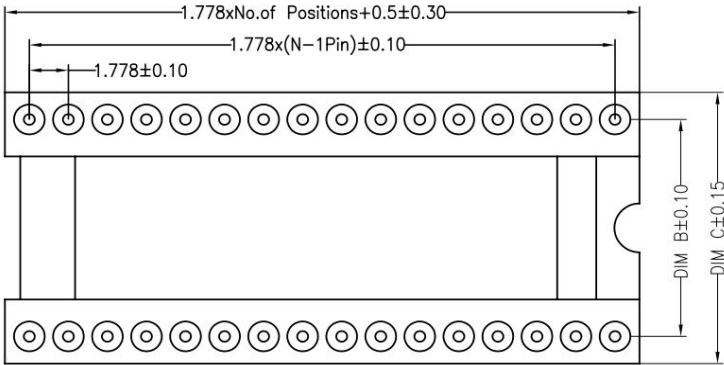
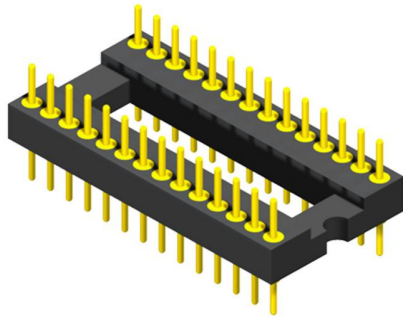


SPECIFICATIONS:

Contact Material	Brass (H59-3)
Contact Plating	Gold Flash
Insulator Material	PPS/BT (UL94V-0)
Rated Current	2.0 AMPS
Contact Resistance	20mΩ Max
Insulation Resistance	1000mΩ Min
Operating Voltage	60 AC/DC
Operation Temperature	- 40°C to +105°C
Soldering Temperature	260°C, 10s max



No. of Positions	B	C
16	7.62	10.16
24	10.16	12.7
28	10.16	12.7
30	10.16	12.7
32	10.16	12.7
48	10.16	12.7
20	15.24	17.64
24	15.24	17.64
28	15.24	17.64
40	15.24	17.64
42	15.24	17.64
48	15.24	17.64
52	15.24	17.64
56	15.24	17.64
64	15.24	17.64
68	15.24	17.64
64	19.05	21.45

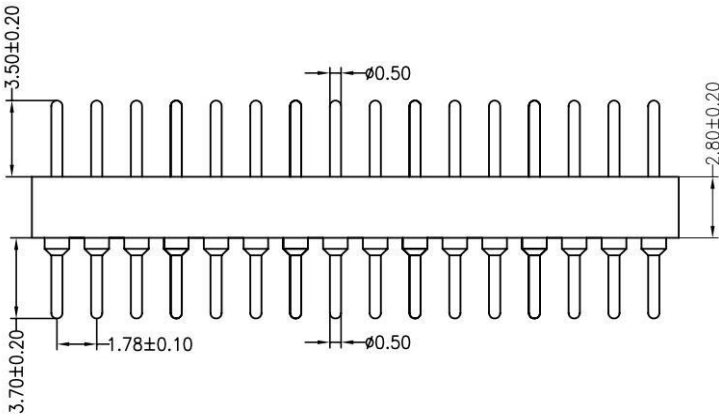

Ordering Information

HC Series	Insulator Width (B)	No. of Pin Per Row	Type	Plating Code	Insulator Option	PIN Length	Packing Code	End code
HC-ICM061-28	N=7.62	16P	S=Straight	G0=Gold Flash	A=PBT	100=10.0mm	0=PE Bag	01
1.778mm IC Socket	E=10.16	64P		SN=Tin Plated	G=PPS		T=Tube	
	W=15.24			SM=Matted Tin				
				S0=Gold/Tin				
				G1=3u Gold				
				G2=5u Gold				