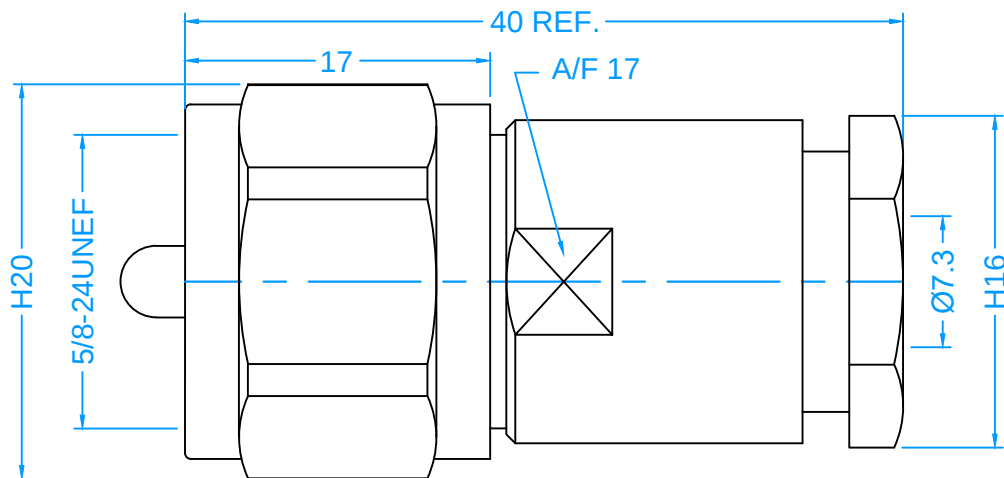


RECOMMENDED STRIP DIMS.

Meets IEC60169-12, GB/T 15888. Precision Machined and High Quality Grade Material


TECHNICAL CHARACTERISTICS

Impedance 50Ω
Working Voltage 750V r.m.s
Center Contact Resistance ≤5mΩ
Insulation Resistance ≥5000MΩ
Temperature Range -55°C to 155°C

Frequency Range DC-300MHz
Withstanding Voltage 2000V r.m.s
Outer Contact Resistance ≤5mΩ
Durability ≥500 cycles
Weight 47.53g Ref.

8	Coupling Nut	1	Brass	Nickel
7	Nut	1	Brass	Nickel
6	Clamp	1	Brass	Nickel
5	Washer	2	Brass	Nickel
4	Gasket	1	Silicone	
3	Contact	1	Brass	Gold
2	Insulator	2	PTFE	
1	Body	1	Brass	Nickel
No.	Description	QTY	Material	Finish

RoHS
Compliant



THIRD ANGLE PROJECTION

* MAJOR DIMENSION
UNLESS OTHERWISE
NOTED TOLERANCES

APPROVED
TERRY

CHECKED
JOHN

DRAWN
KEVIN

DRAWN DATE
12 Sep. 2012

KM KeMy Electronic Technology Inc.

TITLE
UHF (M) Plug, PL-259, Clamp, for
RG213

DRAWING NO. KM-011314-213

REV
0