

KCodes 604n

USB DEVICE SERVER

Print, Scan, and Fax over Network Share Multifunction Printer, Scanner, and Fax
Install Multifunction Printer Driver without Connecting the Multifunction Printer to the PC
Access Multifunction Printer's Memory Slots over Network
Access Digital Camera over Network
iTunes Syncs with iPhone and iPod over Network
Play Back Music to Remote Speakers
Share Hard Drives over Network



7
2000

XP
SERVER
2000

VISTA
SERVER
2003



Tiger
10.4

Leopard
10.5

Snow
Leopard
10.6

Languages

EN

繁体



1 Functions

- 1.1 Plug and Play Installation
- 1.2 Access USB Devices over Network. Mobiles users no longer need to go through the hassles of connecting USB devices' cables
- 1.3 Print and Obtain Printer Status, Scan, and Fax over Network. Share Multifunction Printer, Scanner, and Fax
- 1.4 Install Multifunction Printer Driver without Connecting the Multifunction Printer to the PC
- 1.5 Access Multifunction Printer's Memory Slots over Network
- 1.6 Share USB Storage over Network
- 1.7 Access Digital Camera over Network
- 1.8 Sync iTunes with iPhone and iPod over Network
- 1.9 Play Back Music to Remote Speakers

2 Hardware Specification


- 2.1 Wireless LAN
 - 2.1.1 IEEE 802.11n 1T1R
 - 2.1.2 Wi-Fi Protected Setup
 - 2.1.3 Ad-Hoc Mode and Infrastructure Mode
 - 2.1.4 WEP (64/128), WPA-PSA (TKIP/AES), and WPA2-PSK (AES)
 - 2.1.5 External Antenna
- 2.2 LAN: 10-BaseT and 100Base-TX RJ-45
- 2.3 4 USB Ports: USB 2.0 Hi-Speed Type-A
- 2.4 Power Switch: On and Off
- 2.5 Init Button
- 2.6 DC Jack: DC12V
- 2.7 LED Indicators: Power, WLAN, LAN, USB1, USB2, USB3, USB4
- 2.8 Microprocessor: Ralink RT3350 MIPS 320MHz
- 2.9 Non-Volatile Memory: 4MBytes
- 2.10 Dynamic Random Access Memory: 16Mbytes
- 2.11 Dimensions: W:128mm×D:99mm(119mm with Antenna)×H:25mm W:170.6g
- 2.12 Operating Temperature and Humidity: 5°C~40°C, 0%-70%

3 Software Specification

- 3.1 Network Protocols: IPv4 TCP/IP
- 3.2 Configuration: TFTP, DHCP, UPnP, HTTP, Remote Firmware Upgrade, Restart, Reset Factory Default
- 3.3 FAT32, FTP Server, and Unicode SMB/CIFS Server
- 3.4 USB Hub Extension Supported
- 3.5 Maximum USB Devices Supported: 127
- 3.6 Supported USB Devices: Multifunction Printer, Scanner, Fax, Multifunction Printer, Hard Drive, iPhone, iPod, USB Digital TV Tuner, Digital Camera, USB Webcam, USB Speaker, USB CD, USB DVD
- 3.7 Web Server Supports English and Japanese
- 3.8 PC Utility Supports
 - 3.8.1 Windows 2000, Windows XP, Windows Vista, Windows 7, Windows Server 2000, and Windows Server 2003
 - 3.8.2 MacOS X 10.4 Tiger, MacOS X 10.5 Leopard, and MacOS X 10.6 Snow Leopard
 - 3.8.3 English and Japanese

4 Package Contents

- 4.1 KCodes USB Device Server 604n
- 4.2 AC Adaptor: Input AC100V~240V 50/60Hz 1A, Output DC12V
- 4.3 CD ROM
- 4.4 Quick Installation Guide
- 4.5 Giftbox

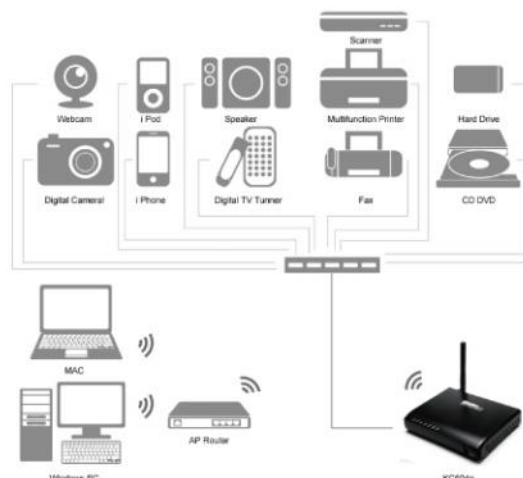

Address: 2F, No 501, Sec 2, Tiding Blvd, Neihu District, Taipei 114, Taiwan
Tel: (O) +886-2-2656-2386
Fax: (F) +886-2-2797-6047
Product: sales@kcodes.com
Support: sales@kcodes.com